

NEED HELP?
Call or Email us first

Our service team is ready to answer your questions...
1-800-265-1833 (English) / 1-800-567-2513 (French)
IN CANADA - ressaiescanada@canarmna.ca - IN USA - ressaiesusa@canarmna.ca

Monday – Friday
8 AM - 5 PM E.S.T.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS
READ ALL INSTRUCTIONS

**IMPORTANT SAFETY
INSTRUCTIONS**
SAVE THESE INSTRUCTIONS

TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Pliers

Wiring supplies
as required by
local electrical
code

SAFETY PRECAUTIONS:


WARNING

1. THIS FIXTURE IS DESIGNED FOR 120 VOLT CIRCUIT. IF UNSURE ABOUT WIRING, CONSULT AN ELECTRICIAN.
2. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
3. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
4. THIS FIXTURE MUST BE GROUNDED PROPERLY. CONNECT THE GROUND WIRE (BARE COPPER OR GREEN) TO THE AC SUPPLY GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX. IF GROUND WIRE IS NOT AVAILABLE IN YOUR AC SUPPLY WIRE SYSTEM, PLEASE CONSULT A QUALIFIED ELECTRICIAN BEFORE PROCEEDING THE ELECTRICAL CONNECTION.



NOTE: To clean the fixture, turn off the power, wait for it to cool, and wipe the fixture with a clean, soft cloth.

INSTALLATION:

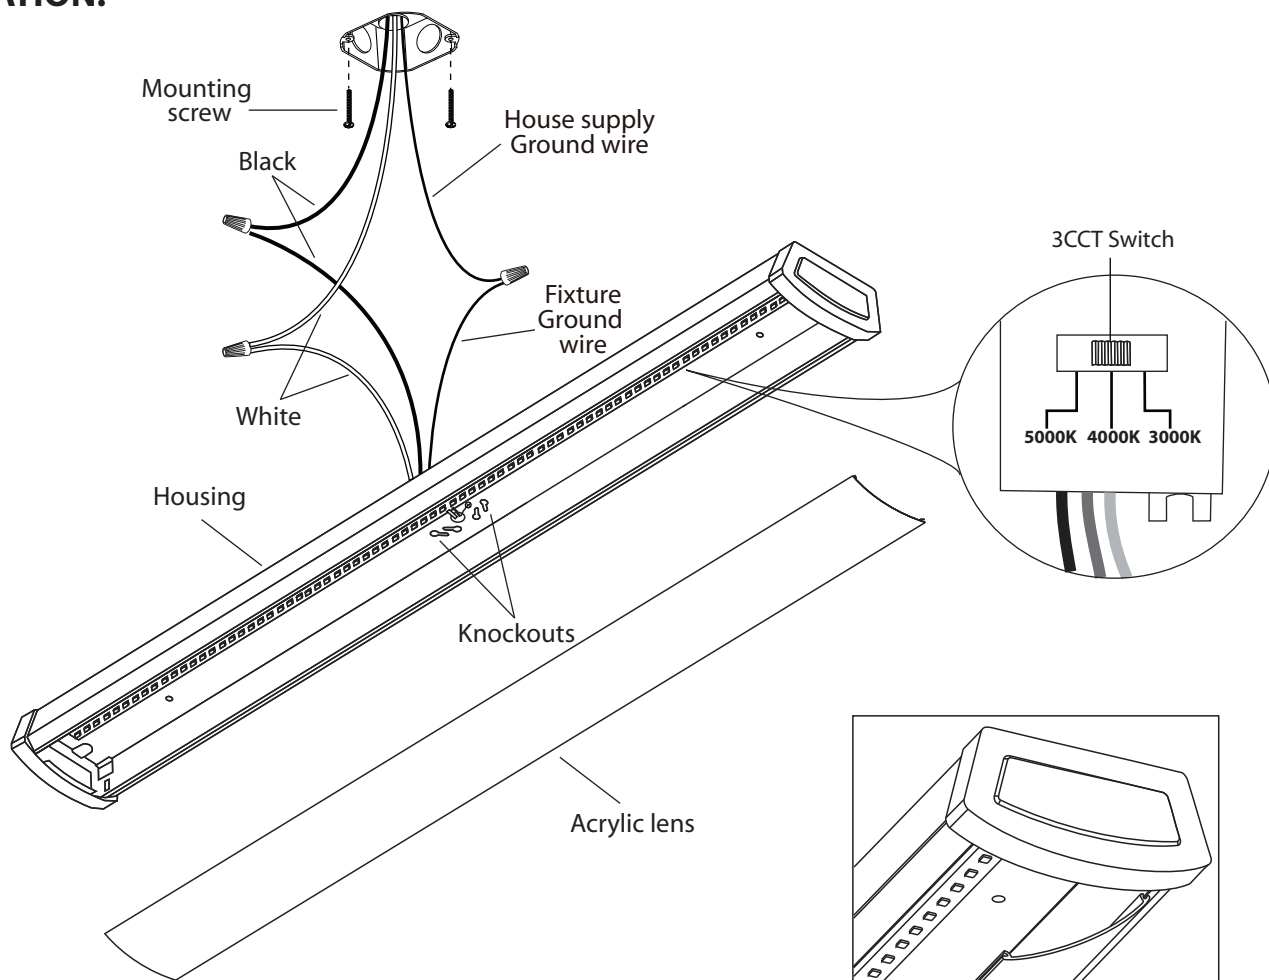

1. Gently squeeze one end of the lens to release from housing. Be careful not to crack the lens.
2. Secure the mounting screws (only screwing on halfway) to electrical box.
3. Remove knockouts (on the housing) corresponded to the mounting screws on the electrical box.

ATTENTION: Branch circuit conductors must be rated 194°F (90°C). Consult a qualified electrician before installing.

4. Connect the ground wire (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical box. Connect the black wire from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.
5. Once connections of wires are completed, carefully tuck wires and wire nuts into the electrical box making sure no bare wire (on the black and white) is visible at the wire nuts.
6. Attach the fixture to the mounting screws, turn fixture clockwise, and tighten screws.
7. Use the slide switch to choose a color temperature. The options are 3000K, 4000K and 5000K.
8. Insert lens slot onto the edge on one side of the housing. Squeeze lens carefully to sit on the other side of the housing. Continue this action down to the end of the lens until it sits fully into the housing.

Radar Motion Sensor Function Description:

- When the ambient light is bright enough, the light will not automatically light up even if a moving object is detected.
- When the ambient light is lower than the preset photosensitive threshold, the light will automatically light up when the sensor detects a moving object.
- After the moving object leaves, the sensor will enter the delay time ($30s \pm 10\%$) when it cannot detect the moving object and keep the light on.
- After the preset delay time ($30s \pm 10\%$), the light will automatically turn off.

Detection Diagram

