

Absorbant Glass Mat (AGM) technology for superior performance. Valve regulated, spill proof construction allows safe operation in any position. Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified. U.L. recognized under file number MH 20567.

Specification

Nominal Voltage	12 volts
Nominal Capacity	77° F (25° C)
20-hr. (1.30A)	26.0 Ah
10-hr. (2.42A)	24.2 Ah
5-hr. (4.42A)	22.1 Ah
1-hr. (15.6A)	15.6 Ah
Approximate Weight	17.0 lbs (7.7 kgs)
Internal Resistance (approx.)	14mΩ
Shelf Life (% of normal capacity at 68° F (20° C))	
3 Months	6 Months
91%	83%
6 Months	12 Months
83%	64%
Temperature Dependency of Capacity (20 hour rate)	
104° F (40°C)	77° F (25°C)
102%	100%
77° F (25°C)	32° F (0°C)
	5° F (-15°C)
85%	65%
AGM Operational Temperature	
Charge	32°F to 104°F (0°C to 40°C)
Discharge	5°F to 113°F (-15°C to 45°C)
AGM Storage Temperature	5°F to 104°F (-15°C to 40°C)



Due to continuous improvements to our products, product may vary slightly from depiction.

Charge Method (Constant Voltage)


Cycle Use (Repeating Use)

Initial Current	7.8 A or smaller
Control Voltage	14.6 - 14.8 V

Float Use


Control Voltage	13.6 - 13.8 V
-----------------	---------------

Physical Dimensions: in (mm)




L: 6.57in (166.9 mm)
W: 7.00in (177 mm)
H: 5.04in (128 mm)
TH: 5.04in (128 mm)
 Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

Terminals




Dimension	M	Ø	H
Type	I 2		
	6.00 mm 0.24 in	15.0 mm 0.59 in	3.00 mm 0.12 in


Discharge Time vs. Discharge Current

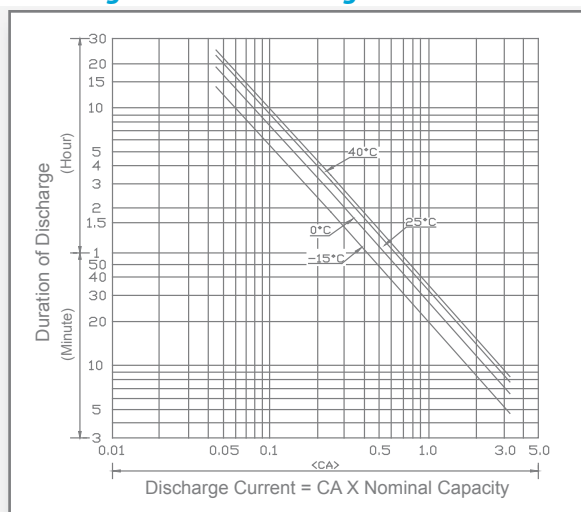


Discharge Characteristics

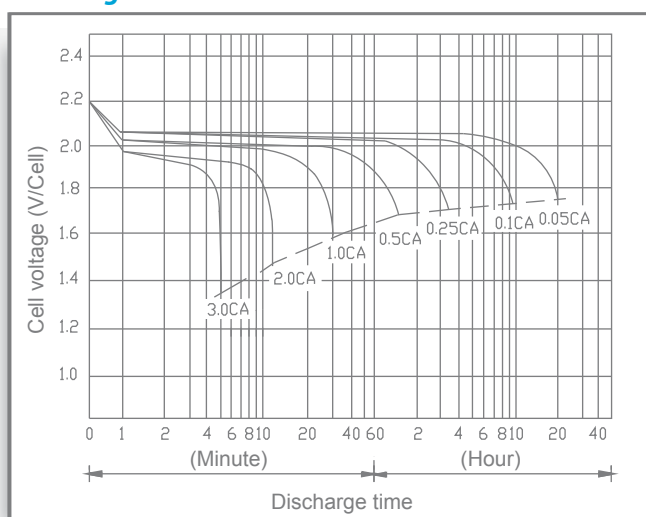


Shelf Life & Storage

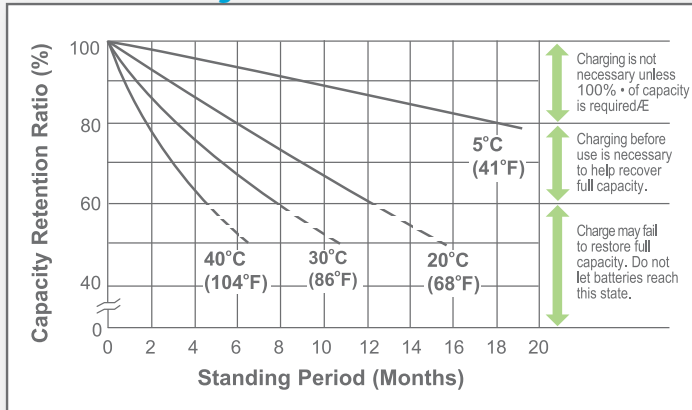


Cycle Life vs Depth of Discharge

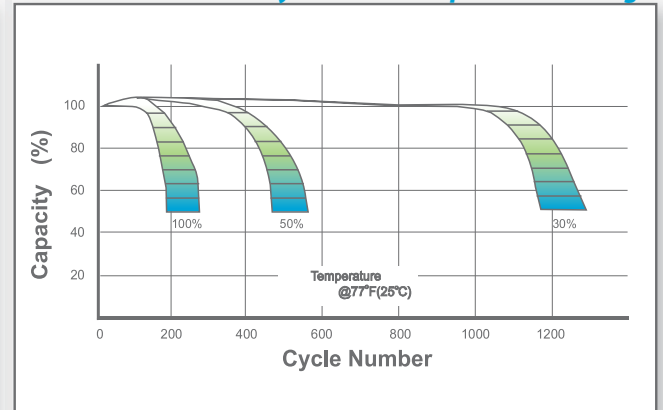

Open Circuit Voltage vs Residual Capacity

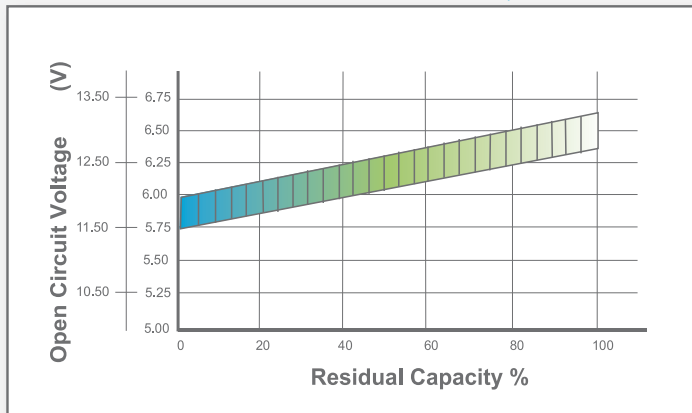

Effect of Temperature on Capacity

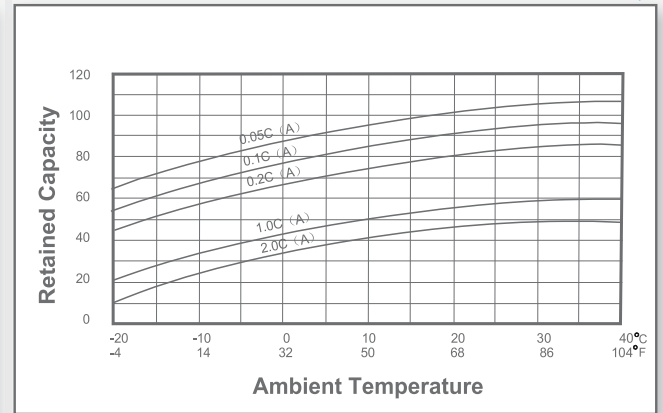

Charge Current & Final Discharge Voltage

Application	Charge Voltage(V/Cell)			Max.Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C(77°F)	2.45	2.43~2.47	0.30C
Standby	25°C(77°F)	2.28	2.27~2.30	

Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C