

Absorbant Glass Mat (AGM) technology for superior performance. Valve regulated, spill proof construction allows safe operation in any position. Approved for transport by air. D.O.T., I.A.T.A., F.A.A and C.A.B. certified. U.L. recognized under file number MH 20567

Specification

Nominal Voltage		12 volts					
Nominal Capacity		77° F (25° C)					
20-hr.	(5.00A)	100 Ah					
10-hr.	(9.30A)	93.0 Ah					
5-hr.	(17.0A)	85.0 Ah					
1-hr.	(60.0A)	60.0 Ah					
Approximate Weight		55.0 lbs (24.9 kgs)					
Internal Resistance (approx.)		5mΩ					
Shelf Life (% of normal capacity at 68° F (20° C)							
3 Months		6 Months		12 Months			
91%		83%		64%			
Temperature Dependency of Capacity				(20 hour rate)			
104° F (40°C)		77° F (25°C)		32° F (0°C)		5° F (-15°C)	
102%		100%		85%		65%	
AGM Operational Temperature							
Charge				32°F to 104°F (0°C to 40°C)			
Discharge				5°F to 113°F (-15°C to 45°C)			
AGM Storage Temperature				5°F to 104°F (-15°C to 40°C)			



Due to continuous improvements to our products, product may vary slightly from depiction.

Charge Method (Constant Voltage)


Cycle Use (Repeating Use)

Initial Current	30 A or smaller
Control Voltage	14.6 - 14.8 V

Float Use


Control Voltage	13.6 - 13.8 V
-----------------	---------------

Physical Dimensions: in (mm)



L: 12.2in (310mm)
W: 6.61in (168 mm)
H: 8.30in (211mm)
TH: 8.47in (215mm)
 Tolerances are +/- 0.04 in. (+/- 1mm)
 and +/- 0.08 in. (+/- 2mm) for height
 dimensions. All data subject to
 change without notice.

Terminals









Type	M	Ø	H
I 6	6.00 mm 0.24 in	16.0 mm 0.63 in	4.00 mm 0.16 in

Constant Current Discharge Characteristics Unit:A (25°C, 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	351.5	256.5	180.5	109.3	57.0	33.3	24.4	19.0	15.7	11.0	10.0	5.4
10.20V	309.7	233.7	161.5	103.6	53.6	31.7	23.8	18.5	15.4	10.8	9.7	5.3
10.50V	298.3	222.3	152.0	100.7	52.3	31.0	23.2	18.2	15.2	10.7	9.5	5.2
10.80V	286.9	210.9	142.5	97.9	50.4	30.2	22.6	18.0	14.8	10.5	9.5	5.1
11.10V	275.5	199.5	133.0	95.0	48.5	29.5	21.9	17.4	14.4	10.2	9.0	4.9

Constant Power Discharge Characteristics Unit:W (25°C, 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	3732.6	2818.7	1917.1	1160.0	660.3	384.8	283.1	220.4	181.5	128.3	115.9	62.4
10.20V	3438.1	2594.5	1792.7	1149.5	620.4	367.7	275.5	214.7	142.6	125.4	113.1	60.8
10.50V	3383.0	2521.3	1723.3	1141.9	600.4	359.1	268.9	210.9	175.8	124.5	111.2	60.0
10.80V	3339.3	2454.8	1658.7	1139.1	584.3	351.5	263.2	207.1	172.9	121.6	110.2	59.8
11.10V	3278.5	2374.1	1582.7	1130.5	576.7	350.6	260.3	206.2	172.0	120.7	107.4	58.0

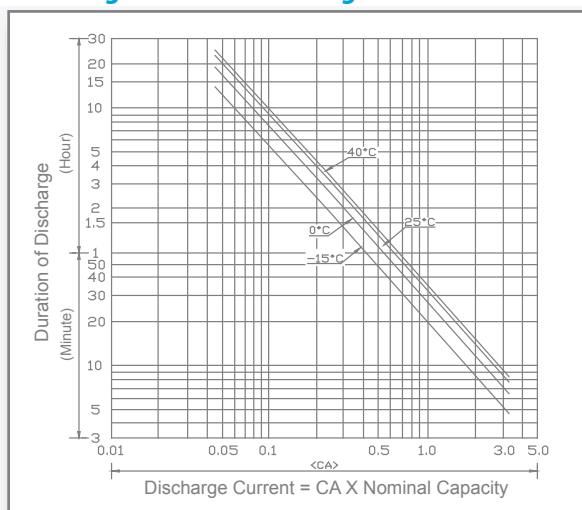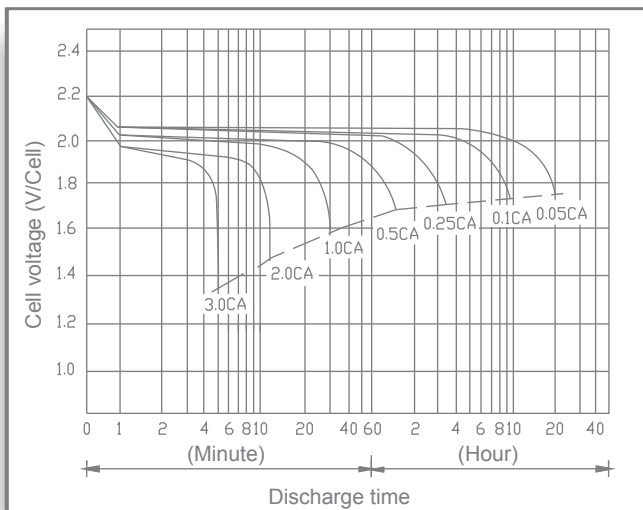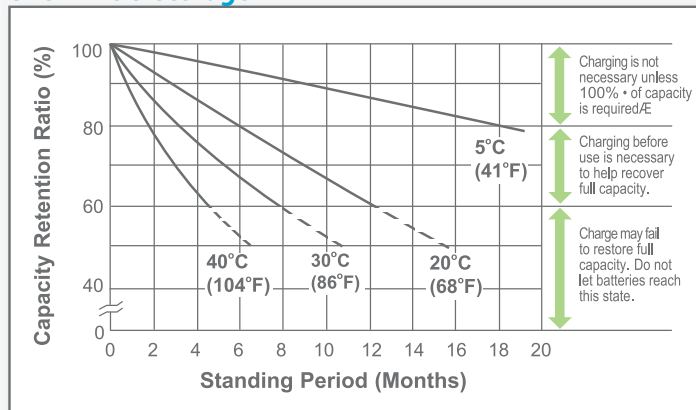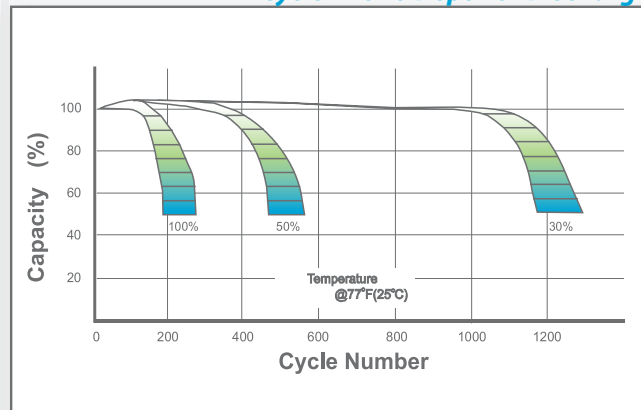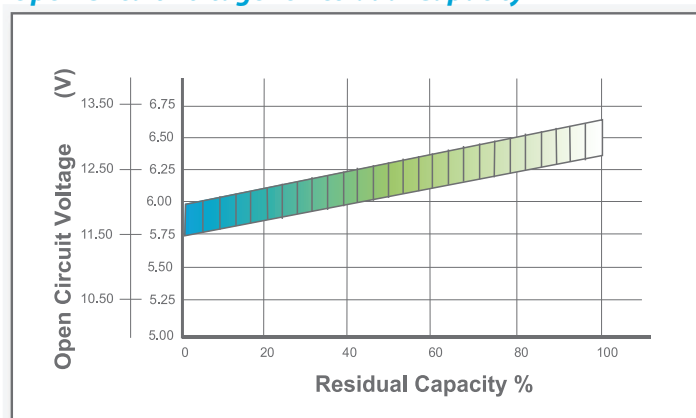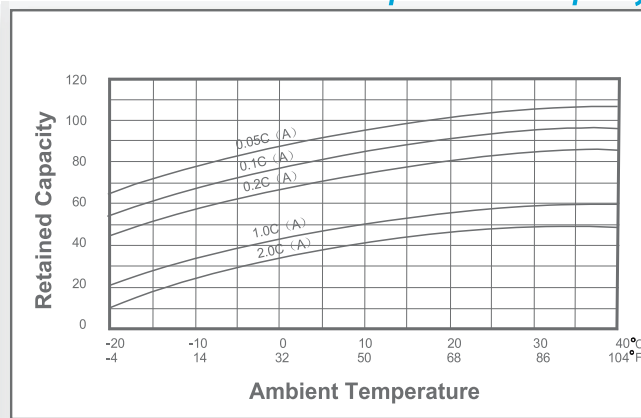Discharge Time vs. Discharge Current**Discharge Characteristics****Shelf Life & Storage****Cycle Life vs Depth of Discharge****Open Circuit Voltage vs Residual Capacity****Effect of Temperature on Capacity****Charge Current & Final Discharge Voltage**

Application	Charge Voltage(V/Cell)			Max.Charge Current	Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
	Temperature	Set Point	Allowable Range						
Cycle Use	25°C(77°F)	2.45	2.43~2.47	0.30C	Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C
Standby	25°C(77°F)	2.28	2.27~2.30						