




# MULTI-SURFACE MAGNET

## ASSEMBLY INSTRUCTIONS

- 1) Mount wheels onto axle using 3/4" wrench. To adjust axle height, loosen the 1/2" nut on the axle assembly and slide the axle bolt up or down to desired height.
- 2) Mount the handle onto unit with the 5/16" carriage bolt and wing nut.
- 3) Optional Rake: Mount rake onto the sweeper by sliding the carriage bolt through the rake mount and the handle.

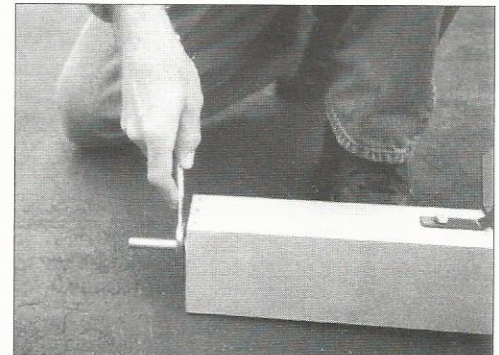

## OPERATING INSTRUCTIONS

The Multi-Surface Magnet is simple to operate. Push the sweeper over the magnetic debris you want to remove and pull on the lift handle when you wish to release the load. This action lifts the unit's internal magnet away from the magnetic particles and allows them to fall to the surface.

Axle height should be adjusted to a higher setting for rough surfaces and a lower position for smooth areas. (The closer the magnet base is to the ground, the more material it can grab).

***To avoid internal damage of the magnet,  
do not drop the sweeper or bang it against hard objects.***