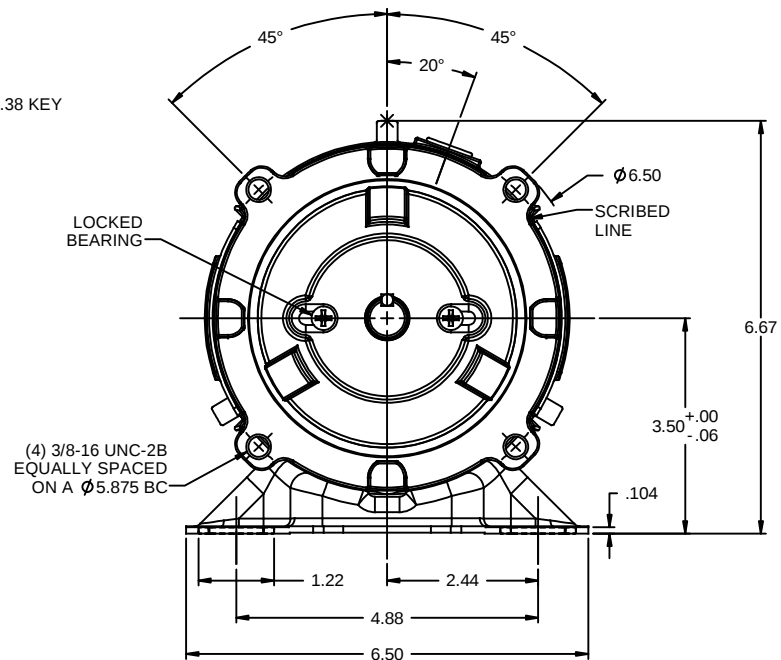
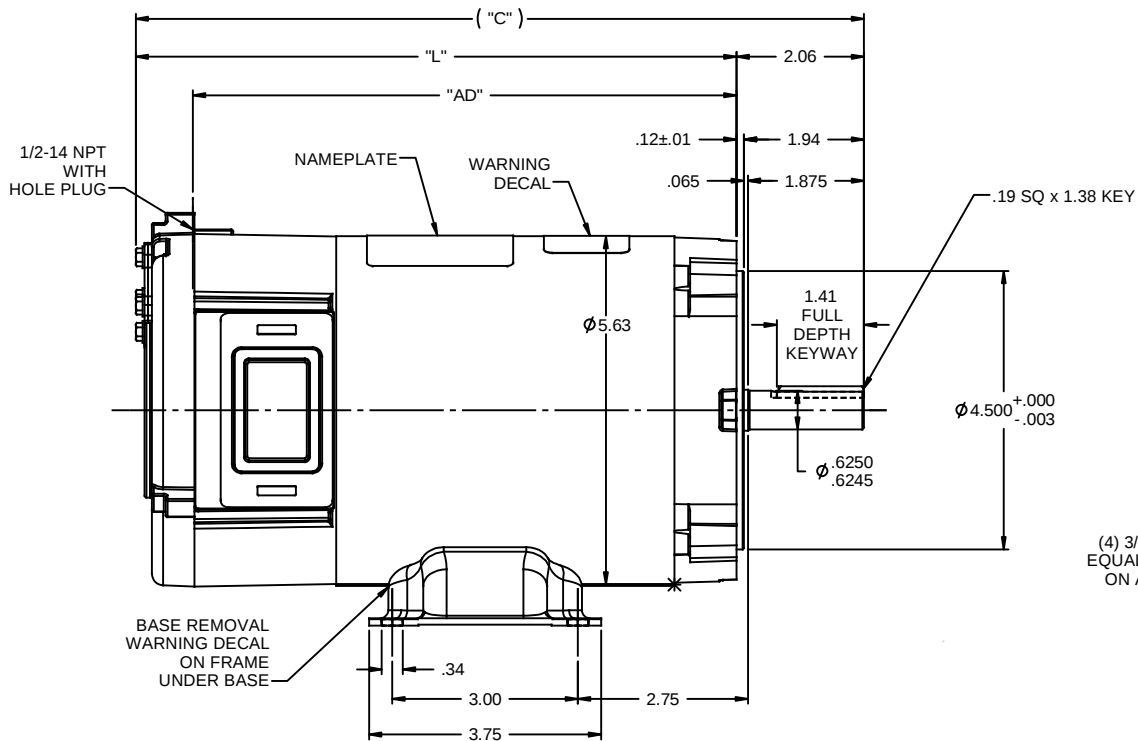


- NOTES:
- 1) MAXIMUM FACE RUNOUT .004 T.I.R.
 - 2) MAXIMUM PILOT ECCENTRICITY .004 T.I.R.
 - 3) PERMISSIBLE SHAFT RUNOUT .002 T.I.R.
 - 4) GASKETS THROUGHOUT

108051.00	11.77	9.71	8.78	24	1/2	1800
108050.00	10.77	8.71	7.78	24	1/3	1800
108047.00	11.77	9.71	8.78	12	1/2	1800
108046.00	10.77	8.71	7.78	12	1/3	1800
108045.00	10.27	8.21	7.28	12	1/4	1800
CATALOG No.	"C"	"L"	"AD"	VOLTS	H.P.	RPM

			TOLERANCES UNLESS SPECIFIED		 ELECTRIC MOTORS GEARMOTORS AND DRIVES		DRAWN IPG 3/26/08	
			DEC	INCHES			CHK BC 3/26/08	
			X	±.1			APPR	
02	ADDED 108045.00 TO TABLE	IPG 5/13/2010	BC	XX	±.03	TITLE OUTLINE 48 FRAME DC	SCALE 1:2	
01	ADDED 20 DEGREES FOR NPT HOLE LOCATION	IPG 12/11/2008	SK	XXX	±.005		REF 031879.00	
RELEASED: REF. 031879 & 031185			IPG 3/26/2008	BC	XXX	±.0005	FMF 108050.75	
NO			REVISION	BY & DATE	CHK ANG ±1/2"	FINISH	PAGE OF	
			THIRD ANGLE PROJECTION		RFP	PREV	SIZE B	DRAWING NO 031880
					NETWORK FILE NAME 031880			REV 02