
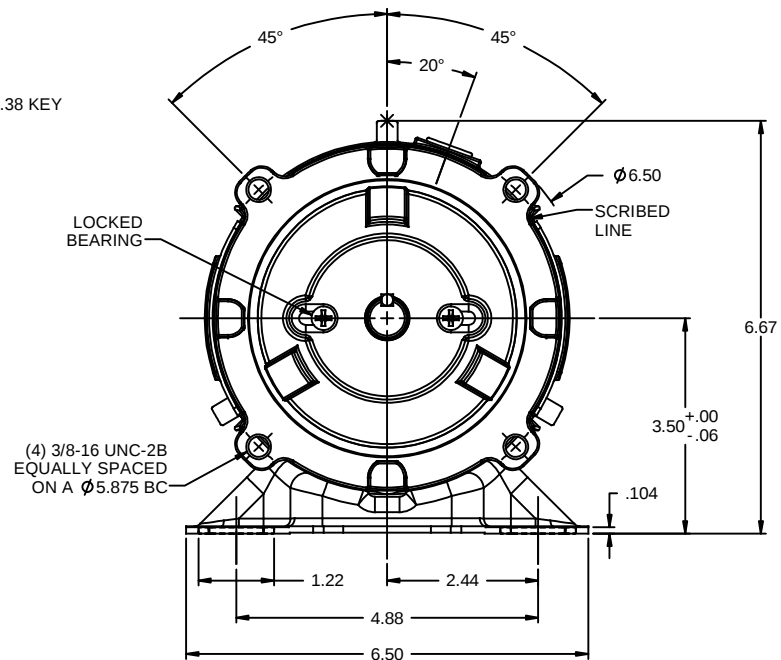


- NOTES:
- 1) MAXIMUM FACE RUNOUT .004 T.I.R.
 - 2) MAXIMUM PILOT ECCENTRICITY .004 T.I.R.
 - 3) PERMISSIBLE SHAFT RUNOUT .002 T.I.R.
 - 4) GASKETS THROUGHOUT

108051.00	11.77	9.71	8.78	24	1/2	1800
108050.00	10.77	8.71	7.78	24	1/3	1800
108047.00	11.77	9.71	8.78	12	1/2	1800
108046.00	10.77	8.71	7.78	12	1/3	1800
108045.00	10.27	8.21	7.28	12	1/4	1800
CATALOG No.	"C"	"L"	"AD"	VOLTS	H.P.	RPM

			TOLERANCES UNLESS SPECIFIED		DRAWN IPG 3/26/08	
			DEC INCHES		CHK BC 3/26/08	
			X ±.1		APPR	
02	ADDED 108045.00 TO TABLE	IPG 5/13/2010	BC	XX ±.03	SCALE 1:2	
01	ADDED 20 DEGREES FOR NPT HOLE LOCATION	IPG 12/11/2008	SK	XXX ±.005	REF 031879.00	
RELEASED: REF. 031879 & 031185			IPG 3/26/2008	BC XXXX ±.0005	FMF 108050.75	
NO REVISION			BY & DATE	CHK ANG ±1/2"	PAGE OF	
THIRD ANGLE PROJECTION			RFP	PREV	SIZE B	DRAWING NO 031880
			NETWORK FILE NAME 031880		REV 02	

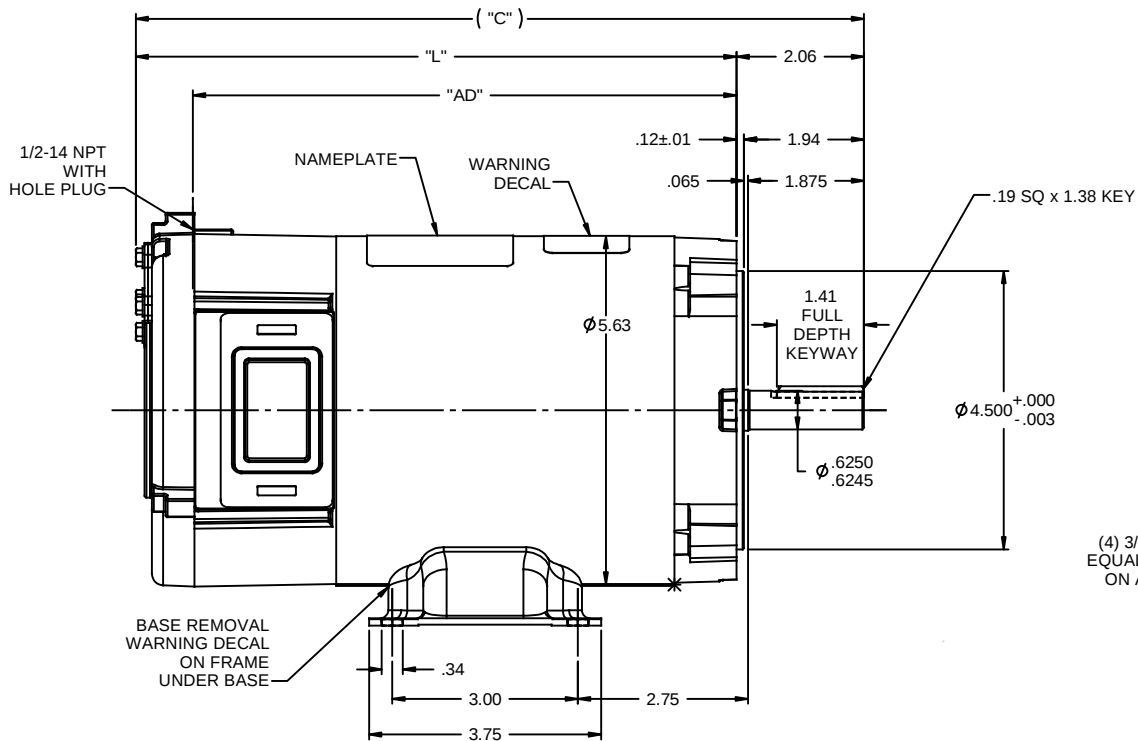

ELECTRIC MOTORS
GEARMOTORS
AND DRIVES