

# NORTHSTAR

## PUMP ANTIFREEZE PRESSURE WASHER

1. Turn off pressure washer and disconnect both inlet and outlet hoses.
2. Unthread and remove the cap/valve from NorthStar Pump Protector Antifreeze and **remove seal**.
3. **Re-attach** the Red Cap / Valve. Be sure the white valve is secured inside the cap.  
*Remove the black over-cap.*
4. Connect and **secure** the bottle to the garden hose inlet on the pressure washer pump.
5. **Squeeze** the bottle to prime and fill the pump with protectant and lubricant.

### 6. Final Step for Maximum Protection

*Gasoline Washers – with the **ignition off** pull the start cord to draw added protectant into the pump.*

*Electric Washers – briefly turn on washer and draw additional protectant into the washer pump.*


Valve



Re-attach



Secure

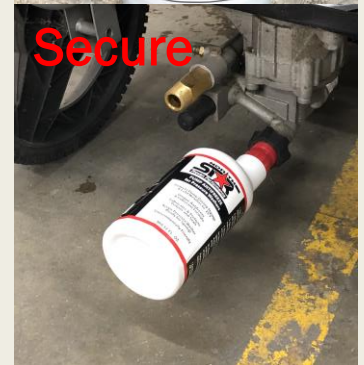

Squeeze



Pull