




Superior
Manufacturing
Group, Inc.

447 Comfort-Eze™ Anti-Fatigue/Anti-Slip Matting

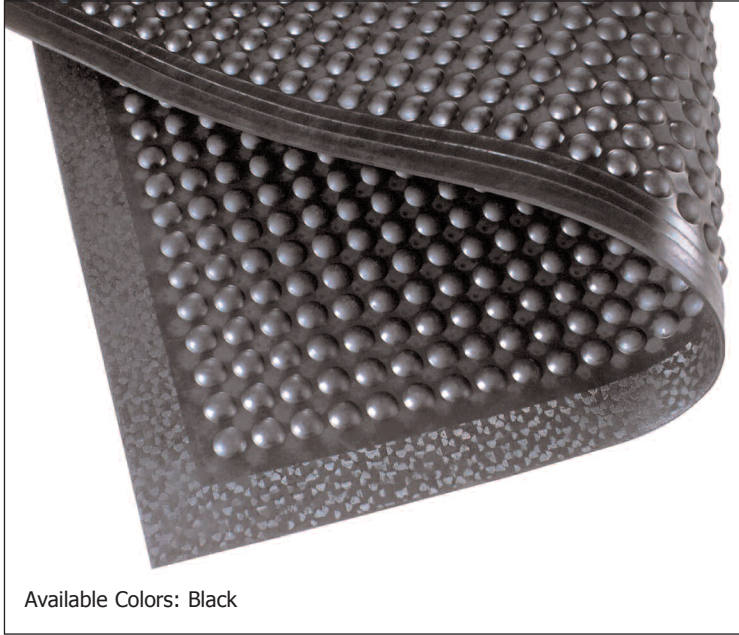

Available Colors: Black

Good Better Best Superior



Constructed of a unique solid rubber design, Cushion-Eze™ stimulates worker comfort and promotes product longevity. The bubble top and offset bubble bottom allow for air circulation enhancing the ergonomic effects. Recommended uses include packaging stations, quality inspection areas, shipping areas, and other light to medium duty dry areas.

Test	Test Description	*Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	.067" (20 lbs/sq. inch) .090" (40 lbs/sq. inch)
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	.80
Abrasion Resistance ASTM D3884-01	Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams)	8.58 Grams
Critical Radiant Flux ASTM E648-94A	The test result is an average critical radiant flux (watts/square cm) which indicates the level of radiant heat energy required to sustain flame propagation in the flooring system.	.30 watts/square cm

All testing of NoT rax floor matting has been performed by an independent testing laboratory .



Anti-Fatigue



Welding

- Solid Rubber construction
- Overall thickness: 3/8"
- All four sides are beveled to minimize trip hazards
- Stock Sizes: 24" x 36", 30" x 30", 30" x 60",
30" x 10', 30" x 20'



RESULTS FROM INDEPENDENT TEST LABS & PRESENTED AS
COMPARISONS TO OTHER NoTRAX® FOOD SERVICE MATS