



EXTREME-DUTY ADJUSTABLE TRAILER DOLLY 1000 LB. CAPACITY

OWNER'S MANUAL



WARNING:

Read carefully and understand all **ASSEMBLY AND OPERATION INSTRUCTIONS** before operating. Failure to follow the safety rules and other basic safety precautions may result in serious personal injury.

Item# 24383

Thank you very much for choosing an ULTRA-TOW Product! For future reference, please complete the owner's record below:

Model: _____ Purchase Date: _____

Save the receipt, warranty and these instructions. It is important that you read the entire manual to become familiar with this product before you begin using it.

This product is designed for certain applications only. The distributor cannot be responsible for issues arising from modification. We strongly recommend this product not be modified and/or used for any application other than that for which it was designed. If you have any questions relative to a particular application, DO NOT use this product until you have first contacted the distributor to determine if it can or should be performed on the product.

For technical questions please call **1-800-222-5381**.

INTENDED USE

Three wheel design makes maneuvering trailers easier than two wheel models. Versatile design features flat-free tires and an adjustable height for many different trailer tongue heights.

TECHNICAL SPECIFICATIONS

Item	Description
Capacity	1000 lbs.
Tires	(2) 16in. flat-free tires with 10in. flat-free third swivel wheel
Construction	Adjustable trailer hitch with 2in. ball

GENERAL SAFETY RULES



WARNING: Read and understand all instructions. Failure to follow all instructions listed below may result in serious injury.



CAUTION: Do not allow persons to operate or assemble this trailer dolly until they have read this manual and have developed a thorough understanding of how the hand truck works.



WARNING: The warnings, cautions, and instructions discussed in this instruction manual cannot cover all possible conditions or situations that could occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.

SAVE THESE INSTRUCTIONS

IMPORTANT SAFETY CONSIDERATIONS

TRAILER DOLLY USE AND CARE

- **Do not modify the trailer dolly in any way.** Unauthorized modification may impair the function and/or safety and could affect the life of the equipment. There are specific applications for which the trailer dolly was designed.
- **Always check of damaged or worn out parts before using the trailer dolly.** Broken parts will affect the trailer dolly operation. Replace or repair damaged or worn parts immediately.

- **Store idle trailer dolly.** When trailer dolly is not in use, store it in a secure place out of the reach of children. Inspect it for good working condition prior to storage and before re-use.



WARNING: When using product, basic safety precautions should always be followed to reduce the risk of personal injury and damage to equipment.

1. Design load limit is 1000 lbs. for the trailer dolly alone, not including load supported by the trailer wheels.
2. Always wear ANSI-approved safety goggles when working with tools and equipment.
3. Always keep hands, feet, and legs, out from under the trailer tongue while hitching, unhitching or moving the trailer. Children should always be kept at a safe distance.
4. Always make sure the loaded trailer is blocked properly while the trailer dolly is being moved into place.
5. Make sure the trailer tongue is securely connected to the trailer dolly coupler ball before attempting to un-block and move the trailer.
6. Take precautions to prevent uncontrolled movement of the trailer once it is connected to the trailer dolly. BE AWARE, the slope of a road or paved surface can be difficult to judge, and small slopes can result in a dangerously out of control trailer or situation.
7. If the trailer dolly is being connected to a trailer which is being stored over a lengthy period of time, make sure both the trailer and the trailer dolly are blocked securely.
8. Keep the trailer dolly clean and free of road salt or dirt. Inspect the trailer dolly before each use to make sure all parts are securely in place and in working order.
9. Periodically lubricate moving parts.


ASSEMBLY

It is important that you read the entire manual to become familiar with the product BEFORE you assemble and use the trailer dolly. Before assembling and operating the trailer dolly, be sure that you have all parts described in the Parts List and Assembly Diagram located on the last pages of this manual.

REFER TO PARTS LISTING FOR ASSEMBLY

1. Attach one side of middle handle (#8) to the axle assembly (#1) using bolt (#9) and nut (#10).
2. Connect axle assembly (#1), top handle (#14) and middle handle (#8) together using bolt (#9) and nut (#10).
3. Install caster (#12) with wheel mounting plate (#11) by using bolt (#9, #13) and nut (#10).
4. Install hitch ball (#7) onto the mount bracket (#6), then insert the mount bracket (#6) into axle assembly (#1) and secure with safety pin (#4) and pin shaft (#5).
5. Attached two wheels (#2) to axle assembly (#1) and secure them with washers (#3) and safety pin (#4).
6. Check and tighten all fasteners as needed.

PARTS AND ASSEMBLY DIAGRAM

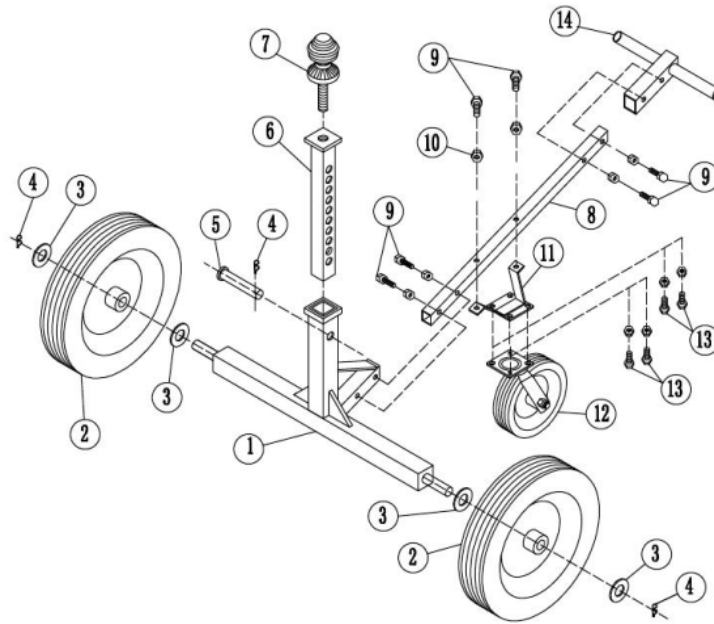

Part #	Description	Qty
1	Axle Assembly	1
2	16in. Wheels	2
3	Plate Washer	4
4	Safety Pin	3
5	Pin Shaft	1
6	2in. Ball Mount Bracket	1
7	2in. Trailer Hitch Ball	1
8	Middle Handle	1
9	Bolt M10x50	6
10	Nut M10	10
11	Wheel Mounting Plate	1
12	10in. Caster	1
13	Bolt M10x25	4
14	Top Handle	1

Note: Some parts are listed and shown for illustration purposes only and are not available individually as replacement parts.

For replacement parts and technical questions, please call 1-800-222-5381.

WARRANTY: One-Year Limited Warranty

ULTRA-TOW™

Distributed by
Northern Tool + Equipment Co., Inc.
Burnsville, Minnesota 55306-6936
NorthernTool.com
Made in China