



Blade Tip Power System


Addresses:

- Size (Small 6 feet – 1.8 m)
- Weight (Light 185 lbs – 84 kgs)
- Noise (Quiet 35 dB at 10 feet - 3.1 m)
- Blades (Shrouded, Enclosed)
- Vibration (Negligible, No Central Gear Box or Generator)

Energy Management System

The SmartBox Control System incorporates a proprietary control system that is specifically designed to capture the most efficient power from wind at its unpredictable patterns and dynamics. It functions as a sophisticated energy management system and also provides a simple and seamless interconnection to the grid. The Honeywell Wind Turbine and the SmartBox offers cutting-edge turbine technology to the individual, enabling each to harness, utilize and manage

the energy at their local wind zone. The SmartBox is the control system that consists of a charge controller and a non-grid tie 1.5 kW inverter. Included within the charge controller is an automatic AC transfer switch that will automatically switch between your AC grid and power generated via the turbine. The Honeywell Wind Turbine works seamlessly with grid tie or DC Charge controllers. Refer to items A through D on prior page under Connection Options.



SmartBox Control System incorporates:

- Optimal Power Transfer Controller
- True Sine Wave Inverter
- Battery Power Management System
- Wind Direction & Speed Measurement Control System



Utility Grid Tie System

The Honeywell Wind Turbine can also be configured with the Aurora® grid tie inverter for simple connectivity to any utility or building (F.I.T. or net metering).

Aurora® inverters operate at 96% efficiency and comply with standards set for grid tied operation, safety, and electromagnetic compatibility including: UL1741/IEEE1547 & CSA-C22.2 N.107.1-01, VDE0126, CEI 11-20, DK5940, CEI64-8, IEC 61683, IEC 61727, EN50081, EN61000, CE certification, El Real Decreto RD1663/2000 de España.

A Wind Turbine Like No Other In...

- Residential
- Commercial
- Agricultural
- Remote
- Towers
- Energy Recovery
- Education
- Design
- Size
- Startup speed
- Ease of Permitting
- Efficiency
- Quiet Operation



Honeywell Model WT6500 Specifications


Enclosed Blade Tip Power System (BTPS)	Wide Wind Acceptance – Auto Directional	Connects to building, utility or battery charge controller
BTPS Permanent Magnet Electric Generator	Cut in wind speed 0.5 mph (0.2 m/s)	Optional Controllers included: Aurora®, OutBack™, SmartBox or DC Charger
ETL Listed, Conforming to UL 1741 & CAN/CSA C22.2 No. 107.1	Acoustic Noise Emissions < 35dB at 10 feet (3.1 m)	5 Year Limited Warranty
Blades – Glass Filled Nylon Composite	Designed to withstand winds up to 140 mph (62.6 m/s)	Annual CO2 Displacement 2.2 Tons
Tip to Tip Blade Dimension 5.7' (1.7 m)	Shut down wind speed 38 mph (17.0 m/s)	Electromagnetic Braking System

Description	Product Dimensions					
	Part Number	GTIN / UPC (Sellable Unit)	Weight (All Weights in lbs)		Dimensions (All in Inches)	
			Unit	Shipping	Unit	Shipping
Honeywell WT6500 Wind Turbine	WT6500	824309100014	185**	400	78.7 W x 85 H x 19.5 Deep	85 W x 89 H x 21 Deep
SmartBox™ 120V/50Hz NGT (Non-Grid Tie)	SB650012050NGT	824309200127	58	66	20 L x 20.125 W x 9.0 Depth	25 L x 25 W x 23.76 H
SmartBox™ 120V/60Hz NGT (Non-Grid Tie)	SB650012060NGT	824309200028	58	66	20 L x 20.125 W x 9.0 Depth	25 L x 25 W x 23.76 H
SmartBox™ 230V/50Hz NGT (Non-Grid Tie)	SB650023050NGT	824309200073	58	66	20 L x 20.125 W x 9.0 Depth	25 L x 25 W x 23.76 H
SmartBox™ 230V/60Hz NGT (Non-Grid Tie)	SB650023060NGT	824309200097	58	66	20 L x 20.125 W x 9.0 Depth	25 L x 25 W x 23.76 H
Aurora® Inverter 3.0kW (Grid Tie)	POGT6500***	824309500***	38	45	28.5 L x 15.5 W x 15 H	24.5 L x 12.75 W x 8.25 H
OutBack™ Inverter 3000W 120/60Hz w/ Battery Backup (Grid Tie)	OBT6500	824309400022	62	69	16.25 L x 8.25 W x 14 H	22 L x 13 W x 22 H
DC Charge Controller 12/24/48V	DCCC6500	824309400015	13.2	14.96	14.7 L x 11.9 W x 6.6 H	18.15 L x 12.441 W x 12.441 H
QuadPod™ Fixed Mount	MQP6500	824309300049	165	170	72 L x 46 W x 12 H	74 L x 48 W x 12 H
QuadPod™ Ballast Attachment	MQP6500B	824309300056	374	374	46 L x 45 W x 6 H	46 L x 45 W x 6 H
Pole Coupler	MPT6500	824309****	100	105	31 L x 33 W x 19 H	32 L x 34 W x 20 H

Turbine weight does not include the weight of connection box, mounts or directional fins. *Part number for Aurora® Grid Tie Inverter and Pole Coupler are dependent on model selection.

Turbine Package
Dimension in inches: 85 W 89 H 21 Deep
Gross weight: 400 lbs

Power Curve

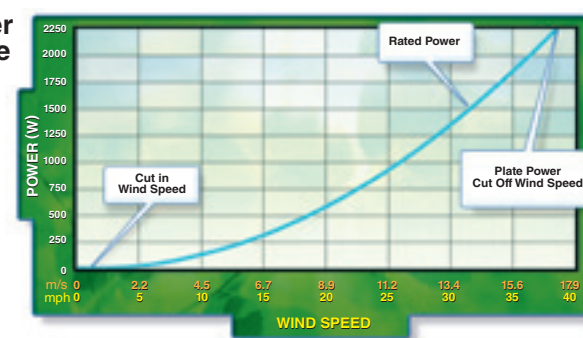

Power Output

- 1,500 Watts at 31 mph
- 2,200 Watts at 38 mph Peak Rating

Energy Output

- 2752 kWh/yr maximum output constant wind (Class 4 DOE)

WindTronics™

380 W. Western Suite 301
Muskegon, MI 49440
toll free 877.946.3898
local 231.332.1200
fax 231.726.5029

www.windtronics.com
info@windtronics.com

The Honeywell Trademark is used under license from Honeywell International Inc. Honeywell International Inc. makes no representation or warranties with respect to this product.

WIND-02-2011
February 2011
Printed in Canada
© 2011 WindTronics™ Inc.



WT6500 Wind Turbine



A WIND TURBINE LIKE NO OTHER – ALWAYS TURNING

Blade Tip Power System

Today's wind energy...

like no other.



Blade Tip Power System


Gearless Blade Tip Power System – the future of wind power

The innovative Blade Tip Power System (BTPS) is the patented technology created by WindTronics™. The Honeywell Wind Turbine utilizes a system of magnets and stators surrounding its outer ring capturing power at the blade tips where speed is greatest, practically eliminating mechanical resistance and drag. Rather than forcing the available wind to turn a generator, the perimeter power system becomes the generator by swiftly passing the blade tip magnets through the copper coil banks mounted onto the enclosed perimeter frame. The Blade Tip Power System addresses past constraints such as size, noise, vibration and output. The enclosed perimeter shrouds the system and is more distinguishable to wildlife. WindTronics' proprietary systems are breaking traditional technological barriers across multiple markets, for homes and businesses, for both energy generation and energy recapture even in moderate winds.

Introducing a breakthrough wind energy system for home and business

The Honeywell Wind Turbine is a gearless wind turbine that measures just 6 feet (1.8 m) in diameter, weighs 185 lbs (84 kgs) and produces up to 1500 kWh per year depending on height and location. The Honeywell Wind Turbine's BTPS perimeter power system and unique design of multi-stage blades allows the system to react quickly to changes in wind speed. This ensures that the maximum wind energy is captured without the typical noise and vibration associated with traditional wind turbines. The Honeywell Wind Turbine

has an increased operating span over traditional turbines with a start-up speed as low as 0.5 mph (0.2 m/s), with an auto shut off at 38 mph (17.0 m/s), traditional gearbox turbines require minimum wind speeds of 7.5 mph (3.5 m/s) to cut in and start generating power. The Honeywell Wind Turbine is designed to be installed by a licensed electrician wherever energy is consumed, turning homes and businesses from points of total consumption to distributed energy sources, in a cost effective and efficient manner.

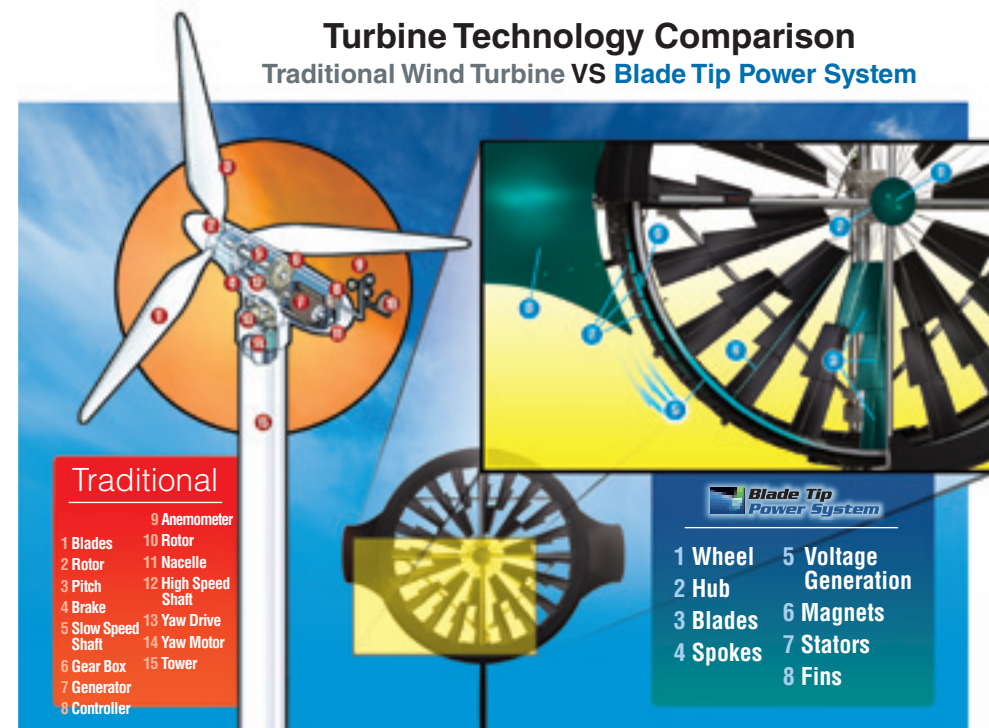

Turning a wind turbine into a wind generator by eliminating the gear box.

Turbine Mounting Options: At 185 lbs (84 kgs) and 6 feet (1.8 m) versatile – like no other.

Flat Roof (Commercial)

QuadPod and Ballast Mount



Pitched Roof

QuadPod and Roof Box



Pole Mount (Commercial or Residential)



Cell Tower Mount (Commercial)



Directional Fins & Braking

The directional fins continuously guide the turbine for maximum wind exposure. The system starts turning at 0.5 mph (0.2 m/s), automatically shuts down in high winds (+38 mph [+17.0 m/s]) through its electromagnetic braking system and is designed to withstand winds up to 140 mph (62.6 m/s).

FAQ's

Many factors will affect the output of the turbine at each location depending on placement. Your location can be affected by trees, terrain and obstructions.

- Always seek the highest elevation and lowest obstruction field as possible (33 feet (10.0 m) minimum, the higher the better).

- You may advise your city, town or neighbors that you're installing a new generation wind turbine, but at 185 lbs (84 kgs), 6 feet (1.8 m), 35 dB at 10 feet (3.1 m), it may be not necessary. We're here to help you.
- An average annual wind rating of 12 mph (5.4 m/s) is recommended as a good minimum wind speed to keep in mind, off grid locations might consider less.

- The Honeywell Wind Turbine is designed for all environments from hot to cold temperatures and from coastal locations to mountaintops.
- Electrical connection is very similar to a backup generator connected to the building or solar power to the grid. Refer to connection options A through D.
- The system is designed to be installed by a licensed electrical contractor.

WindTronics™ has created a range of tools to assist in identifying proper site selection based on wind, rates and rebates.

www.windknowledge.com

Easy look up of US and Canada wind rates, electrical rates, rebates and incentives.

www.windestimator.com

Global wind statistic, predominant wind direction and wind strength analysis.

Award Winning Technology



Edison Awards Gold Winner in the Energy & Sustainability category



One of the Most Brilliant Products of 2009 by Popular Mechanics Magazine



2009 UNIDO Top Ten New Technologies for Renewable Energy Utilization




Built like no other - Automated assembly lines.

Product Certification

ETL listed, conforming to UL 1741 and CAN/CSA C22.2 No.107.1.


Connection Options

Connect to Building/House, Utility or 12/24/48V Batteries
Converts your wind – like no other.

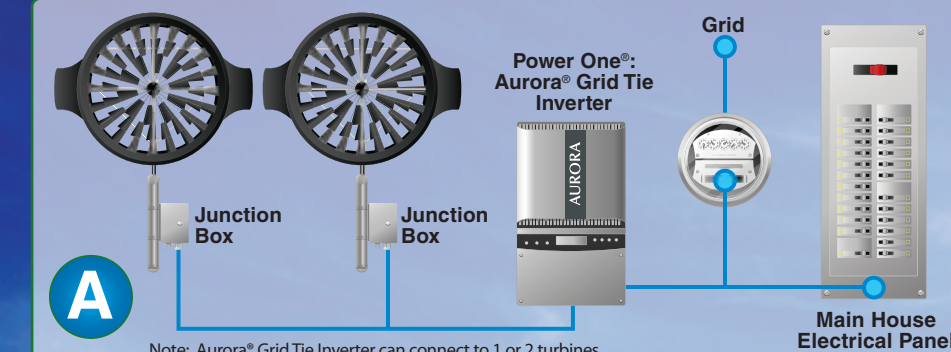


Note: Aurora® Grid Tie Inverter can connect to 1 or 2 turbines.


Grid Tie easy connection to utility - up to 2 turbines per Aurora® Inverter, no batteries required

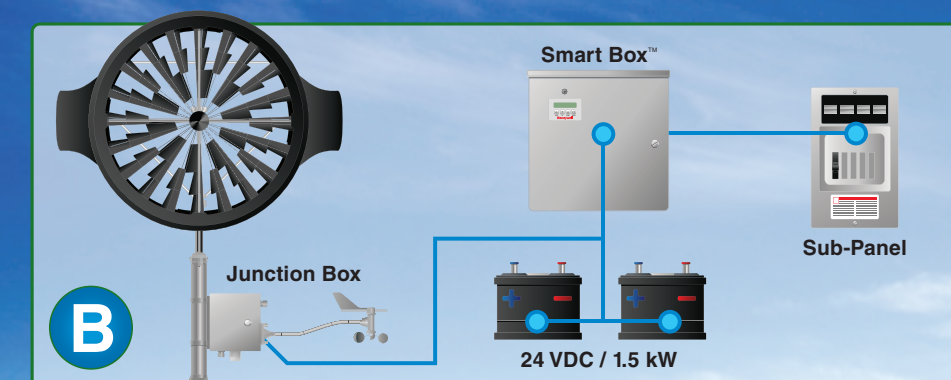

Non-Grid Tie connects to the building subpanel

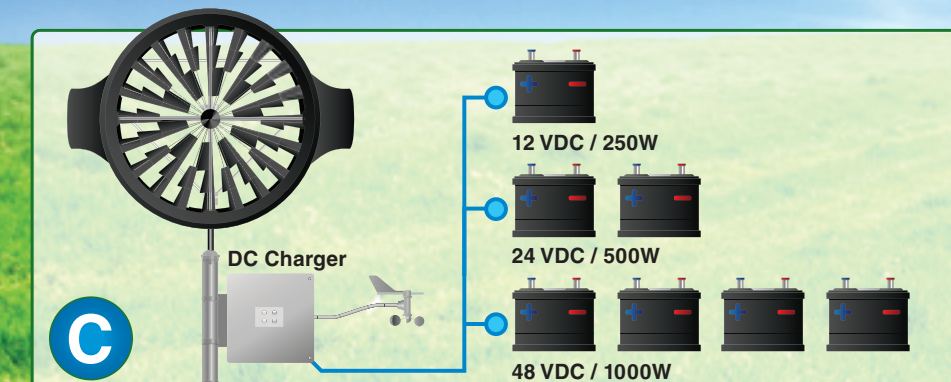

Direct DC 12/24/48 V battery charging

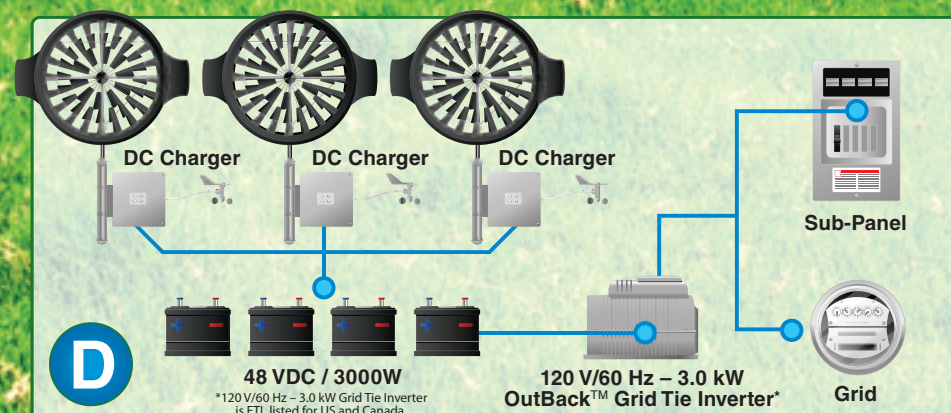

Grid Tie utility connection - up to 3 turbines per OutBack™ Inverter, operational during power failure