
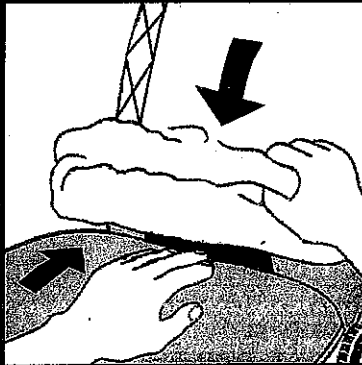


# COVERALLS®


www.seatsinc.com

Place the seat cover over the back of seat and pull down. Make sure the front panel is square on the front of the seat.


\*Seat with armrest(s): Lift armrest(s) to "UP" position. While pulling seat cover down, weave armrest(s) under drawstrings and back out again at top of seat cover's armrest opening (E\*) identified in drawing.

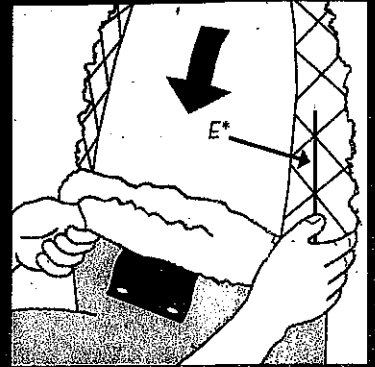


2. Push the center strap through the middle of the seat, enabling it to be pulled through from behind.

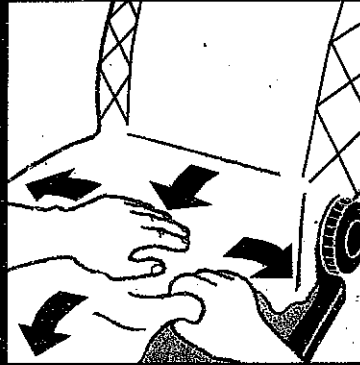


3. Pull the seat cover forward and neatly position the front and side panels down the base of the seat.

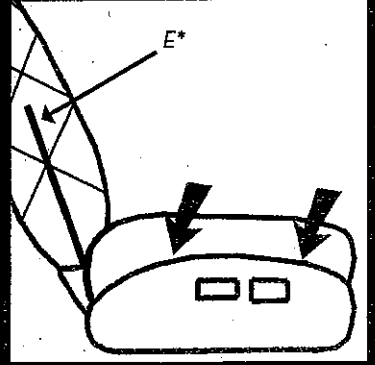


4. For seats with side plastic moldings it is preferable to position the seat cover between the molding and the seat thereby allowing access to any seat controls.

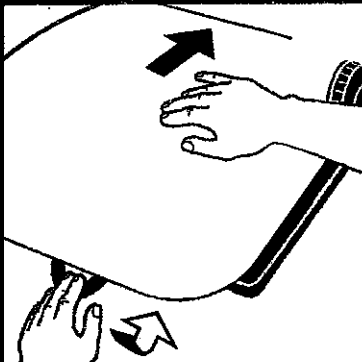

5. Smooth out the seat cover and pull the front tie(s) under the seat. Ensure the center back seam is straight. The seat cover will mold to the shape of the seat after a few uses.

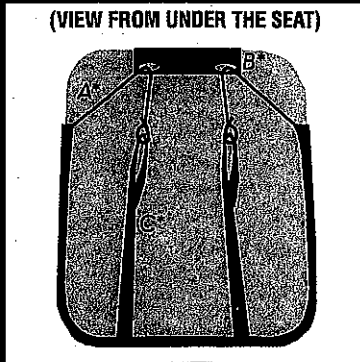

6. Make sure all straps are in position and not interfering with the seat running tracks or other seats controls. Clip together and pull for tension. Tighten side cord as required.

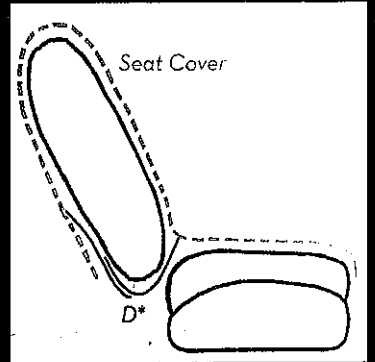

7. Fasten the velcro backrest strap (D\*). This is best completed when the seat is fully extended.

A\* = Elastic Draw String B\* = Center Strap (from Step 2) C\* = Velcro Tab (folded back onto material straps)  
D\* = Velcro Backrest Strap E\* = Armrest Opening