

Model
TRM20-XL


SIPHON HAND PUMP

FLEXIBLE & HIGH SPEED

INSTRUCTIONS AND PRECAUTIONS



SAVE THESE INSTRUCTIONS.
READ ALL PRECAUTIONS AND INSTRUCTIONS.

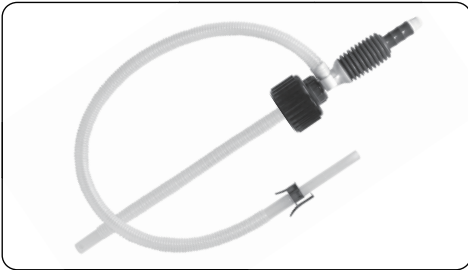

TIERA
PUMP

terapump.net


1941 E OCCIDENTAL ST
SANTA ANA, CA 92705

terapump@gmail.com
1-877-251-2288

SPECIFICATIONS

Specifications	Delivery volume : About 12LPM(3.2GPM) Main Material : PE
Applicable Liquids	Gasoline, Kerosene, Diesel, Non-potable water, Deodorants, Antifreeze, Windshield washer fluid, Thinner, Toluene, Chemical insecticides, Agricultural Chemicals, Motor oil(Ex.5W30), Hydraulic oil(Ex.AW46), Lubricants

OPERATING INSTRUCTIONS

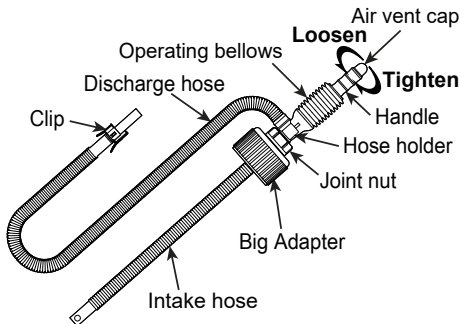

1. Straighten Intake hose.
2. Fasten Big adapter to your supply tank.
3. Insert Intake hose (non-flexible) and fasten tightly with Joint nut.
4. Insert Discharge hose (flexible) into the receiving container and hold with Clip.

5. Tighten Air vent cap by turning it clockwise.
6. Move Operating bellows up and down to start flow. Automatic siphon action will continue as long as liquid level in sending container is higher than Discharge hose end.
7. In order to stop liquid flow, loosen Air vent cap by turning it counter-clockwise, and gently lift Discharge hose to allow any remaining liquid to drain.
8. After use, keep the Discharge hose end in the Hose holder.

CAUTION

1. Do not use for transferring Acetone, Benzene, Creosol, Ethyl, Phenol, Concentrated Caustic soda liquid, Nitric acid, Hydrochloric acid, Sulfuric acid, Toluene, etc.
2. Do not refuel directly while the vehicle or other equipment is turned on.
3. Do not leave unattended during use.

Made in Korea