
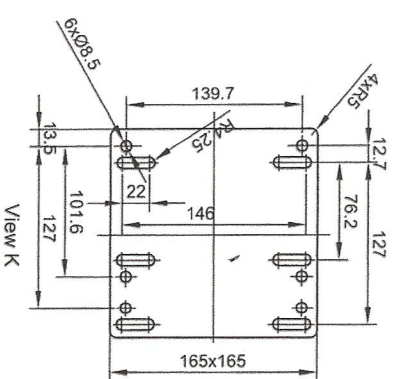
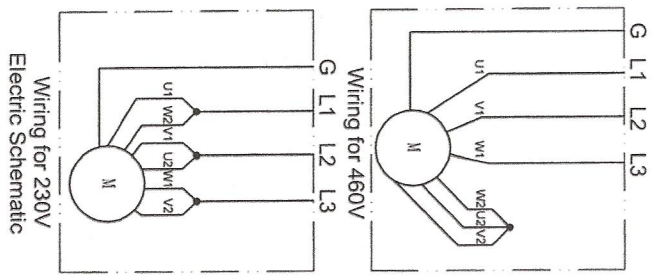
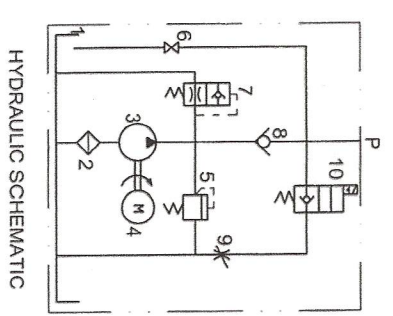


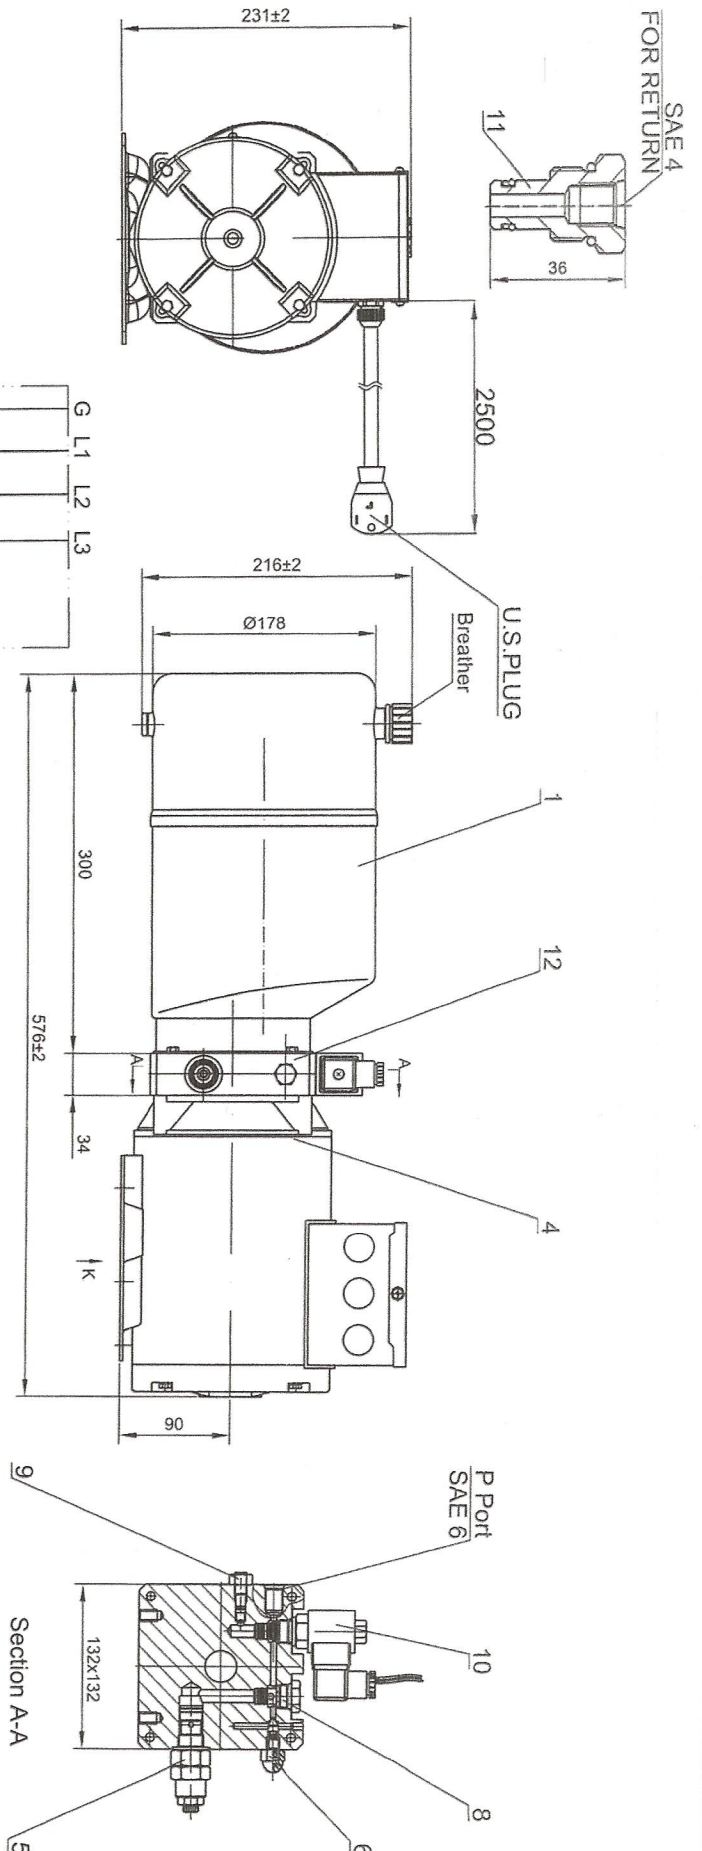

Note: The motor is prewired to 230V when shipping.

12	Central Manifold	LBZ-G2KK-1	Aluminium
11	PLUG	YBZ1-PG08S	Ship loose in the box
10	Solenoid Valve	LSV2-08-2NCP-2H	#8 24 VDC Coil with Hirschmann Connector
9	Throttle Valve	YBZ-E2D31/1-11	Flow Control
8	Check Valve	DF08-01-00	MAX. Pressure 4500PSI
7	Buffer Valve	HCF-Z1/4	MIN. Flow 0.7L/min
6	Needle Valve	YBZ-E3D312/1-02	For Manual Release
5	System Relief Valve	YBZ-E2D31/1-04B	2900PSI
4	Motor	AM63-7FAK-3BA2R	230/460V, 3PH, 1.1kW, 1750RPM, 60HZ, S3
3	Gear Pump	CBKA-F1.2F	1.2cc/r
2	Suction Filter	YBZ-4-100	150µm
1	Tank	YBZ-TRYX-6L-N	Steel, 6L
No.	Description	P/N	Technical data

Designed by _____ Checked by _____ Reviewed by _____ Approved by _____

2020.3.17
P/N: YBZ5-F1.2B7F2AKABT1
Item# 53458
Rev.: B

BUCHER Bucher Hydraulics (Wuxi) Co., Ltd.
www.wx-di.com tech@wx-di.com