


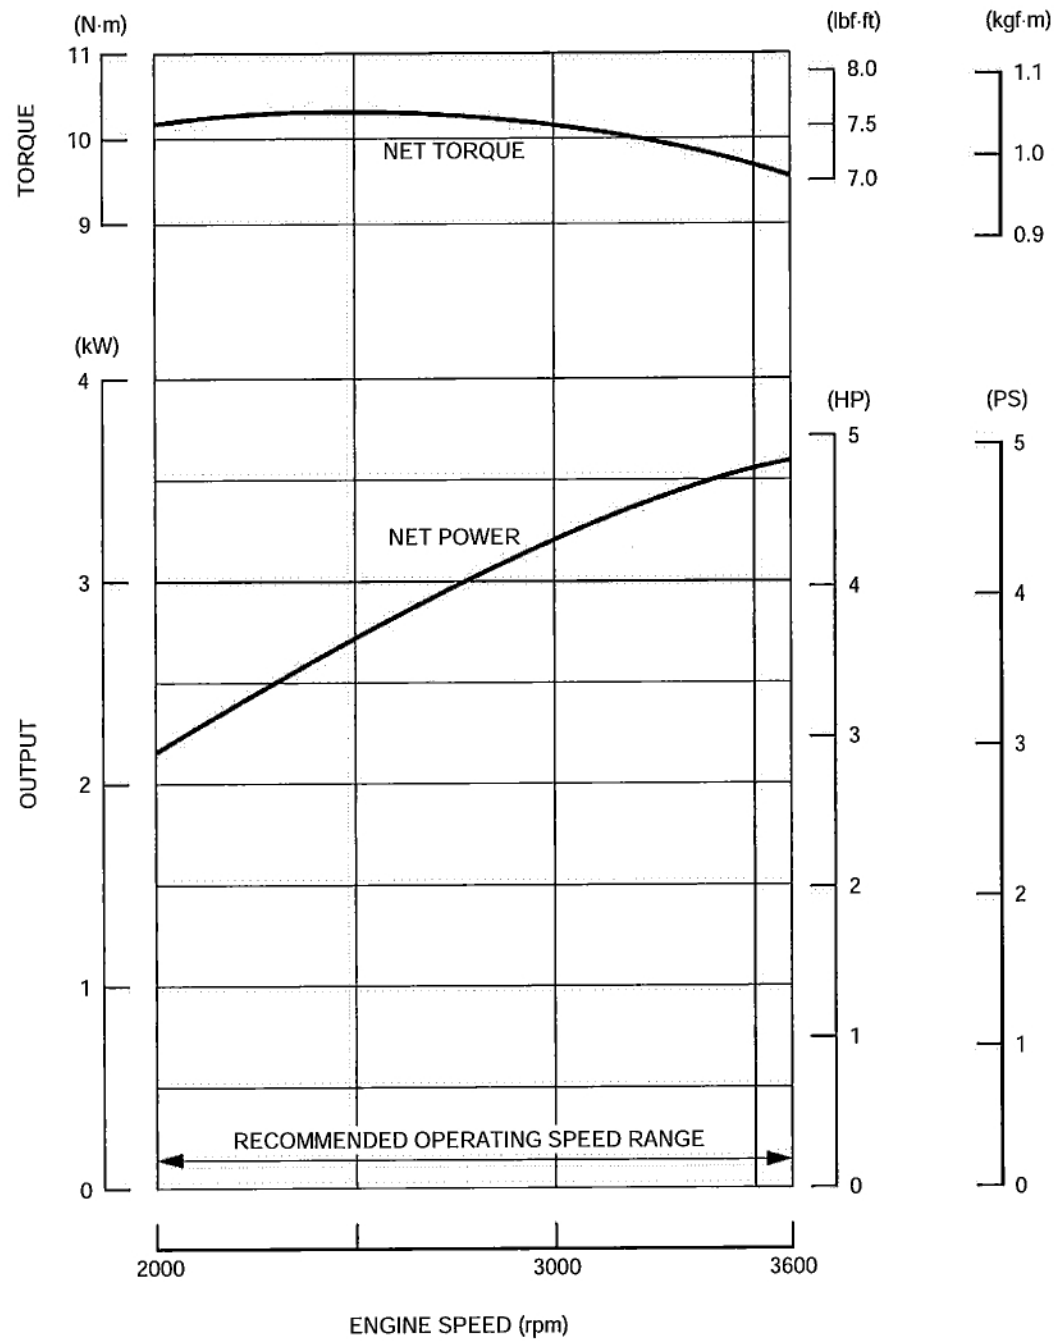


GX160UT2

SPECIFICATIONS

GX160 (WITHOUT REDUCTION)

Unit: mm (in)

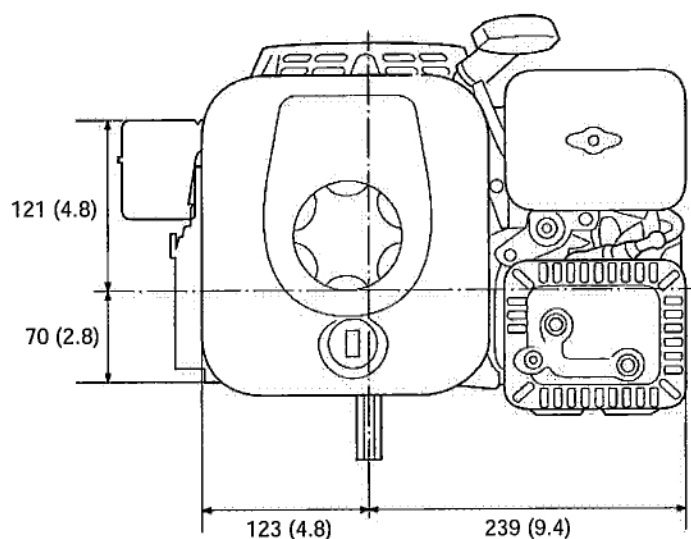

Dual/dual silent: 160 (6.3)

Cyclone: 168 (6.6)


Oil bath: 159 (6.3)

Semi dry: 156 (6.1)

Dual/dual silent: 337 (13.3)

Cyclone/Oil bath/Semi dry:

333 (13.1)

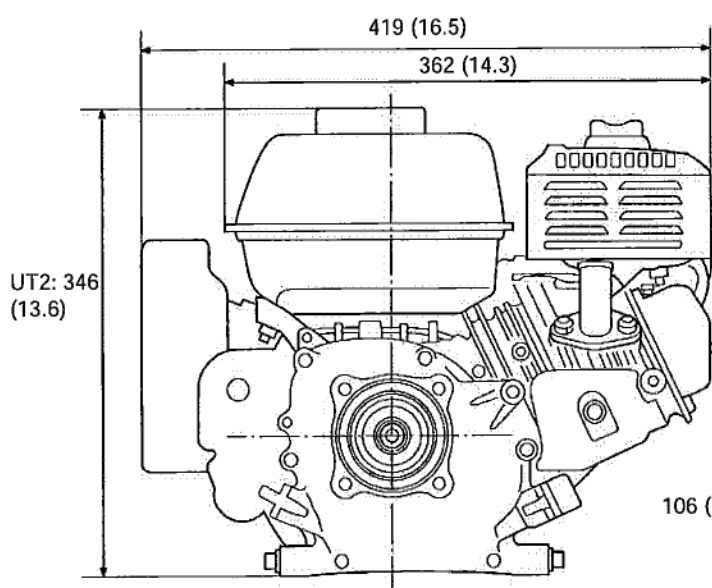


Standard: 93 (3.7)

Silent: 106 (4.2)

106 (4.2)

S type*: 75.5 (2.97)

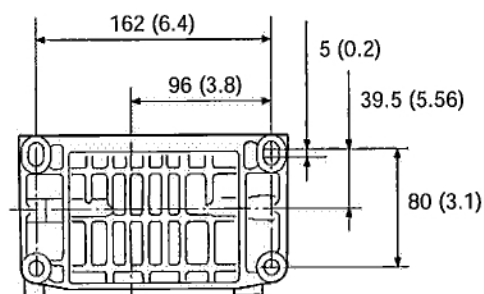

Q type*: 312.5 (12.30)

S type*: 304 (12.0)

T type*: 312.5 (12.30)


V type*: 322.5 (12.70)

SPECIFICATIONS

GX160 (WITH REDUCTION)

GX160UT2

Unit: mm (in)



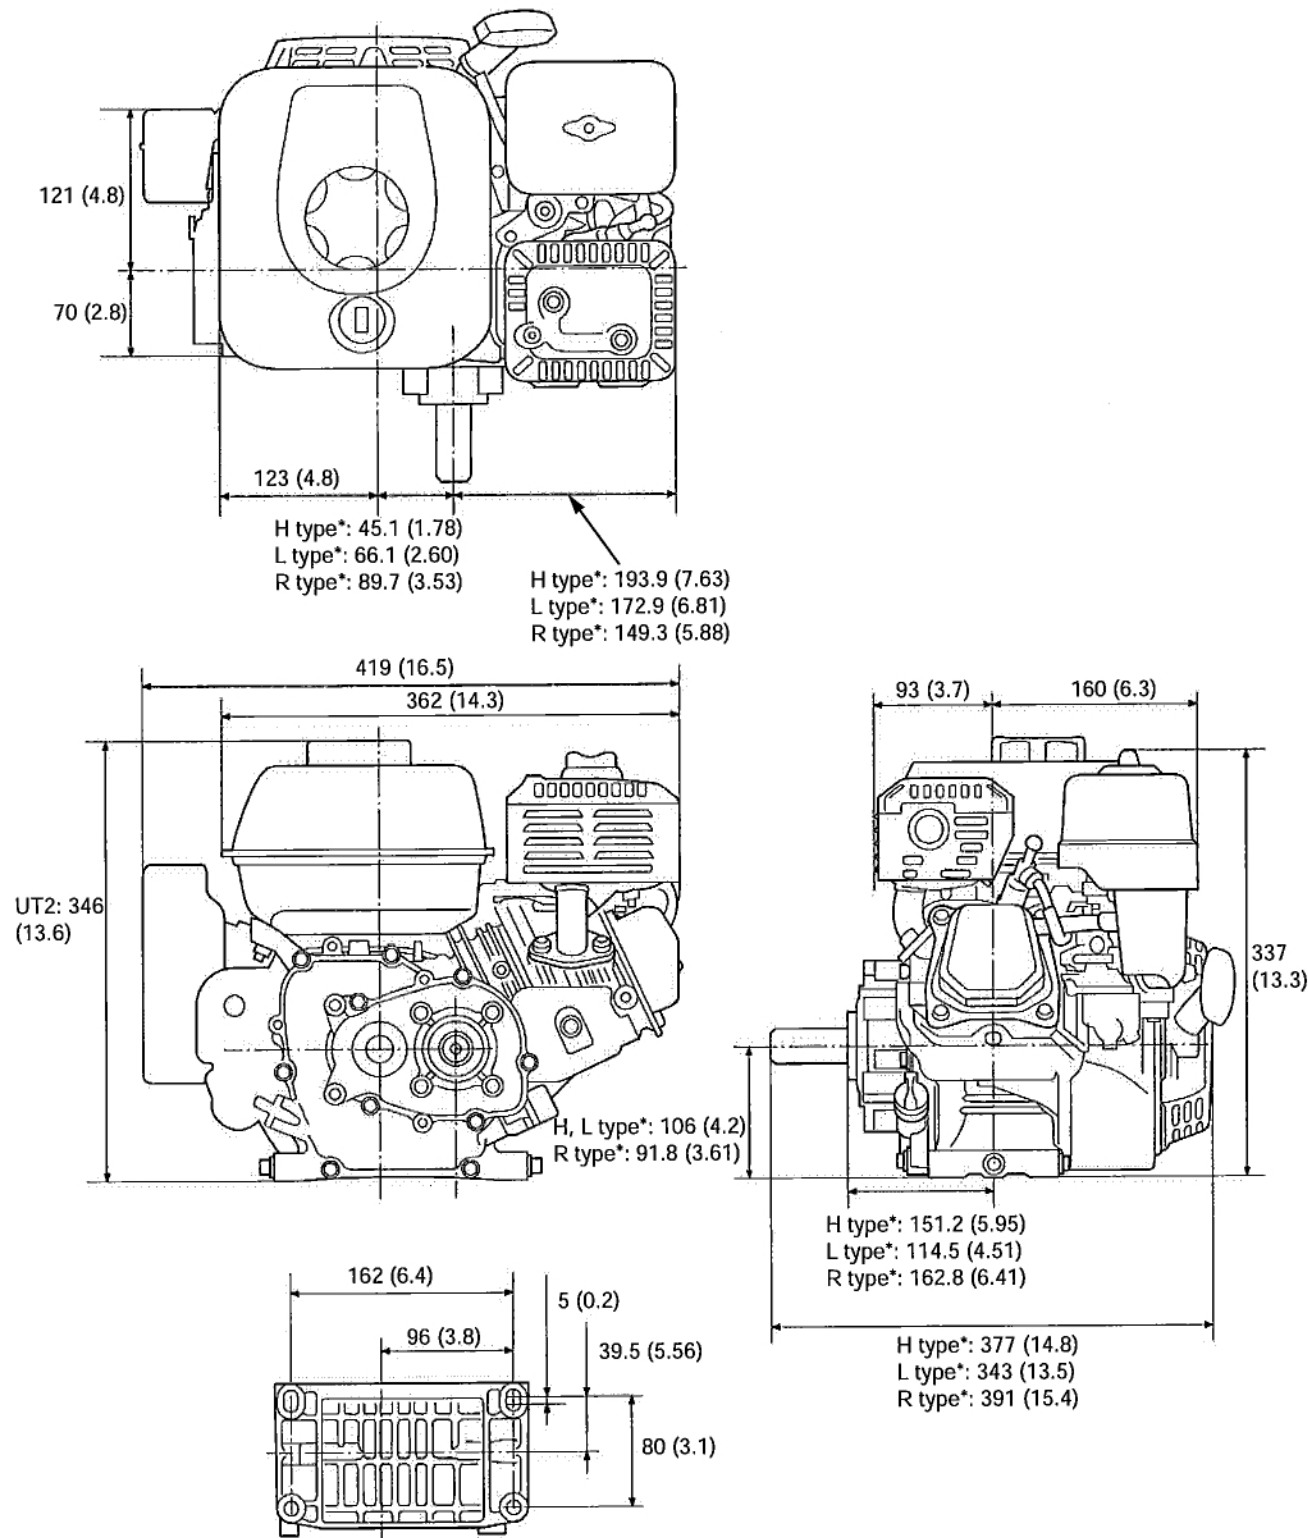


P.T.O. DIMENSIONAL DRAWINGS

*: P.T.O. type.

WITHOUT REDUCTION

Unit: mm (in)

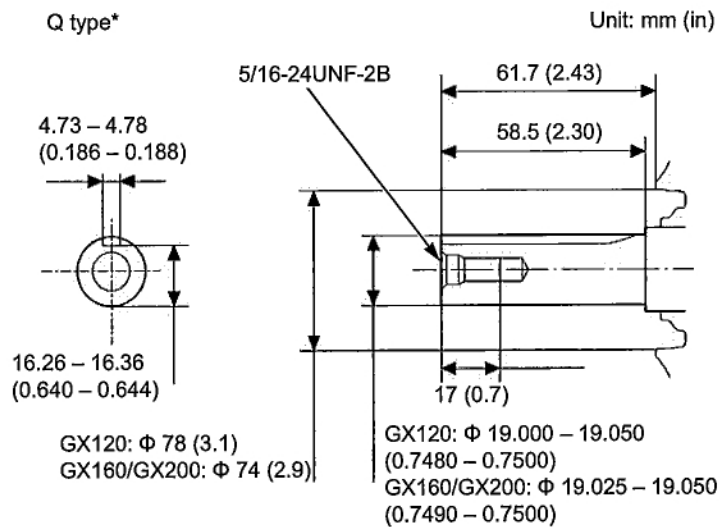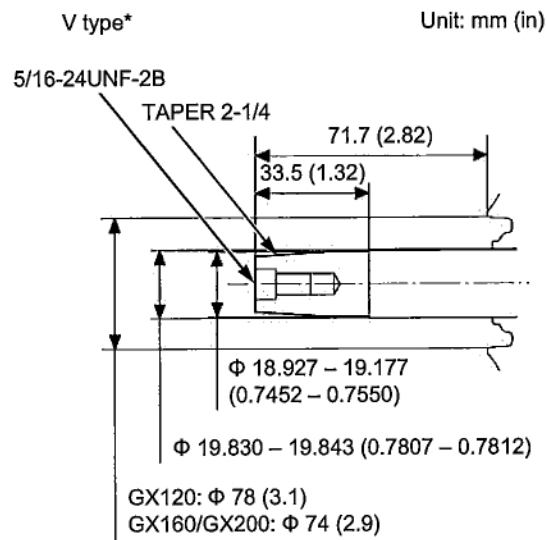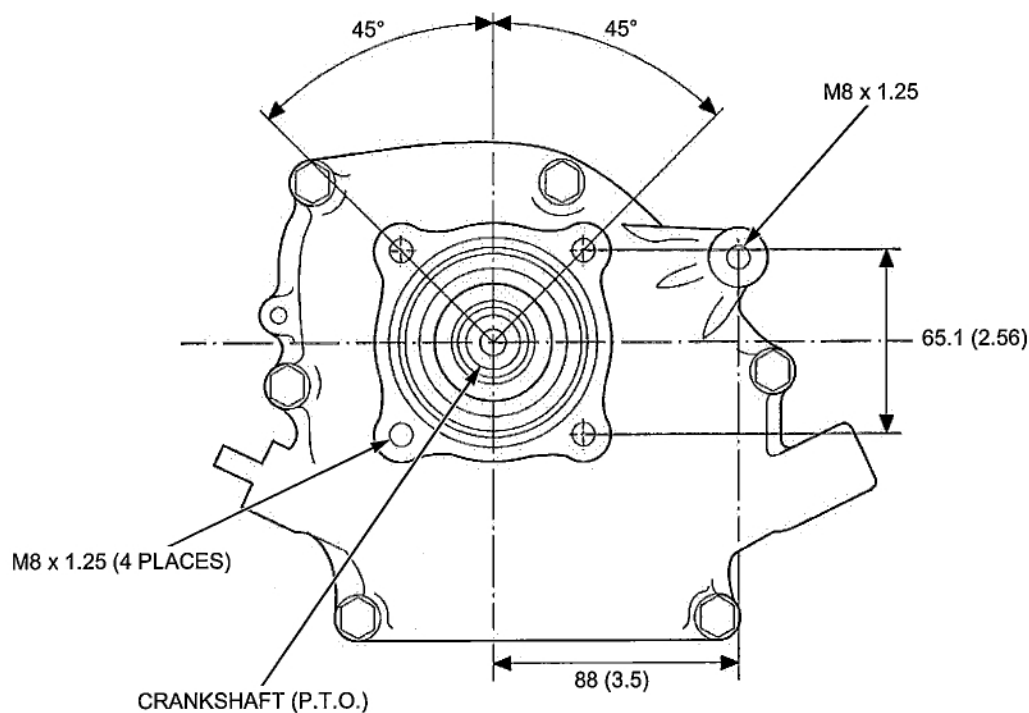

SPECIFICATIONS


GX160UT2

S type*

Unit: mm (in)

T type*


Unit: mm (in)

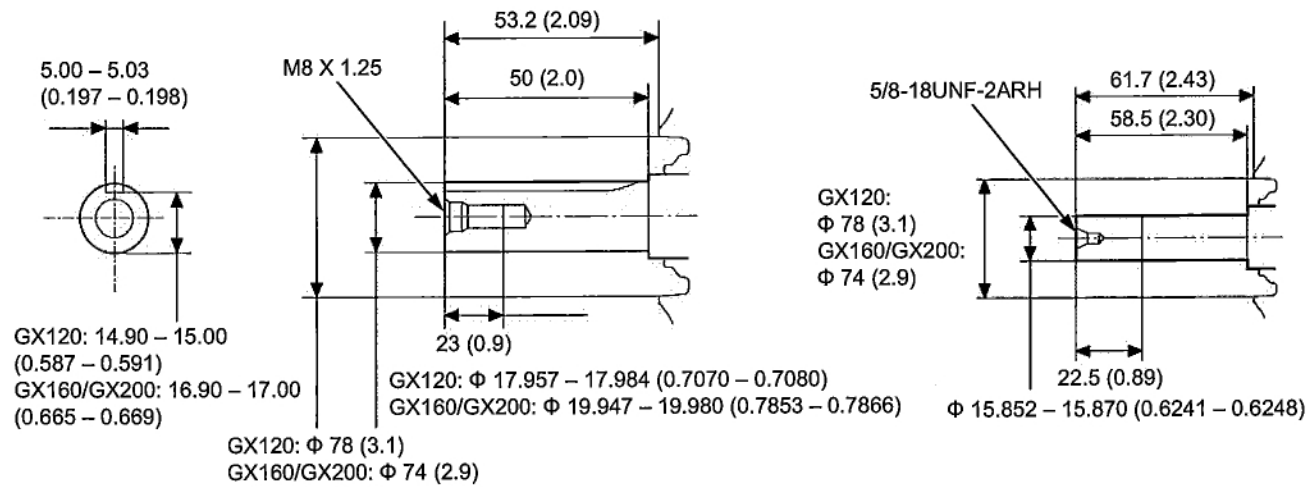

WITH REDUCTION


H type*

Unit: mm (in)

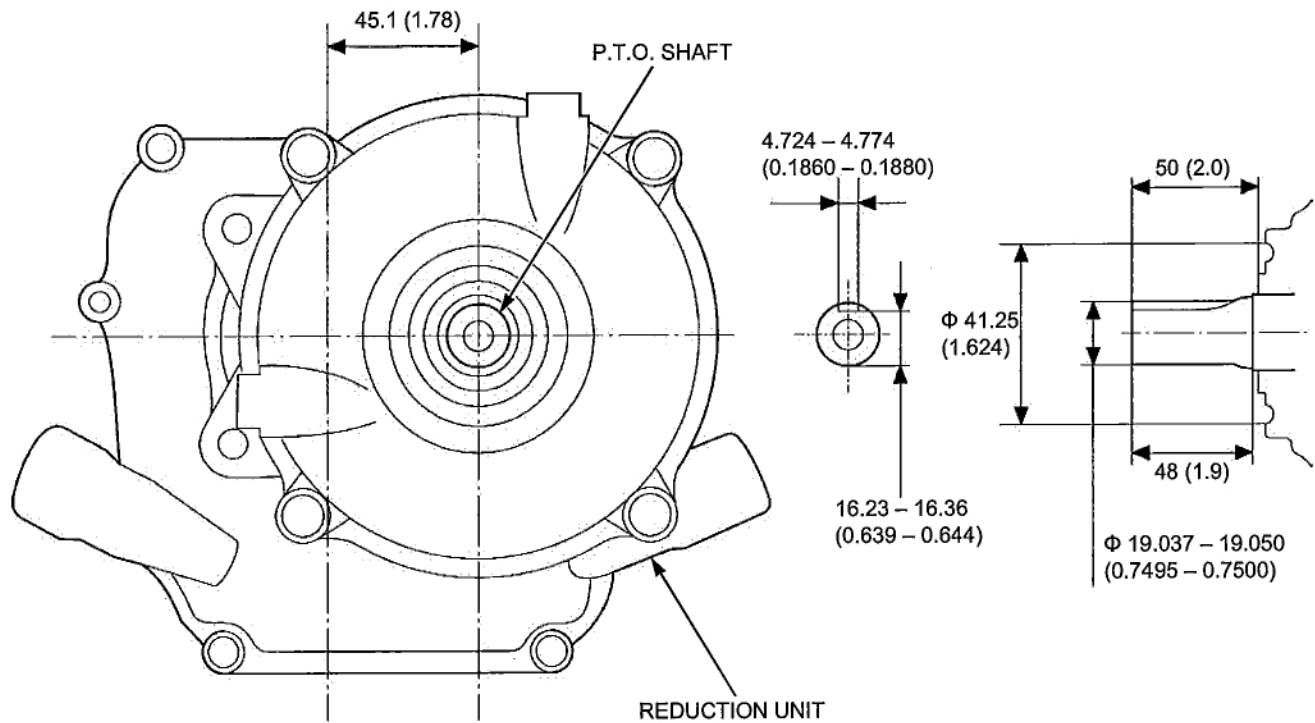

L type*

Unit: mm (in)

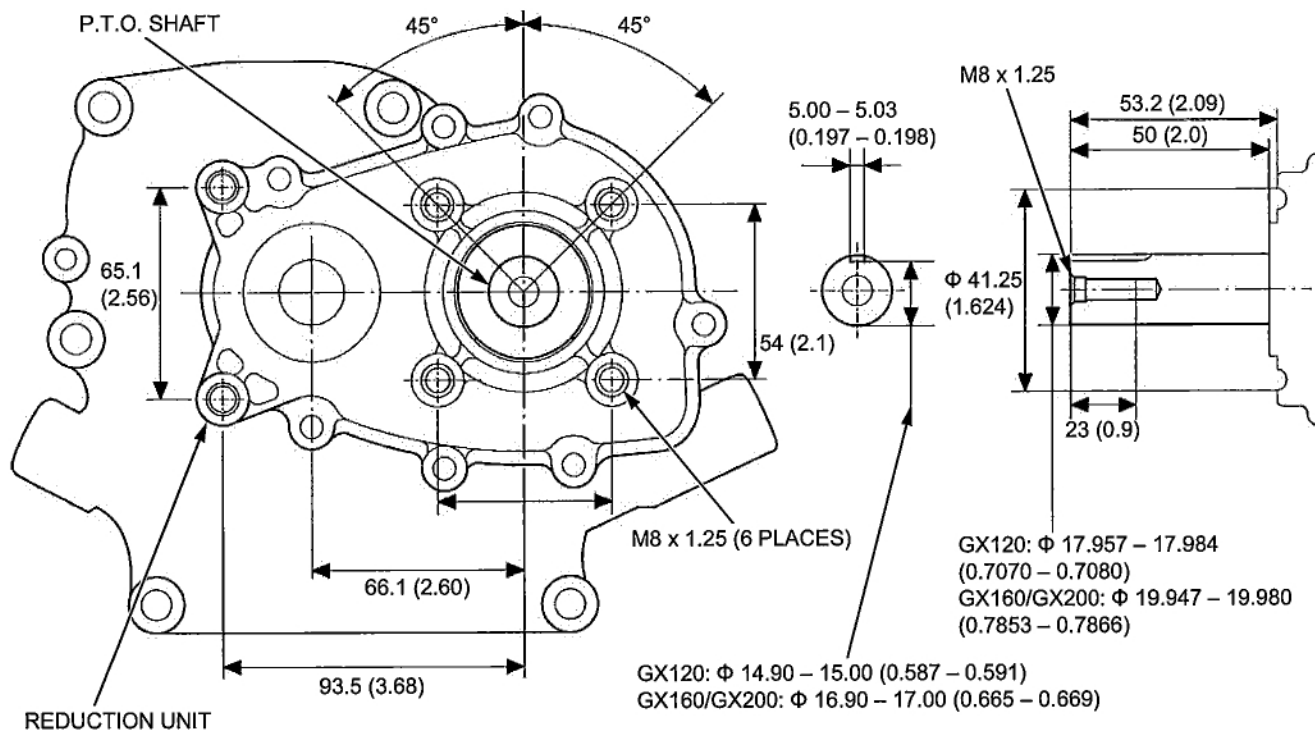

SPECIFICATIONS

GX160UT2

R type*

Unit: mm (in)

