

Owner's Manual

TrenchBadger[®] PRO series

Trencher Attachment



Please read the operator's manual carefully and make sure you understand the instructions before using the machine.

CONTENTS

CONTENTS	2	Assembly of Blades	10
INTRODUCTION	3	OPERATION	11
Dear customer,	3	STARTING THE ENGINE.....	11
SAFETY AWARENESS.....	4	STOPPING THE ENGINE	11
A FEW WORDS ABOUT SAFETY.....	4	GENERAL WORKING INSTRUCTIONS	12
SYMBOLS.....	4	Preparation for Trench/Bed Cutting	12
THE OPERATOR'S MANUAL.....	5	Safety Harness Adjustment	12
ENVIRONMENTAL AND OPERATIONAL		Basic Safety Rules	12
WARNINGS.....	5	Check Before Starting	12
IMPORTANT MESSAGE TO EMPLOYERS	6	WORKING TECHNIQUES	13
STATE AND LOCAL REQUIREMENTS	6	Trenching.....	13
GENERAL SAFETY PRECAUTIONS	6	Bed Cutting	13
OPERATIONAL SAFETY.....	7	MAINTENANCE	14
Kickout.....	7	The Importance of Maintenance	14
Maintaining Control.....	7	ENGINE AND DRIVE	14
First Aid Kit.....	7	GEARBOX	14
Machine Safety Equipment.....	7	Gearbox Lubricant.....	14
Trenching Deflector	8	DEFLECTORS.....	14
Harness Strap.....	8	CONTINUAL MAINTENANCE.....	14
ASSEMBLY.....	9	TROUBLESHOOTING	15
PRODUCT AND COMPONENT VIEWS.....	9	MAINTENANCE SCHEDULE	16
PRODUCT ASSEMBLY.....	10	STORAGE	16
Assembly of the Pole Shield.....	10	TECHNICAL DATA.....	16
Assembly of the Gearbox.....	10		
Assembly of the Front Deflector	10		

INTRODUCTION

Dear customer,

Congratulations on your selected TrenchBadger product! We are certain you will be pleased with your purchase of one of the finest handheld trenchers/bed cutters on the market.

TrenchBadger is the first to bring a hand held, stand-up ergonomic trencher/bed cutter to the outdoor power equipment consumers for both the lawn and garden and building and construction industry, with safety and quality as our highest priority.

We are convinced that you will appreciate the quality and performance of our product for many projects to come. The purchase of one of our products gives you access to professional help for operational guidance and repair and service whenever this may be necessary.

We want to help you get the best results from your new trencher/bed cutter and to operate it safely. This manual contains the information on how to do that - please read it carefully. Think of this operator's manual as a valuable document. By following its' content (assembly, environmental awareness, operation, maintenance, etc.) the life span and the second-hand value of the machine can be extended. If you lend, rent or sell this machine, make sure that the new operator receives the owner's manual.

Thank you for using a TrenchBadger product.

TrenchBadger has a policy of continuous development and product improvement and therefore reserves the right to modify the design and appearance of products without prior notice.

Best Wishes,

TrenchBadger, Inc.

SAFETY AWARENESS

A FEW WORDS ABOUT SAFETY

Your safety, and the safety of others, is very important. And using this trencher/bed cutter safely is an important responsibility.

To help you make informed decisions about safety, we have provided operating procedures and other information on labels and in this manual. This information alerts you to potential hazards that could hurt you or others.

Of course, it is not practical or possible to warn you about all the hazards associated with operating or maintaining a trencher/bed cutter. You must use your own good judgment.

You will find important safety information in a variety of forms, including:




- **Safety Labels**—on the trencher/bed cutter.
- **Safety Messages**—preceded by a safety alert symbol and one of three signal words: DANGER, WARNING, or CAUTION.
- **Safety Headings**—such as IMPORTANT SAFETY INFORMATION.
- **Safety Section**—such as TRENCHER SAFETY.
- **Instructions**—how to use this trencher/bed cutter correctly and safely.

This entire book is filled with important safety information—please read it carefully!

Note: Illustrations and specifications in this manual may vary according to Country requirements and are subject to change without notice by the manufacturer.

SYMBOLS

These signal words mean the following, if you don't follow instructions:

 DANGER	You WILL be KILLED or SERIOUSLY HURT
 WARNING	You CAN be KILLED or SERIOUSLY HURT
 CAUTION	You CAN be HURT



Your manual contains special messages to bring attention to potential safety concerns, machine damage as well as helpful operating and servicing information. **PLEASE READ ALL THE INFORMATION CAREFULLY TO AVOID INJURY AND MACHINE DAMAGE.**



When operating this equipment, always wear:

- A protective helmet where there is a risk of falling objects
- Approved hearing protection
- Approved eye protection



Wear non-slip, heavy-duty protective gloves when operating and handling the blades.



Wear safety shoes or boots having skid-proof sole and anti-piercing / steel toed inserts.



Watch out for thrown objects and ricochets.



The operator of the machine must ensure, while working, that no persons or animals come closer than 50ft (15m).

Kickback - Machine can be thrown violently up or to the side when the blade comes into contact with a fixed object. The blade is capable of amputating an arm or leg. Always keep people and animals at least 50ft (15m) from the machine.

SAFETY AWARENESS

THE OPERATOR'S MANUAL

Your operator's manual is for your protection. READ IT. Keep it in a safe place for reference. Know what you are doing before you begin assembly of the unit. Proper preparation and upkeep go hand-in-hand with satisfactory performance of the trencher/bed cutter and safety.

Contact your dealer or the distributor for your area if you do not understand any of the instructions in this manual. In addition to the operating instructions, this manual contains paragraphs that require your special attention.

ENVIRONMENTAL AND OPERATIONAL WARNINGS



WARNING: To ensure safe and correct operation of the trencher/bed cutter, this operator's manual should always be kept with or near machine.



WARNING: Allow only persons who understand this manual and have had proper training to operate your trencher/bed cutter.



WARNING: A trencher/bed cutter can be dangerous if used incorrectly or carelessly, and can cause serious or fatal injury to the operator or others. It is extremely important that you read and understand the contents of this operator's manual.



WARNING: Under no circumstances may the design of the machine be modified without the permission of the manufacturer. Always use genuine accessories. Non-authorized modifications and/or accessories can result in serious personal injury or the death of the operator or others.



WARNING: Some engine ignition system produce an electromagnetic field of a very low intensity. This field may interfere with some pacemakers. To reduce the risk of serious or fatal injury, persons with pacemaker should consult their physician and the pacemaker manufacturer before operating this tool.



WARNING: Muffler surfaces are very hot during and after operation of the trencher/bed cutter, keep all body parts away from the muffler. Serious burns may occur if contact is made with the muffler.



WARNING: Long-term exposure to noise can result in permanent hearing impairment. So always use approved hearing protection.



WARNING: Exposure to vibrations through prolonged use of gasoline powered hand tools could cause blood vessel or nerve damage in the fingers, hands, and wrists of people prone to circulation disorders or abnormal swellings. Prolonged use in cold weather has been linked to blood vessel damage in otherwise healthy people. If symptoms occur such as numbness, pain, loss of strength, change in skin color or texture, or loss of feeling in the fingers, hands, or wrists, discontinue the use of this tool and seek medical attention.

SAFETY AWARENESS

IMPORTANT MESSAGE TO EMPLOYERS

As an employer, you have a special responsibility to the people who work for you. Before you ask anyone to operate this trencher/bed cutter, you need to determine whether the operator is capable and strong enough to safely handle and control the trencher/bed cutter.

If you decide he/she is, make sure the employee(s) read and understand all instructions and warnings in this manual and on the labels before operating the trencher/bed cutter.

Allow adequate time for hands-on training by a qualified instructor, and personally supervise practice sessions, until you feel sure the employee is ready to operate the trencher/bed cutter. Also, be sure employees wear proper clothing, eye and hearing protection, and any other gear that may be required by local ordinances or your insurance company.

Remember, too, that you are responsible for keeping the trencher/bed cutter properly maintained and in safe operating condition. Your commitment to safety on the job can help prevent accidents and result in longer and more productive years of service.

STATE AND LOCAL REQUIREMENTS

Consult and follow your state and local requirements (noise, emissions, etc.) as pertains to outdoor power equipment and their use.

GENERAL SAFETY PRECAUTIONS

- Do not handle or operate a trencher/bed cutter when you are fatigued, ill, or upset, or if you have taken alcohol, drugs, or medication. You must be in good physical condition and mentally alert. Trencher/bed cutter work is strenuous. If you have any condition that might be aggravated by strenuous work, check with your doctor before operating a trencher/bed cutter. Be more cautious before rest periods and towards the end of your shift.
- Major cases of trencher/bed cutter accidents happen when the blade or thrown objects hits the operator. While working with the trencher/bed cutter, always use safety protective approved clothing. The use of protective clothing does not eliminate injury risks, but reduces the injury effects in case of accident. Consult your trusted clothing supplier to choose equipment in compliance with legislation. The clothing must be proper and not an obstacle. Wear adherent protective clothing. Protective jackets and dungarees leggings are

ideal. Do not wear loose clothing, scarves, ties or bracelets. Tie up and protect long hair (example with foulards, cap, helmets, etc.). Safety boots having skidproof sole and anti-piercing insert. Wear protective goggles or face screens. Use protections against noises: for example, noise reduction ear guards or earplugs. The use of protections for the ear requires much more attention and caution, because the perception of audible warning signals (screaming, alarms, etc.) is limited. Always remove your hearing protection as soon as the engine stops. Wear gloves that permit the maximum absorption of vibrations.

- Check the trencher/bed cutter each day to ensure that each device, whether for safety or otherwise, is functional.
- Never use a damaged, modified, or improperly repaired or assembled trencher/bed cutter. Do not remove damage or deactivate any of the safety devices. Always replace cutting tools or safety devices immediately if it becomes damaged, broken or is otherwise removed.
- Carefully plan your operation in advance. Do not begin cutting until you have a clear work area, secure footing, and a planned retreat path.
- The trencher/bed cutter must only be used for trenching to appropriate depths or bed edging. It is inadvisable to perform other types of uses.

SAFETY AWARENESS

Kickout

Recognize that kickout can happen. With a basic understanding of kickout, you can reduce the element of surprise which contributes to accidents.

OPERATIONAL SAFETY



WARNING: Always hold the trencher/bed cutter with both hands when the engine is running. Use a firm grip with thumbs and fingers encircling the trencher/bed cutter handles.

- Keep all parts of your body away from the cutting attachment when the engine is running.
- Always carry the trencher/bed cutter with the engine stopped and the muffler away from your body. When transporting your trencher/bed cutter, carry from appropriate handles. When transporting in a vehicle, keep blades covered. Properly secure your trencher/bed cutter to prevent turnover, fuel spillage and damage.
- **Do not operate a trencher/bed cutter with one hand!** Serious injury to the operator, helpers, bystanders, or any combination of these persons may result from one-handed operation. **A trencher/bed cutter is intended for two-handed use.**
- Shut off the engine before setting down the trencher/bed cutter. Do not leave the engine running unattended.
- Only use the trencher/bed cutter in well-ventilated places, do not operate the trencher/bed cutter in explosive or flammable atmospheres or in closed environments. Beware of carbon monoxide poisoning.
- Always cut from a firm-footed and safe position on the ground.



WARNING: Take great care when working on sloping ground.

- Do not cut near electric cables.



WARNING: Call you local utilities before you dig. Find the local 811 call center in the U.S.

- Keep the handles dry, clean, and free of oil or fuel mixture.
- Never cut with the trencher/bed cutter above ground level.
- Never use the trencher/bed cutter without blade deflector.



WARNING: Avoid kickout which can result in serious injury. Kickout is the sideward, or sudden forward motion of the machine occurring when the blade contacts any object such as a log or stone, or when the wood closes in and pinches the saw blade in the cut. Contacting a foreign object can also result in loss of trencher control.

Maintaining Control

- Keep a good, firm grip on the trencher with both hands when the engine is running and don't let go. A firm grip will help you reduce kickout and maintain control of the trencher. Keep your fingers encircling the handle.
- Stand with your weight evenly balanced on both feet.
- Do not overreach. You could be drawn or thrown off balance and lose control of the trencher.



WARNING: As a trencher/bed cutter user, do not solely rely on the product's safety features. You must follow all safety precautions, instructions, and maintenance in this manual to help avoid serious injury.

- Position of handle is important for safe operation. Adjust handle according to operator's height and trenching depth. The position of the hands with throttle and handle work together to give balance and resistance in controlling the machine.

First Aid Kit

Always have a first aid kit nearby.

Machine Safety Equipment

This section describes the machine's safety equipment, its purpose, and how checks and maintenance should be carried out to ensure that it operates correctly. See the Assembly section to locate where this equipment is positioned on your machine.

The life span of the machine can be reduced and the risk of accidents can increase if machine maintenance is not carried out correctly and if service and/or repairs are not carried out professionally. If you need further information please contact your nearest service workshop.



IMPORTANT! All servicing and repair work on the machine requires special training. This is especially true of the machine's safety equipment. If your machine fails any of the checks described below you must contact your service agent. When you buy any of our products we guarantee the availability of professional repairs and service. If the retailer who sells your machine is not a servicing dealer, ask him for the address of your nearest service agent.



WARNING: Never use a machine with faulty safety equipment. The machine's safety equipment must be checked and maintained as described in this section. If your machine fails any of these checks contact your service agent to get it repaired.

Trenching Deflector

This deflector is intended to prevent loose objects from being thrown towards the operator. The deflector also protects the operator from accidental contact with the cutting blades.

Check that the deflector is undamaged and not cracked. Replace the deflector if it has been exposed to impact or is cracked.



WARNING: Never use a cutting attachment without an approved deflector. If an incorrect or faulty deflector is fitted, this can cause serious personal injury.

Harness Strap

Your equipment comes with a Harness Strap that permits the trench/bed cutter to be properly balanced and at an appropriate height from the ground.

Check that the harness strap is correctly positioned over the far shoulder and across the chest to support the balanced weight of the machine.

ASSEMBLY

PRODUCT AND COMPONENT VIEWS

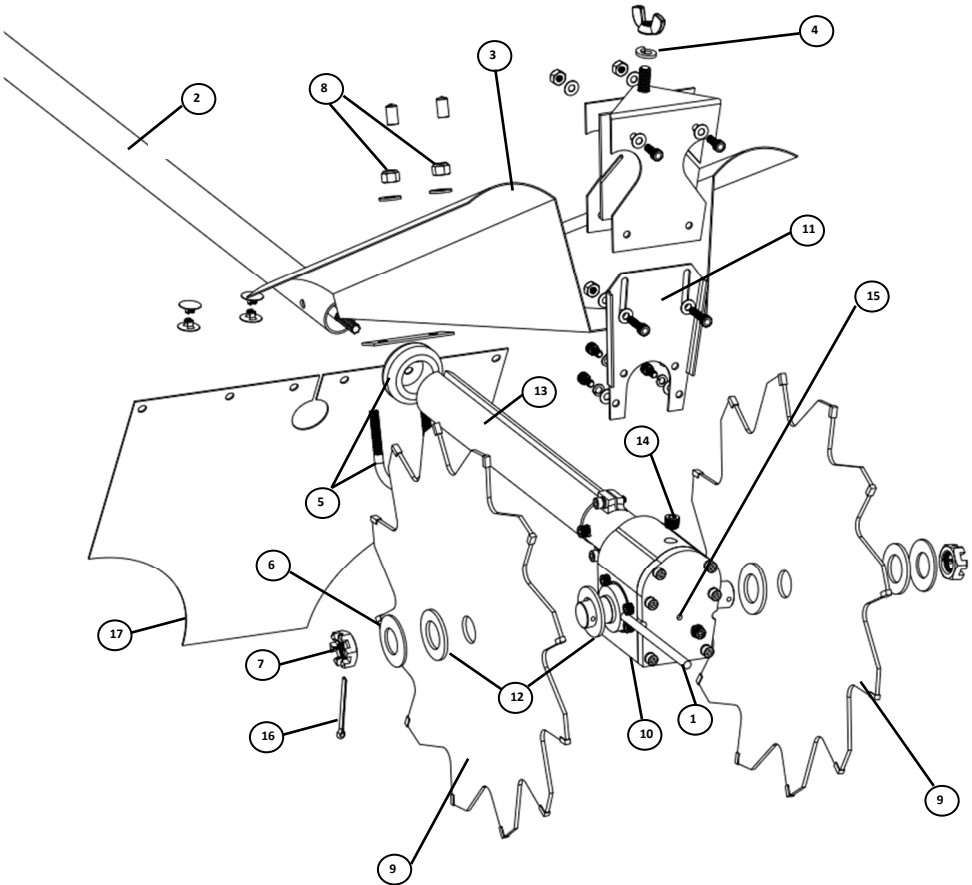


Figure 1 (some parts removed for clarity)

1. Supplied Tools	7. Blade Castle Nut (2x)	13. Pole Guard
2. Engine Pole	8. Nylon Lock Nut/Washer (2x)	14. Gearbox Fill Plug
3. Front 'Bikini' Deflector	9. V-Trench Blade	15. Gearbox Lub. Level Screw
4. Wing Nut and Lock Washer	10. Gearbox	16. Cotter Pin (2x)
5. U-Bolt/Grommet Assembly	11. Front Bridge Plate Assy	17. Rubber Flap
6. Blade Belleville Washer (2x)	12. Slip Disk (4x)	

ASSEMBLY

PRODUCT ASSEMBLY



WARNING: Always stop the engine before doing any work on the trench/bed cutter. The attachment continues to rotate even after the throttle has been released. Ensure that the cutting attachment has stopped completely and disconnect the HT lead from the spark plug before you start to work on it.



WARNING: After use the bevel gear may be very hot, always wear protective gloves when performing maintenance.

Assembly of the Pole Shield

Loosen the Front Deflector Screw and slide Pole Guard (13) onto Engine Pole (2) to desired height. Position and tighten.



WARNING: Never use machine without an approved safety deflector. If an incorrect or faulty deflector is fitted, this can cause serious personal injury.



WARNING: The deflector provided with your trench/bed cutter may not protect the operator from all foreign objects (gravel, glass, wire, etc) thrown by the rotating cutting attachment. Thrown objects may also ricochet and strike the operator.

Assembly of the Gearbox

Slide Gearbox (107) onto Engine Pole (2) until Drive Shaft is fully engaged into Gearbox. Confirm full engagement on Engine Pole.

With engine sitting flat to ground level, orient bottom of Gearbox flat to ground level. Install and tighten side Set Screws to torque (32 in-lbs) – **Set Screw to align with hole in Engine Pole.** Then tighten (2x) Pole Clamp screws on Gearbox evenly until to torque (32 in-lbs).

Assembly of the Front Deflector

Install Front Deflector (3) as shown (under Bridge Plate flange). Install U-Bolt/Grommet Assy/Plate (5). Insert center holes in Rubber Flap (17) through U-Bolt and on top of Plate. Overlay Deflector on Rubber Flap. Install Wing Nut/Lock Washer (4) and Nylon Lock Nut (8) and tighten.

Assembly of Blades

Tools required: Inside: Anti-rotation Lock Pin (1) (Tool); Outside: Torque Wrench; Side cutters

Remove and clean all debris/dirt on blade components and Gearbox before assembly/disassembly.

- 1) Rotate Blades/Output Shaft until Anti-rotation Arbor Hole aligns with Pin groove. Insert Anti-rotation Pin into either side to keep Shafts from rotating.
 - 2) Install 'inner' Slip Disc (12) on Output Shafts.
 - 3) Install Blades on respective sides where cutting teeth are facing forward/away from engine.
 - 4) Install 'outer' Slip Disc (12) against Blades.
 - 5) Install Blade Belleville Washer (6) (cup towards blade / Green side facing out)
 - 6) Install Castle Nut (7). By hand, thread on until it securely seats against Belleville Washer.
 - 7) Using a torque wrench, torque Castle Nut to 18-20ft-lbs and align slot in Castle Nut with closest hole in Output Shaft – DO NOT fully flatten Belleville Washer.
 - 8) Insert Cotter Pin (16) through slot/hole – do not bend tip over yet.
 - 9) With proper gloves, check for blade slippage by rotating Blade by hand. If Blade does NOT slip, remove Cotter Pin, and loosen Castle Nut by one slot. Reinsert Cotter Pin and Re-check for Blade slippage.
- Note: Damage will occur to Gearbox and Drivetrain if proper Blade slippage does NOT occur. Warranty will be void.**
- 10) Finish by splitting and bending long-end of Cotter Pin over Output Shaft. Snip short-end and bend toward Belleville Washer. Remove Anti-rotation Pin.



WARNING: Properly assemble the blade washers and apply proper torque to Blade Collar Nuts. Serious personal injury may result from the blades loosening during operation. If proper torque is not possible, discontinue use until the repair is made.



WARNING: Always discard a blade that is bent, twisted, cracked, broken or damaged in any other way. Never attempt to straighten a twisted blade so that it can be reused. Only use original blades of the specified type.



WARNING: Never touch or adjust the blade while the motor is running. The blade is very sharp; always wear protective gloves when performing maintenance.

OPERATION

SEE your OEM owner's manual for proper engine operation and safety protocols.

RECOMMENDED FUEL: Only use recommended fuel and oil to maintain warranty and safe operation of your engine.

BASIC OPERATOR TIPS

1. Wear non-slip gloves for maximum grip and protection.
2. Maintain a proper grip on the trencher/bed cutter whenever the engine is running. The fingers should encircle the handlebar and the thumb is wrapped under the handlebar.

STARTING THE ENGINE

Place the trencher on level ground and ensure that no objects or obstructions are in immediate vicinity which could come in contact with the cutting attachment.

1. Place the trencher/bed cutter on the ground in a stable position. Check that the blades are free.
2. If equipped, slowly push the priming bulb repeatedly until fuel can be seen in the clear plastic fuel return tube.
3. On a cold engine, move choke in the CLOSE position. (Leave open on a warm engine).



4. Pull the starter cord until engine attempts to start.
5. On a cold engine, Push the choke lever in OPEN position.
6. Pull the starter cord once again to start the engine.
7. Once the machine is started, let it warm up.

STOPPING THE ENGINE

Set the throttle lever to idle position and wait a few seconds to let the engine cool off.

Move/press the ignition switch to the STOP (O) position.



OPERATION

GENERAL WORKING INSTRUCTIONS



WARNING: This section describes the basic safety precautions for working with the trencher/bed cutter. If you encounter a situation where you are uncertain how to proceed, you should ask an expert. Contact your dealer or your service workshop. Avoid all usage which you consider to be beyond your capability. You must understand the difference between trenching and bed cutting before use.

Preparation for Trench/Bed Cutting



WARNING: The trencher/bed cutter is to be used at ground level with the cutting attachment perpendicular to the ground. Use above ground level or with the cutting attachment parallel to the ground may increase the risk of injury. Never use your trencher/bed cutter as a hedge/tree trimmer or outside its intended use.



WARNING: Neither the operator of the machine nor anyone else may attempt to remove cut material while the engine is running or the cutting equipment is rotating, as this can result in serious injury. Stop the engine and cutting equipment before you remove material that has wound around the blade/equipment as otherwise there is a risk of injury.

Safety Harness Adjustment

- Prior to operation, adjust and fit Safety Harness (provided by your OEM). Lift both trencher/ bed cutter and Safety Harness Strap. Slip Safety Harness over far shoulder and across chest. Adjust harness at buckle as to carry partial load of machine.
- Safety Harness should not interfere with Throttle Control or operational movement of machine.

Basic Safety Rules

1. Look around you:
 - To ensure that people, animals or other things cannot affect your control of the machine.
 - To ensure that people, animals, etc., do not come into contact with the cutting attachment or loose objects that are thrown out by the cutting attachment.

2. Do not use the machine in bad weather, such as dense fog, heavy rain, strong wind, intense cold, etc. Working in bad weather is tiring and often brings added risks, such as icy ground, unpredictable felling direction, etc.
3. Make sure you can move and stand safely. Check the area around you for possible obstacles (roots, rocks, branches, ditches, etc.) in case you have to move suddenly. Take great care when working on sloping ground.
4. Switch off the engine before moving to another area.
5. Never put the machine down with the engine running.
6. Always use the correct equipment.
7. Make sure the equipment is well adjusted.
8. Follow the safety precautions.
9. Organize your work carefully.
10. Always use full throttle when starting to cut with the blade.
11. Always use sharp blades.
12. Avoid large stones/rocks.

Check Before Starting

- Check the blades are free to rotate without binding to each other or gearbox.
- Check the blades to ensure that no cracks have formed at the bottom of the teeth or by the center hole. Discard a blade if cracks are found.
- Check that the blade washers are not cracked due to fatigue or due to being tightened too much. Discard the washer if it is cracked.
- Ensure the blade locking nuts have not lost their captive force or too loose.
- Check Deflector and Bikini for cracks and proper mounting.



WARNING: Always discard a blade that is bent, twisted, cracked, broken or damaged in any other way. Never attempt to straighten a twisted blade so that it can be reused. Only use original blades of the specified type.

WORKING TECHNIQUES



WARNING: Watch out for thrown objects. Always wear approved eye protection. Never lean over the cutting attachment guard. Stones, rubbish, etc. can be thrown up into the eyes causing blindness or serious injury. Stop the machine immediately if anyone approaches. Never swing the machine around without first checking behind you to make sure no-one is within the safety zone.

Trenching

- Once equipment is started and engine is at idle, lift both trencher/ bed cutter and Safety Harness. Slip Safety Harness over far shoulder and across chest. Confirm harness carry's partial load of machine.
- To begin trenching, start with the machine at full throttle and ease the blades into the soil until half the blade is in ground.
- Work systematically, forward, down, and backwards, trenching 3-5in of additional soil with each motion until depth is reached.
- Continue forward, down, and backwards trenching from bottom of trench depth to the top, excavating another segment of soil.
- With each forward and down trench, take a step backwards and pull trencher towards operator.

Bed Cutting

- Remove one of the trenching blades and reinstall Belleville Washer, Slip Washers, and Castle Nut.
- Once equipment is started and engine is at idle, lift both trencher/ bed cutter and Safety Harness. Slip Safety Harness over far shoulder and across chest. Confirm harness carry's partial load of machine.
- At which ever end of the bed is easiest, start with the machine at full throttle and ease the blade into the soil until half the blade is in ground.
- Carefully walk backwards following the bed line and excavate soil.

MAINTENANCE



WARNING: Always wear protective gloves during maintenance operations. Do not carry out maintenance with the engine hot.



WARNING: Never repair damaged cutting attachments by welding, straightening or modifying the shape.



WARNING: Don't modify the carburetor in any way in such case the engine will not run in compliance with emissions regulations.

ENGINE AND DRIVE

SEE your OEM owner's manual for proper engine Maintenance and safety protocols.

GEARBOX

Clean the Gearbox Output Shafts (between blades and Gearbox) with compressed air or a brush periodically. Overheating of Gearbox may occur due to improper ventilation.



WARNING: The Gearbox can get hot during use and may remain so for a while afterwards. You could get burnt if you touch it.

The Importance of Maintenance

Good maintenance is essential for safe, economical, and trouble-free operation. It will also help reduce air pollution.

The maintenance schedule applies to normal operating conditions. If you operate under severe conditions, such as sustained high-load or high-temperature operation, or use it in unusually wet or dusty conditions, consult your authorized servicing dealer for recommendations applicable to your individual needs and use.

To ensure the best quality and reliability, use only new, genuine TrenchBadger and Engine parts for repair and replacement.

Some of the most important safety precautions follow. However, we cannot warn you of every conceivable hazard that can arise in performing maintenance. Only you can decide whether or not you should perform a given task.



WARNING! Improperly maintaining this trencher, or failure to correct a problem before operation, can cause a malfunction in which you can be seriously hurt or killed. Always follow the inspection and maintenance recommendations and schedules in this owner's manual.



CAUTION: Failure to properly follow maintenance instructions and precautions can cause you to be seriously hurt or killed. Always follow the procedures and precautions in the owner's manual.

Gearbox Lubricant

The Gearbox lubricant is specifically selected for the internal gear type and material. **Lubricant level must be checked and maintained per maintenance schedule or prior to each use.**



WARNING: Use of any other lubricant type and/or manufacturer, or operating without proper lubricant level, will cause damage to internal gears and void warranty.

Proper lubricant: KLUBERSYNTH GH 6-320
Lubricant capacity: 0.5 fl. oz (15 ml)

DEFLECTORS

Inspect and clean both the Top and Bikini Deflectors in regulator intervals. Build up of debris could hide damage and/or necessary repair.

CONTINUAL MAINTENANCE

It is advisable to inspect the machine by a specialized technician at an authorized service network at the end of season, if used intensively, and every two years if with normal use.



ATTENTION: All maintenance operations not reported in this manual must be carried out by an authorized Service Center. To ensure steady and regular trencher/bed cutter operation, remember that parts must only be replaced with ORIGINAL SPARES.

TROUBLESHOOTING

Using Troubleshooting Chart



WARNING: Always stop unit and disconnect spark plug before performing all of the recommended remedies below except remedies that require operation of the unit.

When you have checked all the possible causes listed and you are still experiencing the problem or if you are experiencing a problem that is not listed in this chart, see your Servicing Dealer.

PROBLEM	POSSIBLE CAUSE	POSSIBLE SOLUTION
Cutting attachment running incorrectly and with high vibration	<ol style="list-style-type: none"> 1. Gearbox damaged. 2. Gearbox assembled incorrectly 3. Blade(s) assembled incorrectly 	<ol style="list-style-type: none"> 1. Replace if necessary – Contact a Servicing Dealer 2. Reassemble the Gearbox to Engine Pole with care 3. Reassembles the Blade(s) with care
Engine starts and runs, but cutting attachment is not rotating <div data-bbox="69 639 136 699" data-label="Image"> </div> <div data-bbox="140 639 389 703" data-label="Text"> <p>WARNING: Never touch the blade while the engine is running.</p> </div>	<ol style="list-style-type: none"> 1. Gearbox damaged. 2. Gearbox assembled incorrectly 3. Clutch drum damaged. 	<ol style="list-style-type: none"> 1. Replace if necessary – Contact a Servicing Dealer 2. Reassemble the Gearbox to Engine Pole with care 3. Replace if necessary – Contact a Servicing Dealer

MAINTENANCE SCHEDULE

REGULAR SERVICE PERIOD (3)		Before each use	First month or 10 Hrs	Every 3 months or 25 Hrs	Every 6 months or 50 Hrs	Every year or 100 Hrs	Every 2 years or after each 300 Hrs
ITEM	Perform at every indicated						
Blades	Check	O					
Deflector shield	Check	O					
Blade Hardware: Nuts, bolts, fasteners	Check (Retighten if necessary)	O					
Shoulder harness	Check	O					
Idle speed	Check-Adjust					O(2)	
Gear case	Lubricate	O					

- (1) Service more frequently when used in dusty areas.
- (2) These items should be serviced by your servicing dealer unless you have the proper tools and are mechanically proficient. Refer to the shop manual for service procedures.
- (3) Log hours of operation to determine proper maintenance intervals.

STORAGE



WARNING: Stop engine and allow to cool, and secure the unit before storing or transporting in a vehicle. Store unit and fuel in an area where fuel vapors cannot reach sparks or open flames from water heaters, electric motors or switches, furnaces, etc. Store unit with all guards in place. Position so that any sharp object cannot accidentally cause injury to passersby. Store the unit out of reach of children and other unauthorized persons.

1. Clean all foreign material from the trencher. Keep away from corrosive agents such as garden chemicals and de-icing salts.
2. Abide by all Federal and local regulations for the safe storage and handling of gasoline.

TECHNICAL DATA

TRENCHING ASSEMBLY

Gearbox Assy: 10:1 ratio, V-output shaft; internal lubrication
 Gearbox Lubricant: 0.5 fl. oz (15 ml); Manf./Type: KLUBERSYNTH GH 6-320
 Blades: 12" carbide tipped (standard)