


# 21x14.5cm 双面印

**POWERHORSE**

NTE item number 6114498

## CAR FOAM GUN

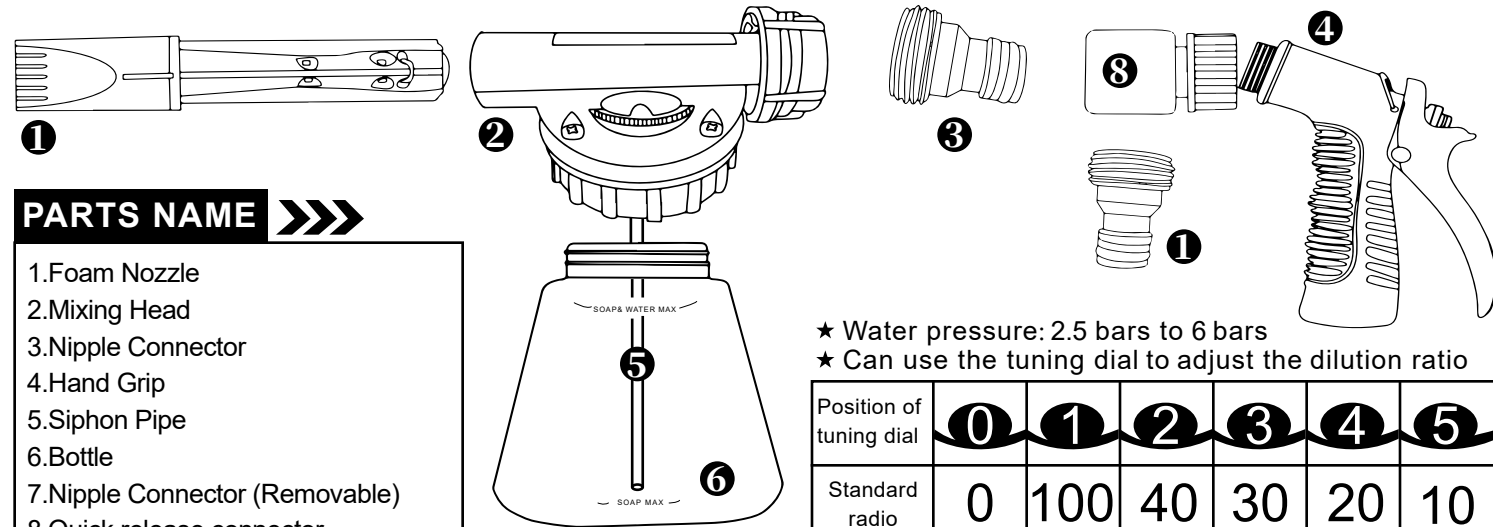

### PARTS NAME >>>

- 1.Foam Nozzle
- 2.Mixing Head
- 3.Nipple Connector
- 4.Hand Grip
- 5.Siphon Pipe
- 6.Bottle
- 7.Nipple Connector (Removable)
- 8.Quick release connector

- ★ Water pressure: 2.5 bars to 6 bars
- ★ Can use the tuning dial to adjust the dilution ratio

Position of tuning dial	0	1	2	3	4	5
Standard ratio	0	100	40	30	20	10

Turn the dial to control foam concentration: higher settings produce more foam, lower settings produce less

### ASSEMBLY >>>

- 1: Plug the siphon pipe ⑤ into the connector A of compressed-air pipe under the mixing head ②
- 2: Align four small protuberant parts of foam nozzle ① with four grooves of mixing head ② and then insert the foaming stick into B
- 3: Tighten the Nipple Connector ③ to C ,tighten the quick release connector ⑧ to D, then connect the ③ and ⑧ together.
- 4: Install the quick coupling of pistol grip ④ onto the quick connector of mixing head ② tightly
- 5: Fill an amount of detergent into the bottle and then fix the bottle to the mixing head ②

**POWERHORSE**

### HOW TO USE >>>

1. Please read the instruction manual carefully.
2. Please assemble the hose kit to the tap  
Screw the garden hose onto the connector or attach the garden hose to the quick-connect fitting and snap it onto the connector .
3. Add the right amount of washing fluid.(The capacity of the bottle is 900ml)
4. To layout diagram and adjust the graduation according to the ratio.
5. Open the tap water faucet.
6. Hold the controlling pole of Foam Gun with nozzle aiming at the object and spray foam.
7. Lay it for a proper time and then offload the foam gun and wash it
8. Remove the dirty water with rubber cleaner and then wipe it with clean car-wash cloth.
9. You must hold the controlling pole of gun closely and control the moisture after close the tap water faucet.

### PROCESS OF WASHING VEHICLE >>>

- 1: First flush the vehicle wholly with this water gun.
- 2: Connect the foamed gun head with the water gun.Spray out foam well proportioned onto the vehicle body.
- 3: Wipe the vehicle body with sponge.
- 4: Offload the foamed gun head and washing the vehicle body clearly with watergun.
- 5: Wipe the vehicle body with clean car-wash cloth.The vechile would look brand-new.

### ATTENTIONS >>>

- 1: Connect it with the tap water faucet,and tight it carefully to avoid leaking.
- 2: Please discharge the Hose kit and Foam Gun from the water faucet.  
When you don't use it
- 3: When the tap water faucet is open,please don't demount the tube or hold the Foam Gun in improper way.
- 4: Never mix with other kinds of detergents.
- 5: Please don't use it on human beings.
- 6: It is better to wear rubber gloves and safety glasses when you use it
- 7: Please dont use it for other purpose.
- 8: Please read the attentions of washing products and emergency measures.

### MAINTENANCE >>>

- In order to avoid failures ,the New Foam gun must be cleaned after use.
1. Fill clean water into the cleaned bottle to clean the mixing head a few minutes.
  2. To prevent the coagulation of detergent after drying ,please clean the mixing head after immersing in water.

### MADE IN CHINA >>>

The new low pressure foam washer is directly connected with household faucets,Which is much convenient to wash cars