


Specification

Input Voltage	120VAC ± 10%
Input Frequency	60 Hz
Output Voltage	DC 7.4V ± 0.2V DC 14.8V ± 0.2V (Select by Slide Switch)
Output Current	DC 0.5A
Input Standby Power @120V	0.20W Max.
Dielectric Withstand Voltage	AC 3.0KV for 1 min. @ 5mA leakage
Insulation Resistance	100Mohm Min. at 500VDC between Primary & Secondary
Operating Temperature	-10°C ~ +40°C
Storage Temperature	-20°C ~ +80°C
Connector	Alligator Clip
Standards	ETL/cETL (UL1310), Level IV



Due to continuous improvements to our products, product may vary slightly from depiction.

Dimensions: in(mm)

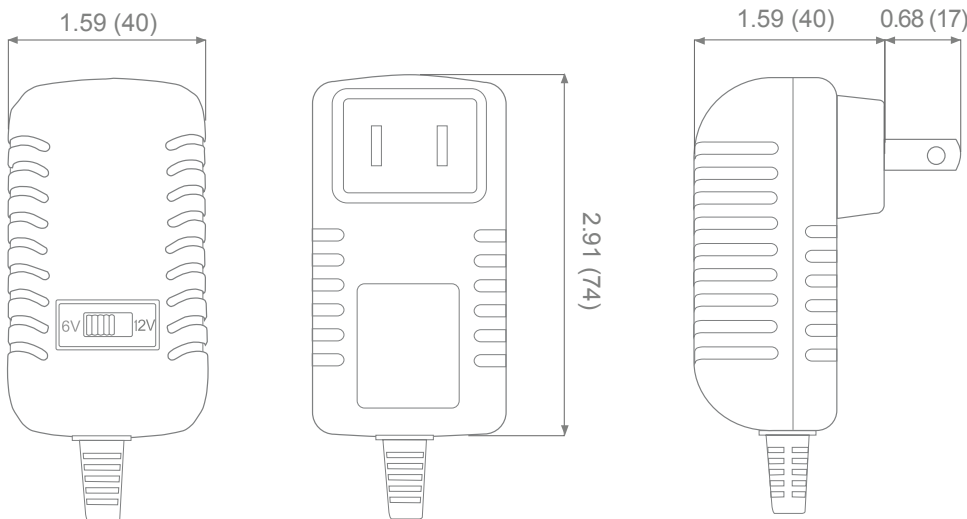

Clamshell Packaging

