



NON STRAIGHT RUNS ARE ACCEPTABLE; USE THE BOTTOM HOLE UNDER THE BASE TO PIN.

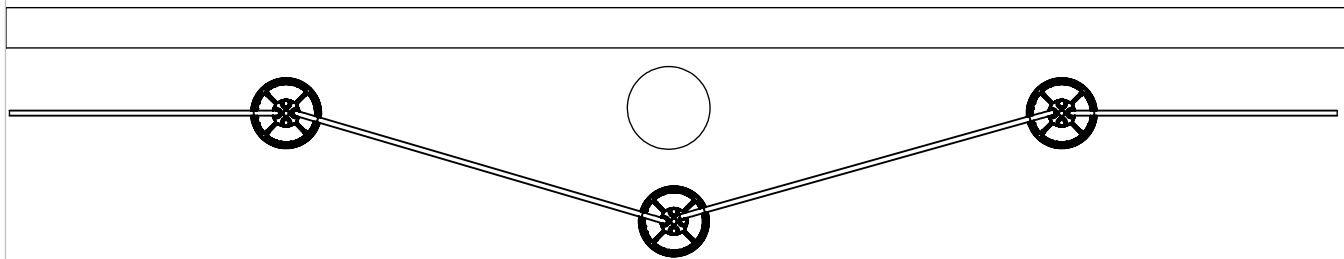


ALWAYS TERMINATE RAIL RUNS WITH A 5' "KICKER"


USE TOP PIN HOLE WHEN DOING STRAIGHT RUNS OR 90 DEGREE TURNS

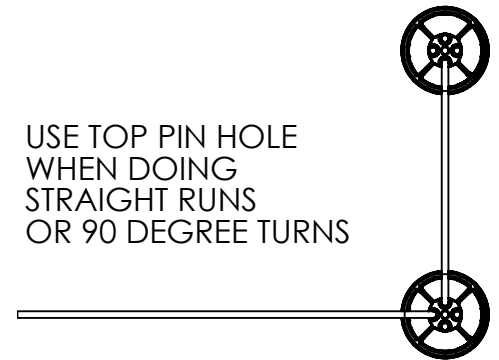


NON-LEVEL SURFACES OK: BASE WILL ALLOW A SMALL AMOUNT OF SWIVEL ENSURE BASE MAKES FULL CONTACT WITH SURFACE

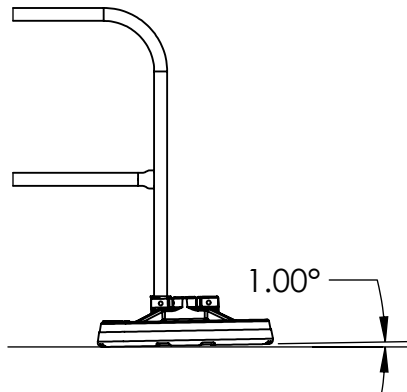

DO NOT INSTALL ON SURFACES SLOPING GREATER THAN 1/12 PITCH



DO NOT INSTALL ON SLIPPERY SURFACES SUCH AS METAL OR BARE CONCRETE CLEAN ALL OILS AND PARTICULATES (SAND,DUST,ETC...) FROM SURFACE BEFORE PLACING BASES

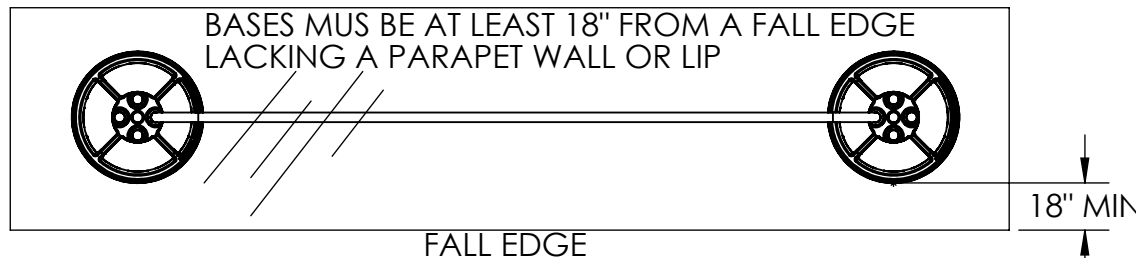

WHERE RIVER ROCK IS PRESENT: THE ROCK MUST BE CLEARED AWAY AND BASES TO BE PLACED DIRECTLY ON THE ROOF SURFACE.

Safety Rail Company LLC.
4244 Shoreline Dr.
P.O. Box 427
Spring Park, MN 55384

Toll Free: 888-434-2720
Tel: 952-471-0950
Fax: 888-471-4931
www.safetyrailcompany.com
info@safetyrailcompany.com

TITLE: SRC 360 MOBILE FALL PROTECTION ACCEPTABLE INSTALLATION		
SIZE A	DWG. NO.	REV
SCALE: 1:96	WEIGHT:	SHEET 1 OF 1