



DUAL-HEAD TRIPOD LED WORKLIGHT

Owner's Manual



PLEASE READ THESE INSTRUCTIONS CAREFULLY AND SAVE THEM, AS YOU MAY NEED THEM AT A LATER DATE.

- **WARNING:** Failure to use with specific ETL safety standards for the intended working environment (location/application) may cause serious personal injury, death, and/or property damage. This product must be assembled by a person qualified and familiar with the operation and the intended use of this fixture.
- **Warning:** For 110V 60Hz use only.

SAFETY INFORMATION

- If an extension cord is used with this unit, it must be a grounded 3-prong cord.
- Ground Fault Circuit Interrupter (GFCI) protection must be provided on circuits or outlet(s) used for outdoor or wet-location operation with this work light.
- Avoid touching the lighted area to protect yourself from heat exposure.
- Do not look directly into the light to avoid eye injury.
- Always keep the work light away from flammable material or surfaces. Never use it around volatile liquids.
- Do not use an extension cord near any place where water may accumulate.
- Keep the work light away from pools and spas.
- When plugging the unit into cord plugs (EX1 provided), keep enough slack on the cord so it cannot be pulled, which may knock over the work light.
- Make sure the tripod is placed on a flat, secure surface to avoid tipping or falling over.

PARTS INCLUDED: SEE DRAWING

No.	Part Included
1	Two floodlights (Fh1)
2	Two screws (S1)
3	Two short screw knobs (Sn1)
4	Fast connection tripod to stand (FC1)
5	Tripod stand (Ts1)
6	Handheld stand (Hs1)
7	Stand holding bar (Sh1)

IMPORTANT NOTE: The safeguards and instructions appearing on this page are not meant to cover all possible conditions and situations that may occur. It may be understood that common sense, caution, and care are factors that cannot be built into any product. The person(s) installing or operating the work light must exercise these common-sense factors.

ASSEMBLY

Figure #1: Assemble the handheld stand

- A. Attach the stand holding bar (Sh1) to the stand (Hs1). Using the two screws (S1), make sure the cord is going in a downward direction. Tighten screws fully.
- B. Attach the two lights (Fh1) using the two screw knobs (Sn1). Tighten fully.

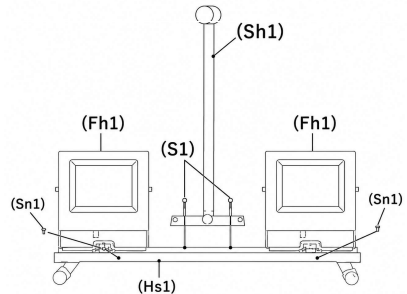


FIGURE 1

Figure #2: Attach handheld stand to the tripod stand

- A. Place the assembled handheld stand on the top of the tripod stand (Ts1).
- B. Snap-lock the fast connector to secure the handheld stand to the tripod (Fc1).

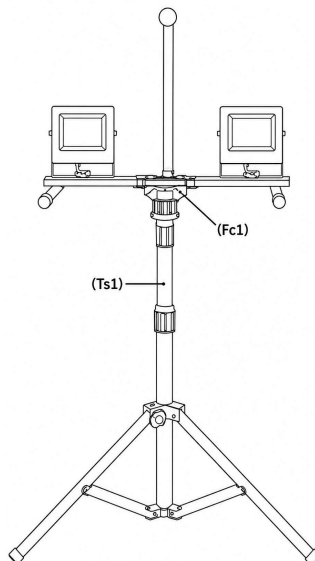


FIGURE 2

OPERATION

The handheld unit can be used with or without a tripod stand. Disconnect the fast connector to separate.

Each flood head (Fh1) can be adjusted independently. Loosen the small screw knobs (Sn1), turn it to the desired location, and tighten. Each head can also be pivoted up and down.

CLEANING & CARE

Make sure the unit is not pulled or dropped. Regularly clean the unit with a nonabrasive cleaner.

Dry the tripod and handheld unit if any water gets on the unit.

Store in a dry and secure location.

iron ton™

Distributed by:
Northern Tool & Equipment Company, Inc.
Burnsville, Minnesota 55306
www.northerntool.com

Made in Thailand