

## How to choose your dock type ?

Multinautic offers dock hardware and floats kits that combine the most popular features needed for a quality and safe residential dock system. They are designed to be strong, modular and easy to assemble. Combine fixed, semi-floating and floating dock sections to create the configuration that meets your needs. The layout you create can also evolve as it can be expanded over time.

If you have a boat, a floating dock is usually required as the dock and boat will move together with the waves. If you have not yet decided on the type of dock that will best suit your shoreline and activities, here are some suggestions to help you decide.

### FLOATING DOCK LAYOUT

A **floating** dock configuration should include a **semi-floating** dock section (also called a gangway). This section will provide the transition between the fixed dock (or the land) and the movements of the floating section. For greater stability when moving on the dock, this semi-floating dock will have 1 or 2 floats at the junction with the floating dock section.

- > A floating dock is ideal for lakes and rivers where the water level fluctuates periodically. Since the dock floats, it will always be at the same level above the water.
- > If the lake or river bottom is dropping rapidly, start your setup with a semi-floating dock section. This will follow the water level.
- > If the lake or river bottom has a gentle slope, use fixed dock sections near the shore until the water level is sufficient to install a semi-floating section (usually 3-4 feet deep) and then add one or more floating dock sections in deeper water.
- > A floating dock is not recommended for water bodies with waves higher than 3 feet as it could be damaged and damage the boat that is moored to it.
- > A floating dock is recommended in water deeper than 4 feet.



### STATIONARY DOCK LAYOUT (FIXED DOCK)

- > You can install a fixed dock in up to about 4 feet of water or it will be difficult to install. This is the ideal option for shallow water.
- > A fixed dock is recommended if bad weather causes waves up to 3 ft. If this is the case, you will need to moor the boat away from the dock or use a boat lift.
- > A fixed dock is usually installed without anchoring and should not be relied upon to hold your boat in a storm or protect it from large waves created by other boats.
- > A post dock (or fixed dock) is not recommended in water that often fluctuates more than 2 feet in a short period of time. A floating dock would be more appropriate in this case, otherwise you may have to adjust the height several times during the season.
- > Note that posts can be cut with a metal saw, a grinder or a pipe cutter.




Make small stationary dock sections to ease winter removal.

A good way to help you make the right choice of dock system is to observe your neighbors' docks. If they have been installed for a few years and are still in good condition a similar choice may be right for you.




# CONFIGURATION

Should you have any questions, do not hesitate to ask our specialists: 1-800-585-1237 or [info@multinautic.com](mailto:info@multinautic.com)

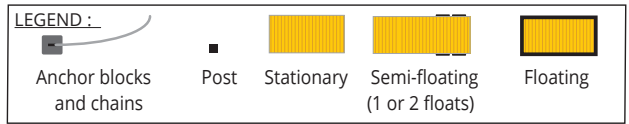

Here are some things to consider when configuring your wood dock system.

- > Think about how you will use your dock to choose the right freeboard height for your recreational and boating activities.
- > A floating section placed in a "T" shape at the end will add stability to the layout.
- > You will need chain and concrete blocks to anchor a floating dock. See our Anchoring Suggestions to determine your needs and purchase the appropriate material locally.
- > When designing your layout, take in account the location of the hinges on the dock to which it will be combined. This will determine the dock kit width to get. These hinges are sold separately (see section below).
- > To prevent low boats like kayaks from sliding under the dock, or if you would like to cover the floats, install boards all around the structure with a couple 2" x 4" bolted on vertically inside the main frame.
- > When combining our Dock Kits, if you need to install a stationary dock section to reach the minimum water depth required for the floats on your semi-floating dock, switch the 3-ft posts and the leg holders supplied with the semi-floating Dock Kit to the beginning of the stationary dock. This will allow the gangway to move freely and to adjust even more efficiently to the movement of people and waves occurring on the floating dock section.

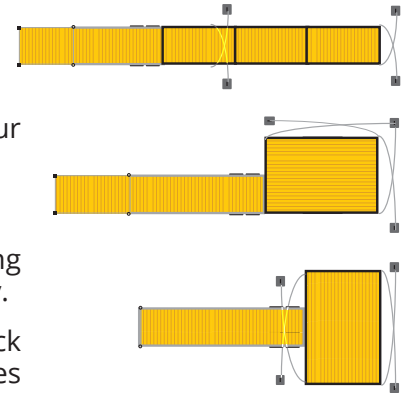

## PRODUCT SUGGESTIONS AVAILABLE ON




To create your dock layout, choose a combination of Semi-Floating and Floating Dock Kits from our Collection of Medium or High FreeBoard Docks. If needed, add one or more Stationary docks to reach the deep waters.

### Medium Freeboard

Semi-Floating	4' x 16' #19374	5' x 12' #19375			
Floating	5' x 12' #19425	5' x 16' #19429	10' x 10' #19432	8' x 16' #19434	10' x 16' #19435

### High Freeboard

Semi-Floating	4' x 16' #19376	5' x 12' #19377			
Floating	5' x 12' #19437	5' x 16' #19440	10' x 10' #19444	8' x 16' #19445	10' x 16' #19446

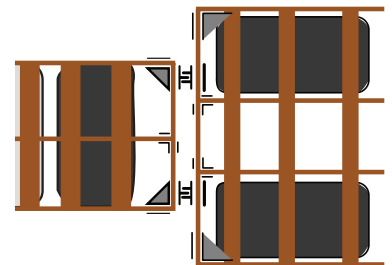

### Stationary Dock Kit

#19206 We suggest to 2 sizes (4' x 8' and 5' 10') but measurements can be adjusted to your needs.

- > Connect your docks with a pair of "Big-T" hinges. Our Dock Kits supplies enough back plates to install them properly **Model# 19133.**
- > At the same time, get the bumpers that will protect your boats, canoes, kayaks such as PVC corner or vertical bumpers, ideal for protecting the hull of boats when docking **Model# 15042 / # 10520 / #22044 WT #22045 BK**
- > Equip your dock with a heavy-duty aluminum tubular ladder that has a capacity of 400 lbs **Model# 15513.** Kids will love our ladders with small square uprights (shown). Both our straight and angled versions (popular with the less flexible folks) have ingenious hooks for easy removal from the water (250 lbs capacity) **Model# 15013 / # 15520-21-22**
- > Add one or more sets of wheels with galvanized steel hubs to simplify winter storage and spring installation or to move the dock forward or backward as water levels change **Model# 22005.**
- > Get mooring accessories to secure your watercrafts. Think of the friends who will be visiting you on the water.  
**Type "Multinautic" in [homedepot.com](https://www.homedepot.com) Search field to complete your waterfront installation with quality products.**



# ANCHORING SUGGESTIONS

These drawings, plans and/or technical specifications are only general information and can in no way replace, in whole or in part, certified engineering drawings. Please refer to the "Important information and disclaimer" section of our website.

## STATIONARY DOCK

Normally, it is not necessary to anchor a fixed dock except in areas where high waves may hit the dock. Posts driven into the ground will ensure its stability.

You should, however, moor your boat in such a way that it cannot rub or bump on the docks, thus protecting the structure and the boat.

- > Since your dock is in shallow water, it will be easy for you to install blocks to allow for detached mooring from the dock (A).
- > For more demanding conditions, you can add diagonal braces (B).
- > Some will prefer the installation of a boat lift.

## FLOATING DOCK

A floating dock system is required to have anchor blocks at the end of the dock, or approximately every 30 feet. When the dock is subjected to lateral pressures created by water, wind or boats, the blocks hold the dock in place. You should evaluate their positioning to avoid interfering with docking or swimming. Chain hooks must be installed at each anchorage point.

- > To launch them into the water, concrete blocks will be deposited and bundled on the floating dock section. To protect the dock surface, place a cardboard or piece of wood on the dock before placing the blocks.
- > The chain will then be attached to the blocks (C). Calculate the width of the dock plus the depth for each chain to create the necessary "X", but do not cut it right away.
- > Once your floating dock section is over the first location you have determined, you will tilt the group of blocks into the water (D). Beware of chain movements that will quickly follow the blocks as they fall!
- > Then hook this chain to the attachment in the opposite corner without tension.
- > Cut the chain, keeping an extra 2 ft. to allow for adjustments.
- > Repeat the steps on the opposite side and this time tighten the chain as much as possible.

## ANCHORING MATERIAL




Your local concrete products dealer will probably have heavy enough weights to serve as anchors or they can make them for you from unused concrete. Be sure to comply with municipal by-laws regarding the use of concrete at the bottom of the water. You may have to choose a different material. Your hardware dealer will provide you with the necessary chain.

- > Different types of soil, such as clay, can affect the stability of your anchors, so be careful. Muddy soil will provide a good grip for anchoring.
- > The chain used to connect the blocks to the dock should be made of galvanized steel, size 5/16" and grade 30 (regular). Choose galvanized shackles for underwater fastening. Avoid zinc-plated quick links for this use.
- > Blocks should weigh about 125 lbs. each and be rather square (+/- 1' x 1' x 1') to avoid movement on the bottom of the water (filling a bucket with cement is not a good idea since it will roll on the bottom of the water). If you make your own blocks, make an attachment point by placing a piece of chain with a bolt or a knot at its end for a better grip in the concrete.
- > Note that the concrete will lose about one third of its weight once underwater. This is why we recommend as much (below).

## MINIMUM ANCHORAGE EXAMPLES IN CALM WATER AREAS

It's advisable to anchor the dock at the 4 corners of the section where the boats will be moored (E). If you plan to accommodate other boats during the season, estimate your needs accordingly.

- > Small boats under 15' such as canoes, kayaks, rowboats or personal watercraft, (maximum of 2 boats) at least 250 lbs. per chain, on each side;
- > Pleasure craft less than 19' or approximately 2500 lbs, (maximum of 1 boat) at least 375 lbs. per chain, on each side;
- > Pleasure boat less than +/- 23' or +/- 4000 lbs. for water skiing or wakeboarding, (maximum of 1 boat) at least 500 lbs. per chain, on each side;
- > Pontoon with a canvas roof, (which can catch in the wind), at least 650 lbs. per chain, on each side.

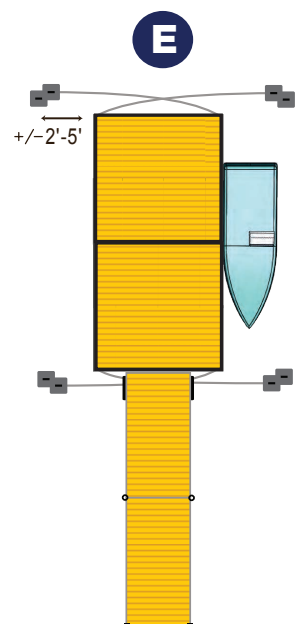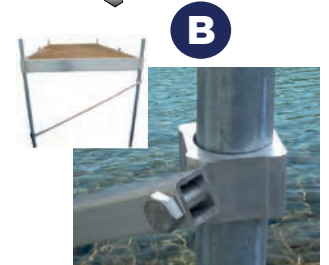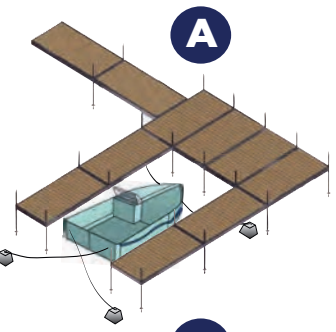

**WARNING**

These examples are intended to guide you as best as possible in planning your project. But some areas may require more anchors or a different method; we cannot list them all here. We cannot be held responsible for any incidents or damage that may occur as a result of using the techniques suggested in this document or on our website.