


FORK MOUNTED RUG-RAM - CRF-108

APPROX WEIGHT: 374.93 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

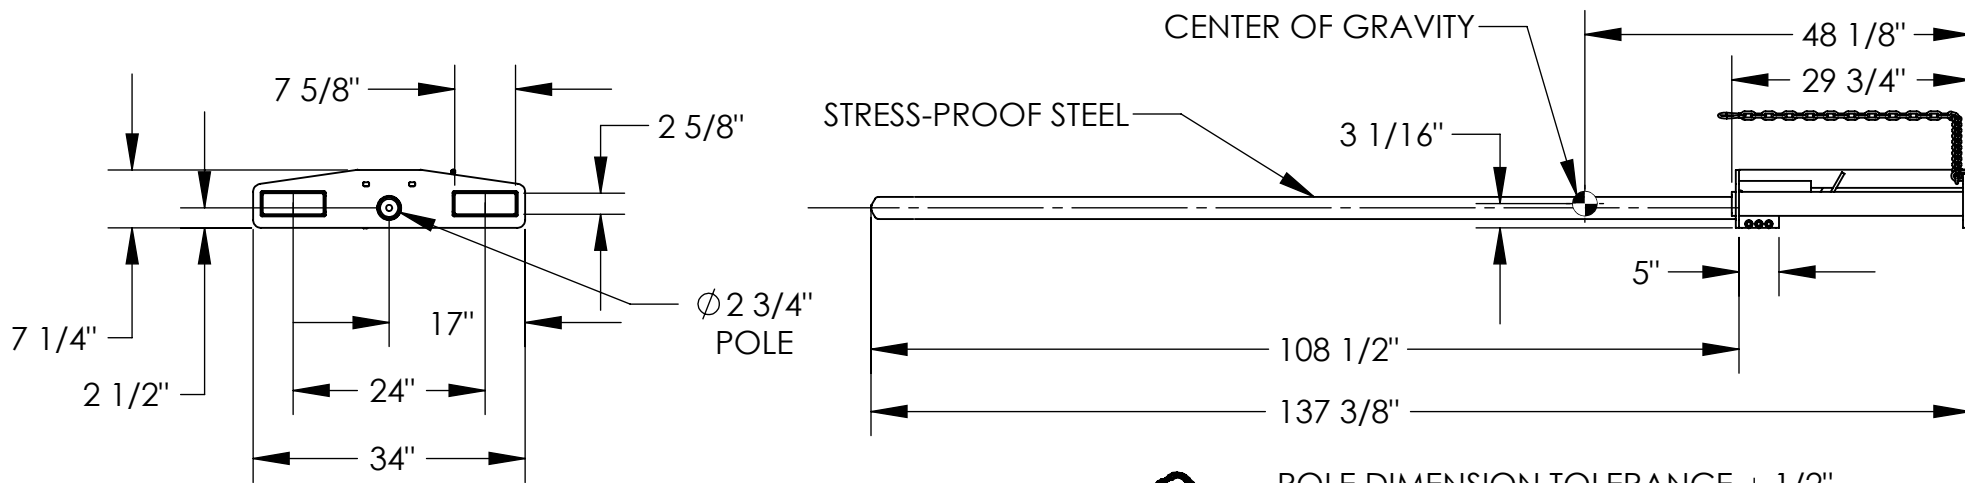

APPROX. WEIGHT / LOST LOAD = 375 LBS.

MINIMUM EFFECTIVE THICKNESS = LESS THAN 1"

VERTICAL CENTER OF GRAVITY = 3 1/16"

HORIZONTAL CENTER OF GRAVITY = 48 1/8"

NEVER EXCEED LOAD CENTER

RATING PER FORKTRUCK

MANUFACTURERS GUIDELINES.

DO NOT USE THIS FORK TRUCK

ATTACHMENT IF LOAD WILL EXCEED

FORK TRUCK MANUFACTURER'S

LOAD CENTER RATING

SAFETY RESTRAINT
CHAIN TO SECURE
UNIT TO FORK TRUCK

3-D VIEW
FOR REFERENCE

STANDARD FEATURES

MODEL NUMBER: CRF-108

CAPACITY: 2,500 LBS. UNIFORM CAPACITY

POLE LENGTH: 108 1/2"

OVERALL LENGTH: 137 3/8"

POLE DIAMETER: 2 3/4"

FORK POCKETS ARE 7 5/8" W x 2 5/8" H

USABLE ON 24" FORK CENTERS

WITH SAFETY CHAIN TO SECURE TO THE
UNIT TO THE MAST OF THE FORK TRUCK

DURABLE LIQUID PAINT

BLUE FINISH ON FRAME

SPECIAL FEATURES

NONE

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.
UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

[] As drawn [] As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING

DRAWN BY:

BJW

DATE:

1/12/2008

REFERENCE:

X

SCALE: 1:24

FILE NAME:

QUOTED LEAD TIME:

X

QUOTE #

X

08-007-156