

Continuous Performance Ceiling Exhaust

CEP, CEPD, CEPD140

Canarm's CEP fans are **ultra quiet** and easily customizable using plug and play accessories.



FEATURES (ALL MODELS)

- Ultra quiet.
- High performance and efficiency.
- Permanently lubricated 120V motor with overload disconnect.
- 6" Poly Collar with built in backdraft damper.
- Premium low profile poly grille.
- ETL listed for tub and shower when connected to a GFCI.
- Plug and Play accessories.

CEPD

- Variable speed totally enclosed DC motor with thermal protection.
- Built in speed control.
- Energy star rated (excluding model CEPD300).

CEPD140-3

- Two speed EC motor.
- 3 Selectable CFMs - 80, 110, 140 CFM
- Continuous low speed operation (adjustable).
- Time delay 5-60 minutes.
- Complies with ASHRAE 62.2 whole house fan to meet minimum ventilation required by local building codes.


ACCESSORIES

- Humidistat
- Motion Sensor
- Speed Control - internal or remote
 - Light Kit
- Ceiling Radiation Damper



CEP, CEPD & CEPD140-3 SERIES Continuous Performance Ceiling Exhaust


DIMENSIONS

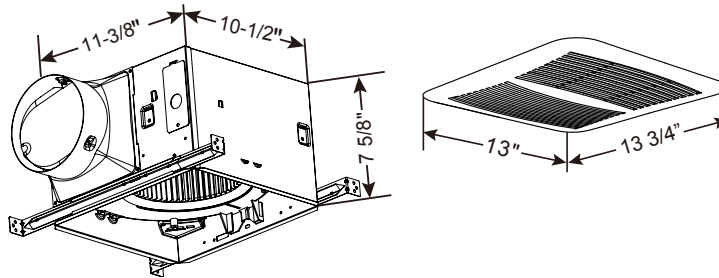

PERFORMANCE SPECIFICATIONS


MODEL	FOR BATHROOM SIZE UP TO	STATIC PRESSURE (IN W.G.)	CFM	SONES	WATTS	POWER (V/HZ)	DUCT DIAMETER
CEP80	75 FT2	0.1	80	0.7	25	120/60	6"
		0.25	69	1.2			
CEP110	105 FT2	0.1	110	0.9	32	120/60	6"
		0.25	86	1.2			
CEP150	140 FT2	0.1	150	0.5	40	120/60	6"
		0.25	123	1.2			

FAN CURVES

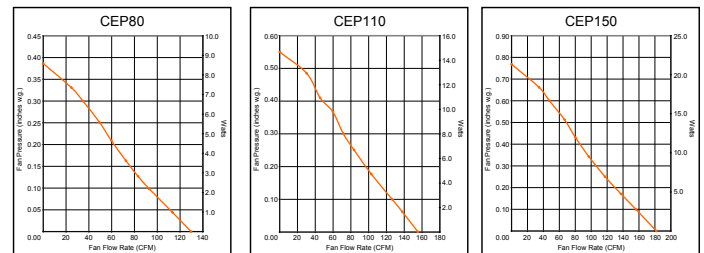


CEPD

MODEL	FOR BATHROOM SIZE UP TO	PERFORMANCE @ 0.1 IN W.G.					DUCT DIAMETER
		CFM	SONES	WATTS	POWER (V/HZ)		
CEPD150	140 FT2	150	0.9	12	120/60		6"
CEPD200	185 FT2	200	2.0	24	120/60		6"
CEPD300	275 FT2	290	4.0	52	120/60		6"



CEPD140-3

MODEL	STATIC PRESSURE (IN W.G.)	CFM	SONES	WATTS	POWER (V/HZ)	DUCT DIAMETER
CEPD140-3	0.1	80	0.3	6.0	120/60	6"
		110	0.3	9.0		
		140	0.4	13.0		
	0.25	80	1.0	11.1	120/60	6"
		108	0.8	15.0		
		136	1.0	21.0		

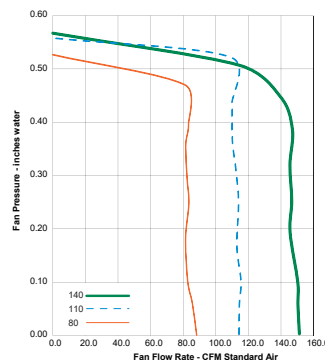

CONTROL CENTRE

