


GRABO[®]

ERGUO T

Assembly Instruction Manual

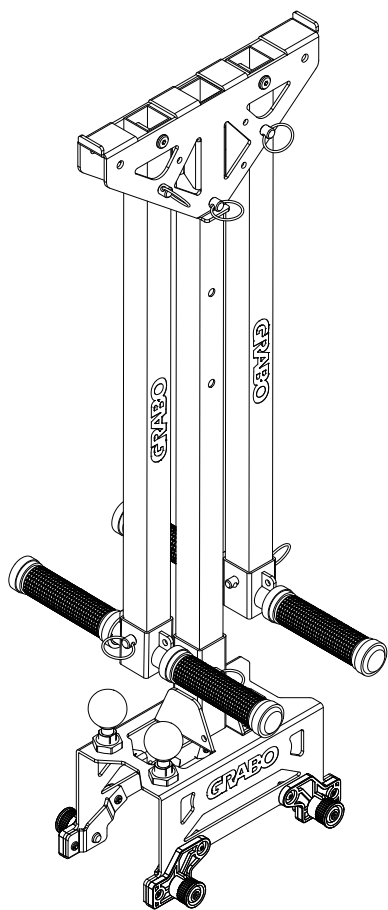

ERGUO T Assembly Instruction Manual

Introduction

The ERGUO T is the ultimate solution for maximizing the capabilities of GRABO tools. While the GRABO can safely hold up to 375 lbs (170 kg), lifting such a weight alone can be challenging. The ERGUO T extension handle allows you and a team member to share the load effectively. It features ergonomic foot controls with green for power and red for release, ensuring safe and efficient use.

Single User ERGUO-T Assembly Instructions


Parts Needed for Single User Configuration:

- Metal Hanger Bracket
- Four (4) Spring lock pins
- Two (2) Handle latch
- Vertical Stock Bar (27.5 in / 70 cm)
- One (1) Handlebar
- Exhaust pressure plate + Suction pressure plate (NEMO GRABO V1)
- Exhaust pressure plate + Suction pressure plate+ Remote control rubber cover (GRABO PRO BRUSHLESS)

Assembly Steps:


1. Prepare the Spring Lock Pins

- Locate the four Spring lock pins on the Metal Hanger Bracket.
- Pull and twist each pin until it locks in the open position.

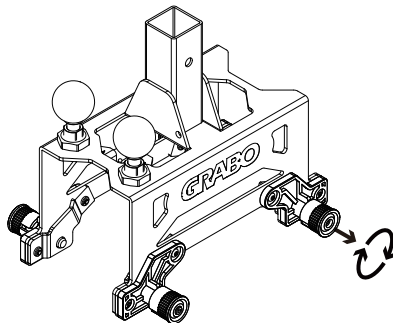


2. Attach the Metal Hanger Bracket

- Place the Metal Hanger Bracket over your GRABO tool.
- Align each of the four Spring lock pins with the metal anchor points.
- Twist release each Spring lock pin to secure it to the GRABO tool.

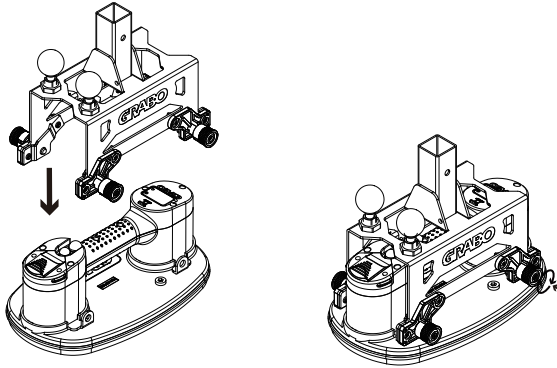


3. Insert the Vertical Stock Bar

- Insert the Vertical Stock Bar (27.5 in / 70 cm) into the top of the Metal Hanger Bracket.
- Lock it in place with one (1) Handle latch.

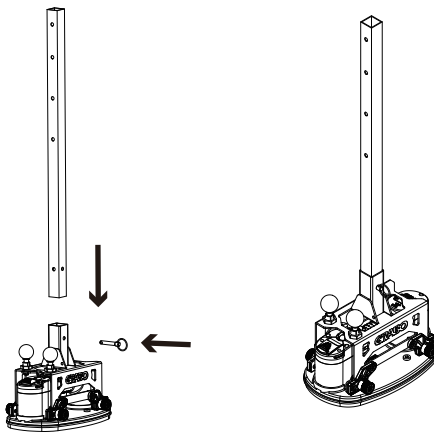


4. Attach the Handlebar

- Locate the handlebar.
- Lock it in place at the top of the Vertical Stock Bar (27.5 in / 70 cm) using one (1) Handle latch.

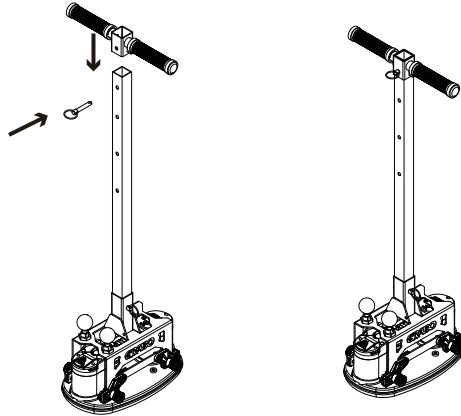

5. Adjust the Handle Height

- The Single User ERGUO T handle can be adjusted based on the user's height and usage habits.
- There are four different height options available on the Vertical Stock Bar (27.5 in / 70 cm).

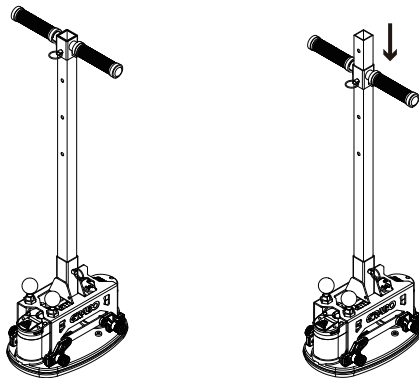

Duo Users ERGUO T Assembly Instructions


Parts Needed for Duo User Configuration:

- Metal Hanger Bracket
- Vertical Stock Bar (27.5 in / 70 cm)
- Triangle Knuckle Bracket
- Two (2) Handlebars
- Two (2) Horizontal Stock Bars (23.5 in / 60 cm)
- Four (4) Spring lock pins
- Six (6) Handle latch
- Two (2) Hex Socket Chicago Screw
- Exhaust pressure plate + Suction pressure plate (NEMO GRABO V1)
- Exhaust pressure plate + Suction pressure plate + Remote control rubber cover (GRABO PRO BRUSHLESS)

Assembly Steps:


1. Prepare the Spring Lock Pins

- Locate the four Spring lock pins on the Metal Hanger Bracket.
- Pull and twist each pin until it locks in the open position.

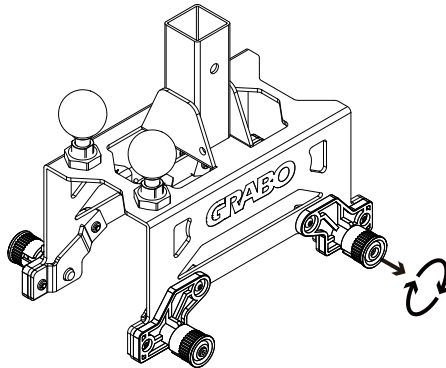


2. Attach the Metal Hanger Bracket

- Place the Metal Hanger Bracket over your GRABO tool.
- Align each of the four Spring lock pins with the metal anchor points.
- Twist release each Spring lock pin to secure it to the GRABO tool.

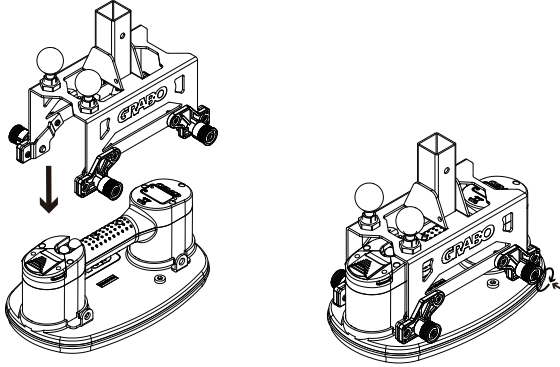


3. Insert the Vertical Stock Bar

- Insert the Vertical Stock Bar (27.5 in / 70 cm) into the top of the Metal Hanger Bracket.
- Lock it in place with one (1) Handle latch.

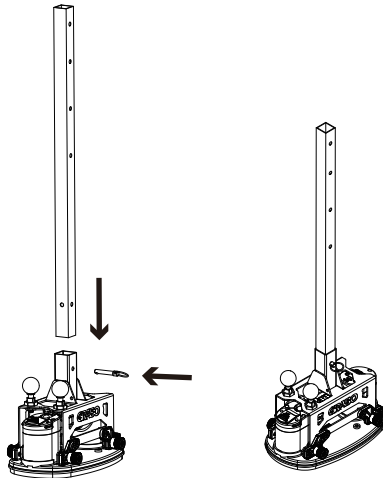


4. Attach the Triangle Knuckle Bracket

- Attach the Triangle Knuckle Bracket to the top of the Vertical Stock Bar (27.5 in / 70 cm) at your desired height.
- Secure it with one (1) Handle latch.

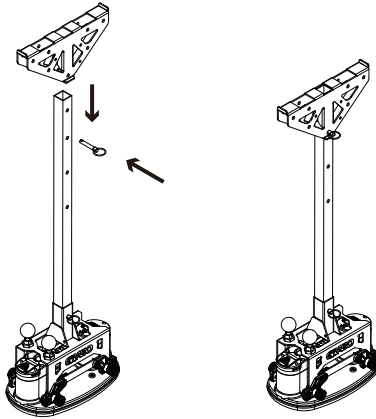


5. Install the Horizontal Stock Bars

- Use the Hex Socket Chicago Screw to secure the two (2) horizontal bars (23.5 inches/60 centimeters) to the triangular connecting bracket.

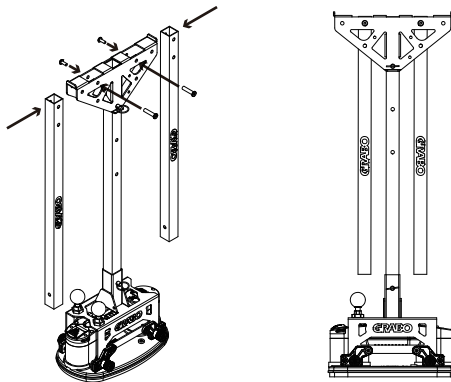


- Use one (1) Handle latch on each side to fix the crossbar in place.

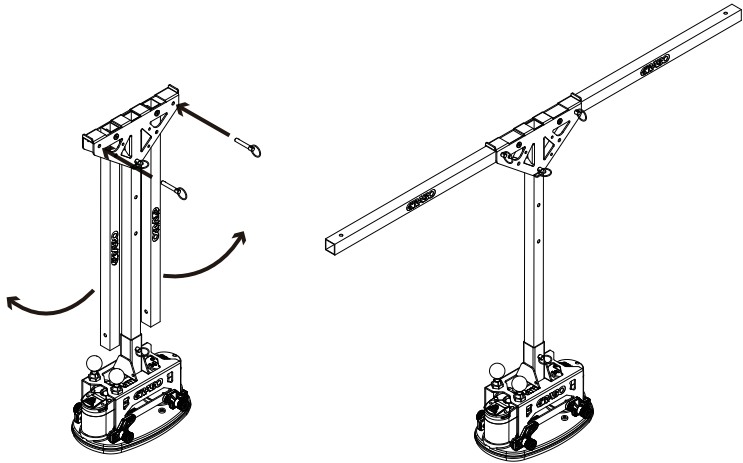


6. Attach the Handlebars

- Attach two (2) handlebars to the Horizontal Stock Bars (23.5 in / 60 cm).
- Lock each handlebar in place with one (1) Handle latch on each side.

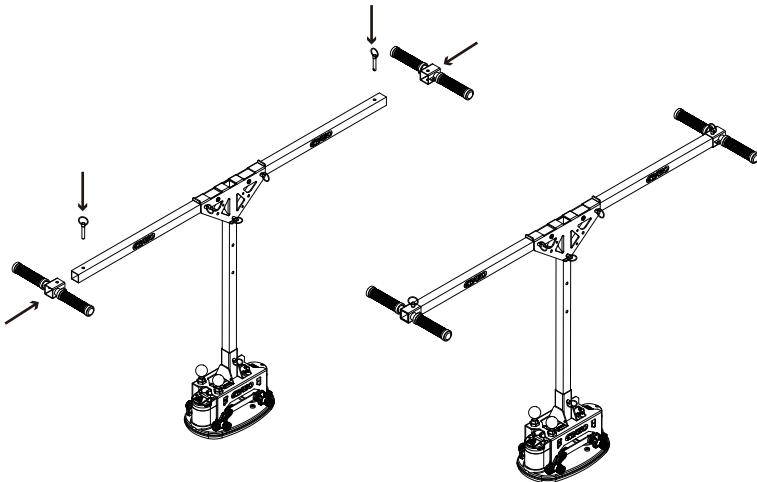


7. Adjust the Handle Height


- The Duo Users ERGUO T handle can be adjusted based on the user's height and usage habits.
- There are three different height options available.

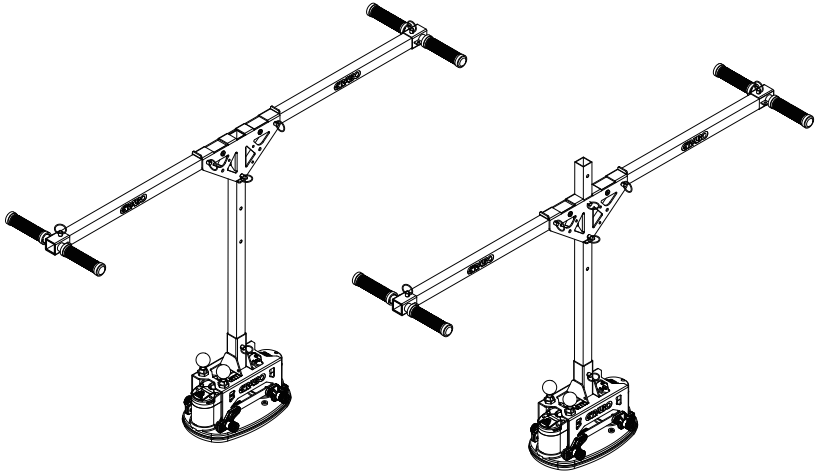

8. Remote control rubber cover can be installed when used with GRABO PRO BRUSHLESS.

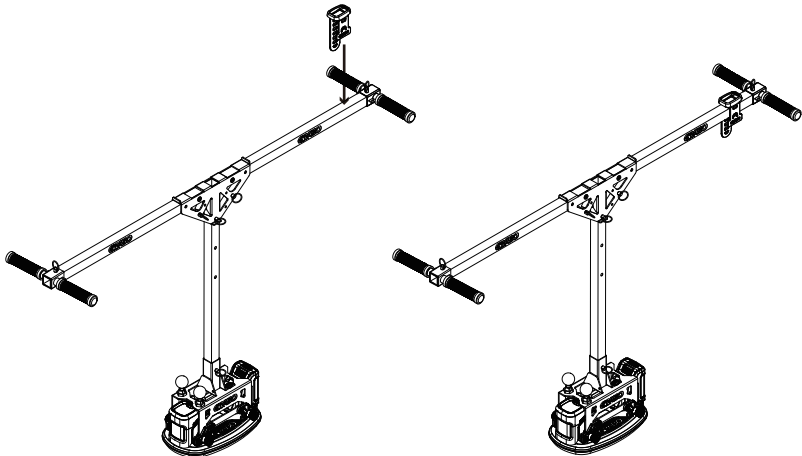


ERGUO-T Parts List

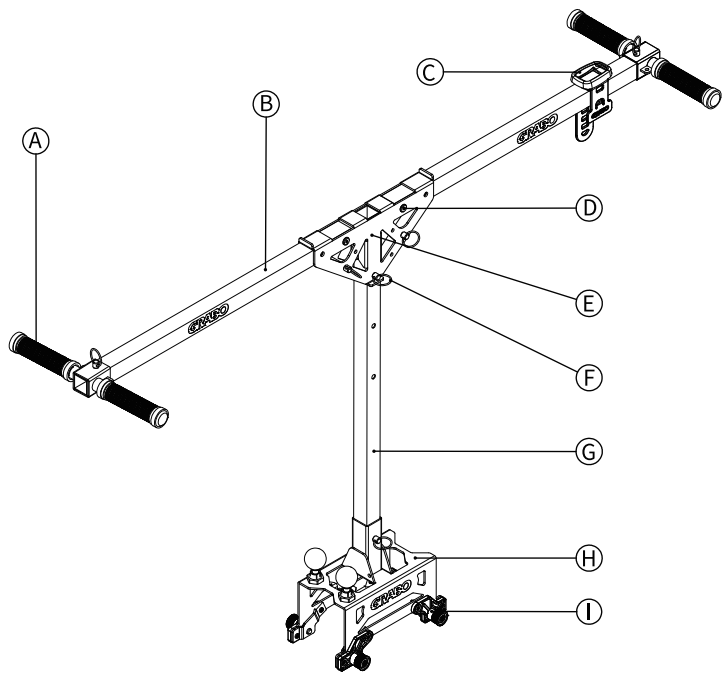

Letter	Part name	Quantity
Ⓐ	Handlebar	2
Ⓑ	Horizontal Metal Stock Bars (23.5 in / 60 cm)	2
Ⓒ	Remote control rubber cover	1
Ⓓ	Hex Socket Chicago Screw	2
Ⓔ	Triangle Knuckle Bracket	1
Ⓕ	Handle latch	6
Ⓖ	Vertical Stock Bar (27.5 in / 70 cm)	1
Ⓗ	Metal Hanger Bracket	1
Ⓘ	Spring lock pin	4

9. Replace matching parts

- The Duo Users ERGUO T handle Default for use with GRABO Pro / GRABO V2.
- Accessories can also be replaced for use with NEMO GRABO V1 / GRABO PRO BRUSHLESS

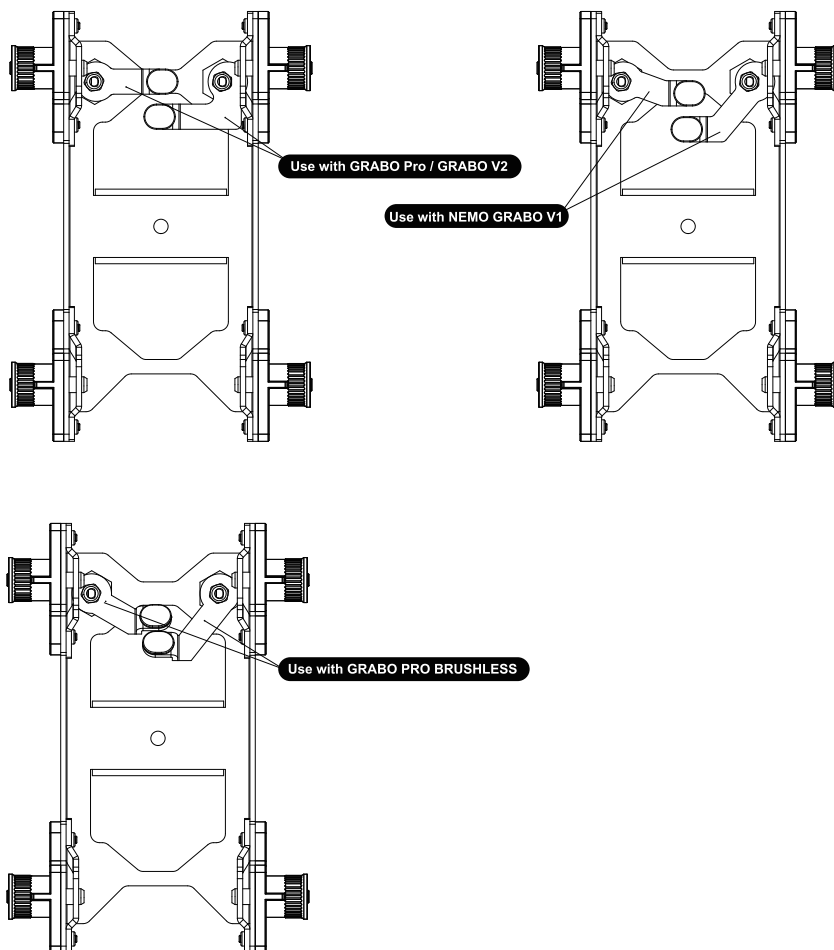

GRABO[®] ERGUO T

Jun. 2025 | Version 3

By GRABO LIMITED - www.GRABO.com