

GRABO Seam Setter Assembly Instructions



This standard seam setter for GRABO comes with the pre-assembled rails and adjustment bridges. Not pre-assembled are the two metal base plates and hardware. GRABO tools not included.

1. Secure the metal base plate to your GRABO tool with the three included M8 bottom head screws to the metal anchor points. There are three (3) holes for the screws, the missing corner is to allow space for your Nemo GRABO's pressure gauge. Repeat steps for both GRABOs.
2. Attach the GRABO tools to the rail system with the included M10*35 Rosette Thumbscrew, by fastening the thumbscrew through the black adjustment bridge onto the top facing plate's 8mm threaded hole.
3. Engage the GRABO tools vacuum pumps on two different materials to adjust the seam.
4. The adjustment bridges hold the vertical leveling thumbscrews.
5. The seam adjuster or the "push/pull" thumbscrew is located on one of the sides of the rail system.

GRABO Seam Setter Kit includes:

2x Rails
5x Bridges
4x M8 hexagon set screws
2x Rosette Thumbscrews with washer and anti-slip pads (leveling)
1x T-type Thumbscrew (push/pull)
2x M10*35 Rosette Thumbscrews (fixing metal base plates)
2x Metal base plates
6x M8 Bottom head screws
2x Nylon flat washers
4x M10 Hex nuts
2x Dowel pins

Assembly QR code:

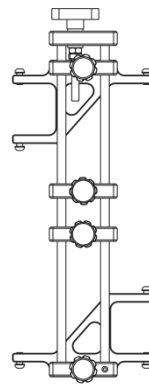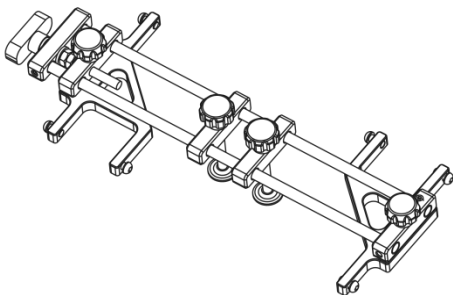

GRABO

Standard Seam Setter

1. Place the metal base plate on each GRABO and tighten the three (x3) M8 bottom head screws into the metal anchor points.



2. Align the black rail bridge over the metal base plate.



3. Insert the M10*35 thumbscrew in the hole and tighten.

