

## Application Rate Chart



Roadway De-Icing with Hypro FC-ESI110-08 Nozzle\*  
Using 5 gpm pump

**US Lane-Mile (63,360 ft-sq)**

Speed (MPH)	Rate (G/LM)
20	14
15	19
12	24
10	28
8	36
6	48
5	57
4	72

**Metric Lane-Km (3000 m-sq)**

Speed (KPH)	Rate (L/LM)
20	45
18	50
16	56
14	64
12	75
10	91
8	112

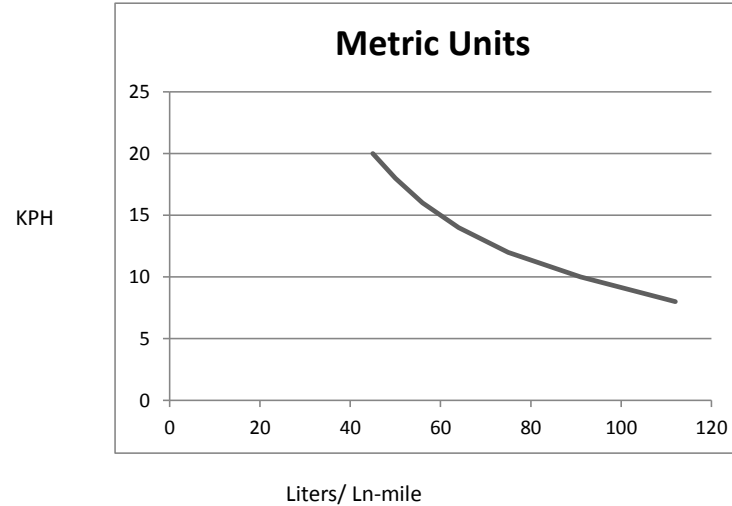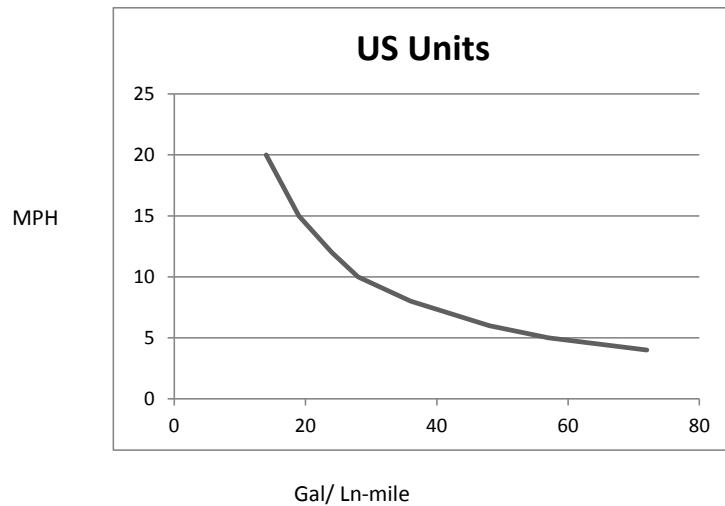

\* Values include a correction factor for specific gravity of 1.3. It does not account for variability in viscosity relative to temperature.

