



MEGA-DUTY


Legendary Reliability





For more info contact 574-218-6363

- GEN-Y Hitches shall always be used ONLY for its intended purposes
- Trailer etc. shall always be attached properly, = to GEN-Y Hitch, "For Example", (2" Ball coupler on trailer, 2" Ball on GEN-Y Hitch).
- Always have Pin/Bolts and trailer couplings properly secured on the GEN-Y Hitch, before attempting to tow (Pin on GEN-Y Hitch shall always be aligned with receiver trailer)
- GEN-Y Hitch shall always be inserted in the correct size receiver on any towing vehicle hitch (i.e. 2" receiver on GEN-Y = 2 receiver on towing vehicle hitch).
- GEN-Y Hitch shall always be secured and properly attached (with correct size bolt and/or pin) to vehicle hitch being used to tow.
- Trailer + cargo shall never exceed towing and/or tongue maximum weight limits. (As stated by manufacturer on all vehicle hitches and/or GEN-Y Hitch).

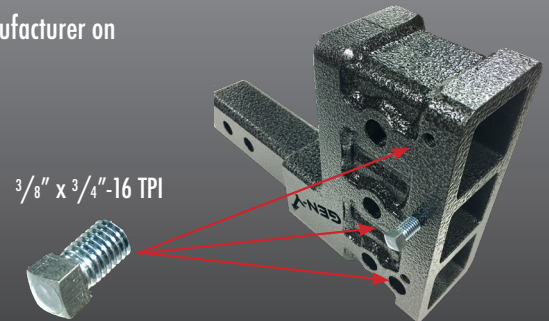

* GEN-Y Hitch "shall not" be held responsible for any or all "compatible parts or products" being used or being utilized for towing with or around GEN-Y Hitch.

* GEN-Y Hitch shall never be altered in any circumstances or for any reason and will void any warranties if done so.