

KLUTCH[®]

Wireless Connection Hearing Protector

Owner's Manual



⚠ WARNING: Read carefully and understand all ASSEMBLY AND OPERATION INSTRUCTIONS before operating. Failure to follow the safety rules and other basic safety precautions may result in serious personal injury.

Item# 5857644

READ & SAVE THESE INSTRUCTIONS

Thank you very much for choosing a Klutch product!

For future reference, please complete the owner's record below:

Serial Number/Lot Date Code (if applicable): _____

Purchase Date: _____

Save the receipt, warranty, and this manual. It is important that you read the entire manual to become familiar with this product before you begin using it.

This product is designed for certain applications only. Northern Tool & Equipment is not responsible for issues arising from modification or improper use of this product such as an application for which it was not designed. We strongly recommend that this product not be modified and/or used for any application other than that for which it was designed.

For technical questions, please call **1-800-222-5381**.

Table of Contents

| | |
|---|-------------------|
| Intended Use | 4 |
| Packaging Contents | 6 |
| Technical Specifications | 6 |
| Important Safety Information | 6 |
| Specific Operation Warnings | 错误! 未定义书签。 |
| Grounding | 8 |
| Operating Instructions | 10 |
| After Each Use | 11 |
| Maintenance | 11 |
| Troubleshooting | 11 |
| Parts List | 12 |
| Replacement Parts | 13 |
| Limited Warranty | 14 |


Intended Use

Features:

- * Advanced wireless connection function for music listening and phone calls
- * Rechargeable built-in lithium battery, working time over 40 Hours
- * NRR25dB hearing protection
- * Wireless capsule sound protection with built in radio function
- * Digital FM 87.5MHz-108MHz, AM 522KHz-1620KHz
- * Max 20 channels memory
- * Digital display screen with low battery indicator
- * 3.5mm audio input jack, offering HiFi Stereo sound with any audio playing device
- * Light weight wire steel headband, gives less pressure for the whole day for comfortable wearing

Warnings:

This ear muff helps to reduce exposure to hazardous levels of noise. Misuse of this device or failure to use this device at all times during exposure to hazardous levels of noise may result in hearing damage.

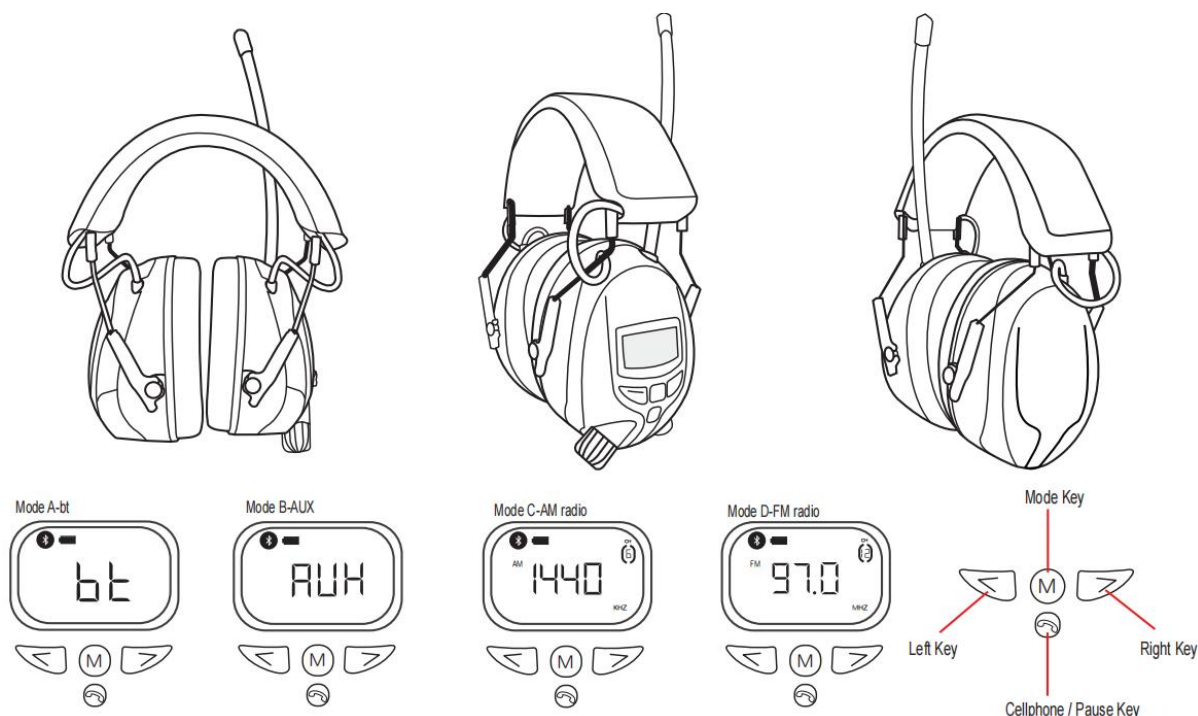



Mode A: Wireless bt mode


1. Turn On/Off power/volume knob, BT and BT symbol will be on LED display with voice indicating when wireless "bt" mode is connected. If you are in radio mode, press the Mode Key " M " to have wireless BT connected.

2. Turn on the BT function on your phone or other BT enabled device. (This function is often found in the phone's setting area) Klutch-5857644 will be listed under the device option for wireless BT. Select this to pair with your device. After device is paired, "Connected" usually appears in the settings and "bt" will appear on the LCD display.

3.Quickly/Short press Left Key “  ” to play previous / go back.

4.Quickly/Short press Right Key “  ” to play next / forward.

5.Quickly/Short press Pause Key “  ” to play / Pause.


6.Quickly/Short press Cellphone Key “  ” to answer a phone call

Mode B: AUX

1.Turn On/Off power/volume knob

2.Press Mode Key “  ” till “ AUX ” appears on the LCD display


3.Plug your device on KGS-1 via 3.5mm-“1/8” audio input jack


4.Quickly/Short press Cellphone Key “  ” to answer a phone call directly,no need to change to BT mode.


Mode C: AM radio

1.Turn On/Off power/volume knob



2.Press Mode Key “  ” till “ AM ” appears on the LCD display


3.Auto Search – Press and hold Right Key “  ” or approximately 3 seconds to automatically scan. It will stop when a clear signal is reached. Repeat until desired station is reached.

To go backward from current position , quickly/short press the Left Key “  ”

To go backward from current position to previous station, hold the Right Key “  ” for approximately 3 seconds.

Once the desired station is found, the volume can be adjusted accordingly.


4. Manual Search – Press the Right Key “  ” in quick/short press to increase frequency .Press the Pause Key “  ” to save current station, 20 stations can be saved.


5.Quickly/Short press Cellphone Key “  ” to answer a phone call directly,no need to change to BT mode.


Mode D: FM radio

1.Turn On/Off power/volume knob



2.Press Mode Key “  ” till “ FM ” appears on the LCD display


3.Auto Search – Press and hold Right Key “  ” or approximately 3 seconds to automatically scan. It will stop when a clear signal is reached. Repeat until desired station is reached.

To go backward from current position , quickly/short press the Left Key “  ”

To go backward from current position to previous station, hold the Right Key “  ” for approximately 3 seconds.

Once the desired station is found, the volume can be adjusted accordingly.

Manual Search – Press the Right Key “  ” in quick/short press to increase frequency .Press the Pause Key “  ” to save current station, 20 stations can be saved.

5.Quickly/Short press Cellphone Key “  ” to answer a phone call directly,no need to change to BT mode.

Packaging Contents

- Hearing Protector (1)
- Type-C usb cable (1)
- User Manual(1)

Technical Specifications

| Property | Specification |
|---------------------------------|------------------------------|
| Unit Weight | 315g |
| Unit Meas. | 13.6x24.6x9.6 cm |
| Working Temperature | - 10°C (14°F) - 50°C (122°F) |
| Noise Reduction Rate | 25dB |
| Wireless BT Version | 5.3 |
| Wireless BT Connecting Distance | ≥10 m (33 ft) |
| AM Frequency | 522KHz-1620KHz |
| FM Frequency | 87.5MHz-108MHz |
| Battery Voltage | 3.7V |
| Battery Capacity | 800mAh |
| Battery Recharging time | Around 70 Mins |
| Battery Running time | Over 40Hours |
| Loudspeaker Diameter | Φ40mm |
| Loudspeaker Impedance | 32Ω |
| Loudspeaker Sensitivity | 94±3dB |
| Loudspeaker Frequency | 10HZ-20000HZ |
| Rated /Max Power of Loudspeaker | 0.25W/0.5W |
| Rechargeable Cable Type | Type-C USB |
| Rechargeable Cable Length | 50CM ± 5CM |

Important Safety Information

⚠WARNING

- Read and understand all instructions. Failure to follow all instructions may result in serious injury or property damage.
- The warnings, cautions, and instructions in this manual cannot cover all possible conditions or situations that could occur. Exercise common sense and caution when using this tool. Always be aware of the environment and ensure that the tool is used in a safe and responsible manner.
- Do not allow persons to operate or assemble the product until they have read this manual and have developed a thorough understanding of how it works.
- Do not modify this product in any way. Unauthorized modification may impair the function and/or safety and could affect the life of the product. There are specific applications for which the product was designed.
- Use the right tool for the job. DO NOT attempt to force small equipment to do the work of larger industrial equipment. There are certain applications for which this equipment was designed. It will be a safer experience and do the job better at the capacity for which it was intended. DO NOT use

this equipment for a purpose for which it was not intended.

- Industrial or commercial applications must follow OSHA requirements.

⚠WARNING

PROP 65

- This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.p65warnings.ca.gov.
- Some dust created by power sanding, sawing, grinding, drilling, and other construction activities contains chemicals known to the state of California to cause cancer, birth defects, or other reproductive harm. Some examples of these chemicals are:
 - - lead from lead-based paints,
 - - crystalline silica from bricks and cement and other masonry products, and
 - - arsenic and chromium from chemically-treated lumber.
- Your risk from these exposures varies depending on how often you do this type of work. To reduce your exposure to these chemicals, work in a well-ventilated area, and work with approved safety equipment, such as dust masks that are specially designed to filter out microscopic particles.
- Handling power cords on corded products may expose you to lead, a chemical known to the state of California to cause cancer and birth defects or other reproductive harm. Wash your hands after handling.

⚠WARNING

WORK AREA SAFETY

- Inspect the work area before each use. Keep work area clean, dry, free of clutter, and well-lit. Cluttered, wet, or dark work areas can result in injury. Using the product in confined work areas may put you dangerously close to cutting tools and rotating parts.
- Do not use the product where there is a risk of causing a fire or an explosion; e.g., in the presence of flammable liquids, gases, or dust. The product can create sparks, which may ignite the flammable liquids, gases, or dust.
- Do not allow the product to come into contact with an electrical source. The tool is not insulated and contact will cause electrical shock.
- Keep children and bystanders away from the work area while operating the tool. Do not allow children to handle the product.
- Be aware of all power lines, electrical circuits, water pipes, and other mechanical hazards in your work area. Some of these hazards may be hidden from your view and may cause personal injury and/or property damage if contacted.

⚠WARNING

PERSONAL SAFETY

- Stay alert, watch what you are doing, and use common sense when operating the tool. Do not use the tool while you are tired or under the influence of drugs, alcohol, or medication. A moment of inattention while operating the tool may result in serious personal injury.
- Dress properly. Do not wear loose clothing, dangling objects, or jewelry. Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewelry, or long hair can be caught in moving parts. Air vents on the tool often cover moving parts and should be avoided.
- Wear the proper personal protective equipment when necessary. Use ANSI Z87.1 compliant safety goggles (not safety glasses) with side shields, or when needed, a face shield. Use a dust mask in dusty work conditions. Also use non-skid safety shoes, hardhat, gloves, dust collection systems, and hearing protection when appropriate. This applies to all persons in the work area.
- Do not overreach. Keep proper footing and balance at all times.

⚠CAUTION

PRODUCT USE AND CARE

- Do not force the product. Products are safer and do a better job when used in the manner for which they are designed. Plan your work and use the correct product for the job.
- Check for damaged parts before each use. Carefully check that the product will operate properly and perform its intended function. Replace damaged or worn parts immediately. Never operate the product with a damaged part.
- Store the product when it is not in use. Store it in a dry, secure place out of the reach of children. Inspect the tool for good working condition prior to storage and before re-use.
- Use only accessories that are recommended by the manufacturer for use with your product. Accessories that may be suitable for one product may create a risk of injury when used with another tool. Never use an accessory that has a lower operating speed or operating pressure than the tool itself.
- Keep guards in place and in working order. Never operate the product without the guards in place.

Grounding

⚠WARNING

- This machine must be grounded while in use to protect the operator from electrical shock. This unit is equipped with an electrical cord that has an equipment grounding conductor and a grounding plug. The plug **MUST** be plugged into a matching receptacle that is properly installed

and grounded in accordance with ALL local codes and ordinances.

- DO NOT MODIFY THE PROVIDED PLUG. If it will not fit the receptacle, have the proper receptacle installed by a qualified electrician.


CHECK with a qualified electrician or service person if you do not completely understand the grounding instructions, or if you are not sure the tool is properly grounded.

Grounded Tools: Tools with 3-Prong Plugs

Tools marked with **Grounding Required** have a 3-wire cord and 3-prong grounding plug. The plug must be connected to a properly grounded outlet. If the tool should electrically malfunction or break down, grounding provides a low resistance path to carry electricity away from the user, reducing the risk of electric shock. (See Figure A.)

The grounding prong in the plug is connected through the green wire inside the cord to the grounding system in the tool. The green wire in the cord must be the only wire connected to the tool's grounding system and must never be attached to an electrically live terminal.


Your tool must be plugged into an appropriate outlet, properly installed and grounded in accordance with all codes and ordinances. The plug and outlet should look like those in the following illustration.



Double Insulated Tools: Tools with Two-Prong Plugs

Tools marked **Double Insulated** do not require grounding. They have a special double insulation system which satisfies OSHA requirements and complies with the applicable standards of Underwriters Laboratories, Inc., the Canadian Standard Association, and the National Electrical Code. (See Figure B.)

Double insulated tools may be used in either of the 120 volt outlets shown in the following illustration.



Extension Cords

⚠WARNING

- USE A PROPER EXTENSION CORD. Make sure your extension cord is in good condition. When using an extension cord, be sure to use one heavy enough to carry the current your product will draw. An undersized cord will cause a drop in line voltage, resulting in loss of power and cause overheating.
- Be sure your extension cord is properly wired and in good condition. Always replace a damaged extension cord or have it repaired by a qualified person before using it. Protect your extension cords from sharp objects, excessive heat and damp or wet areas.

- Grounded tools require a 3-wire extension cord. Double Insulated tools can use either a 2- or 3-wire extension cord.
- As the distance from the supply outlet increases, you must use a heavier gauge extension cord. Using extension cords with inadequately sized wire causes a serious drop in voltage, resulting in loss of power and possible tool damage.
- The smaller the wire's gauge number, the greater the capacity of the cord. For example, a 14-gauge cord can carry a higher current than a 16-gauge cord. Minimum extension cord wire size is shown in the following table:

| Minimum Wire Size Of Extension Cords | | | | |
|--------------------------------------|-------------|--------|-----------------|--------|
| Nameplate AMPS | Cord Length | | | |
| | 25' | 50' | 100' | 150' |
| 0-6 | 18 AWG | 16 AWG | 16 AWG | 14 AWG |
| 6-10 | 18 AWG | 16 AWG | 14 AWG | 12 AWG |
| 10-12 | 16 AWG | 16 AWG | 14 AWG | 12 AWG |
| 12-16 | 14 AWG | 12 AWG | NOT RECOMMENDED | |


- When using more than one extension cord to make up the total length, make sure each cord contains at least the minimum wire size required.
- If you are using one extension cord for more than one tool, add the nameplate amperes and use the sum to determine the required minimum cord size.
- If you are using an extension cord outdoors, make sure it is marked with the suffix **W-A** (**W** in Canada) to indicate it is acceptable for outdoor use.
- Make sure your extension cord is properly wired and in good electrical condition. Always replace a damaged extension cord or have it repaired by a qualified electrician before using it.
- Protect your extension cords from sharp objects, excessive heat, and damp or wet areas.

Operating Instructions

⚠ WARNING

When worn properly and given adequate care your hearing protection provides excellent protection against unwanted sound. Before placing the hearing protection over your ears please turn off the power.

1. Take out the hearing protector from package
2. Extend the headband to the maximum open position and place the cups over the ears with the headband passing on top of the head.
3. With the cups fully over the ears, push the headband down until it rests comfortably on the head. Both arm extensions should be extended equally. There should be no gaps between the ear cushions and your head. Move longer hair
4. Turn on your hearing protector by rotating the volume knob ,until a “click” is heard.
5. Rotate the volume knob to adjust the volume. Make sure to turn off the hearing protector when it not used and remove the batteries.

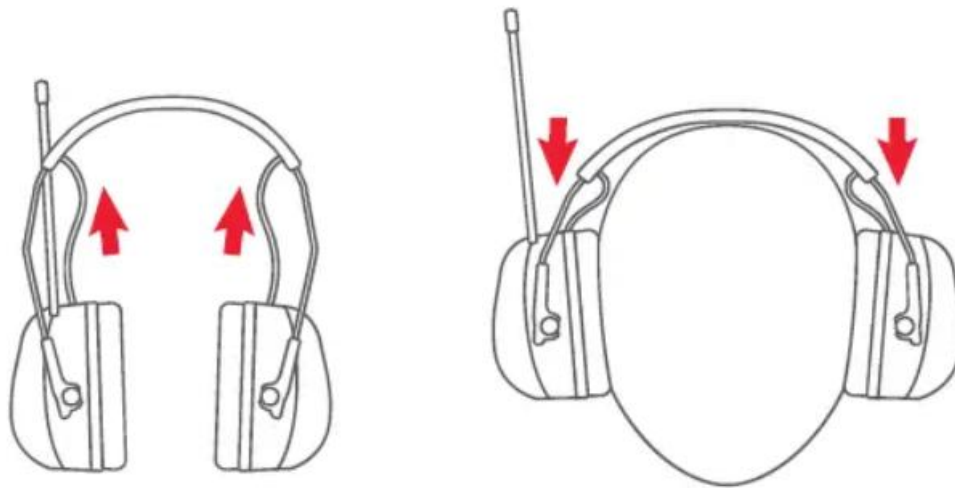

After Each Use

⚠️WARNING


Do not turn off the hearing protector after each use and store it in a dry and cool place.



Maintenance

⚠️WARNING

This ear muff should be cleaned regularly with soap and water, please keep the PCB board in dry always. Store this unit in a clean and dry area. Any damaged components or parts can compromise the muff provided by the device, if parts are broken or missing, cease use.



Troubleshooting


⚠️WARNING

Use the table below to troubleshoot problems before contacting service personnel or your local dealer. If the problem continues after troubleshooting, call your local dealer for assistance.

| Failure | Possible Cause | Corrective Action |
|---------|----------------|-------------------|
|---------|----------------|-------------------|

| | | |
|----------------------------------|-------------------------------------|--|
| Fail to power on | The hearing protector doesn't work | Recharge the battery then power it on |
| The needed mode can't be founded | Wireless "bt" mode can't be founded | Turn on the device and follow the user manual to pair the needed mode |
| | AM Mode can't be founded | |
| | FM Mode can't be founded | |
| | AUX mode can't be founded | |
| Wireless BT Can't be paired | Wireless BT doesn't work | Follow the user manual to find "bt" mode and connect it with your device |

Parts List

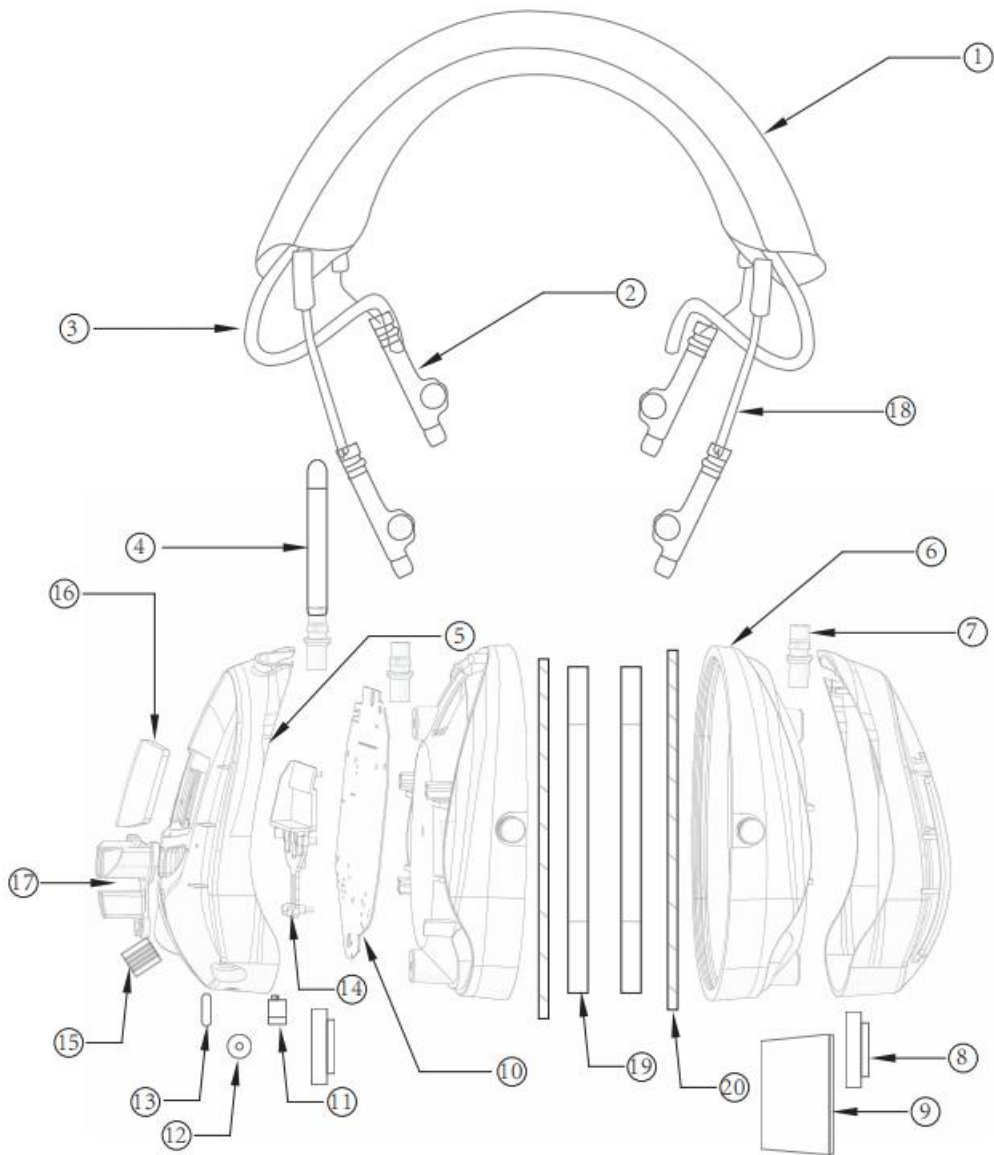

| Reference | Part Number | Part Description | Quantity |
|-----------|-------------|------------------|----------|
|-----------|-------------|------------------|----------|

| Reference | Part Number | Part Description | Quantity |
|-----------|-------------|-------------------------|----------|
| 1 | 1 | Headband pad | 1 |
| 2 | 2 | POM stand | 4 |
| 3 | 3 | Electric wire | 1 |
| 4 | 4 | Antenna | 1 |
| 5 | 5 | Outer shell | 2 |
| 6 | 6 | Bottom shell | 2 |
| 7 | 7 | Electric wire tube | 2 |
| 8 | 8 | Loudspeaker | 2 |
| 9 | 9 | Built-in Li battery | 1 |
| 10 | 10 | PCB board | 1 |
| 11 | 11 | AUX jack | 1 |
| 12 | 12 | Built-in microphone | 1 |
| 13 | 13 | Type-C jack | 1 |
| 14 | 14 | Display group | 1 |
| 15 | 15 | Power/Volume tuning | 1 |
| 16 | 16 | Display cover | 1 |
| 17 | 17 | Button group | 1 |
| 18 | 18 | Stainless wire headband | 2 |
| 19 | 19 | Ear pad | 2 |
| 20 | 20 | ABS liner | 2 |

Replacement Parts

- For replacement parts and technical questions, please call Customer Service at **1-800-222-5381**.
- Not all product components are available for replacement. The illustrations provided are a convenient reference to the location and position of parts in the assembly sequence.
- When ordering parts, the following information will be required: item description, item model number, item serial number/item lot date code, and the replacement part reference number.
- The distributor reserves the rights to make design changes and improvements to product lines and manuals without notice.

Limited Warranty

Northern Tool and Equipment Company, Inc. ("We" or "Us") warrants to the original purchaser only ("You" or "Your") that the Klutch product purchased will be free from material defects in both materials and workmanship, normal wear and tear excepted, for a period of **one year** from date of purchase. The foregoing warranty is valid only if the installation and use of the product is strictly in accordance with product instructions. There are no other warranties, express or implied, including the warranty of merchantability or fitness for a particular purpose. If the product does not comply with this limited warranty, Your sole and exclusive remedy is that We will, at our sole option and within a commercially reasonable time, either replace the product or product component without charge to You or refund the purchase price (less shipping). This limited warranty is not transferable.

Limitations on the Warranty

This limited warranty does not cover: (a) normal wear and tear; (b) damage through abuse, neglect, misuse, or as a result of any accident or in any other manner; (c) damage from misapplication, overloading, or improper installation; (d) improper maintenance and repair; and (e) product alteration in any manner by anyone other than Us, with the sole exception of alterations made pursuant to product instructions and in a workmanlike manner.

Obligations of Purchaser

You must retain Your product purchase receipt to verify date of purchase and that You are the original purchaser. To make a warranty claim, contact Us at 1-800-222-5381, identify the product by make and model number, and follow the claim instructions that will be provided. The product and the purchase receipt must be provided to Us in order to process Your warranty claim. Any returned product that is replaced or refunded by Us becomes our property. You will be responsible for return shipping costs or costs related to Your return visit to a retail store.

Remedy Limits

Product replacement or a refund of the purchase price is Your sole remedy under this limited warranty or any other warranty related to the product. We shall not be liable for: service or labor charges or damage to Your property incurred in removing or replacing the product; any damages, including, without limitation, damages to tangible personal property or personal injury, related to Your improper use, installation, or maintenance of the product or product component; or any indirect, incidental or consequential damages of any kind for any reason.

Assumption of Risk

You acknowledge and agree that any use of the product for any purpose other than the specified use(s) stated in the product instructions is at Your own risk.

Governing Law

This limited warranty gives You specific legal rights, and You also may have other rights which vary from state to state. Some states do not allow limitations or exclusions on implied warranties or incidental or consequential damages, so the above limitations may not apply to You. This limited warranty is governed by the laws of the State of Minnesota, without regard to rules pertaining to conflicts of law. The state courts located in Dakota County, Minnesota shall have exclusive jurisdiction for any disputes relating to this warranty.

KLUTCH®

Distributed by:

Northern Tool & Equipment Company, Inc.

Burnsville, Minnesota 55306

www.northerntool.com

Made in **CHINA**