

WOOD STOVE VENTING WORKSHEET

A

Determine whether you will vent the stove through the ceiling/roof ("Up") or through the wall ("Out"):

If your installation vents through the ceiling/roof ("Up"):

If your installation vents through the wall ("Out"):

Item# **Model#** **Item**
 36625 9085 DuraPlus® Basic Kit

Item# **Model#** **Item**
 36626 9088 DuraPlus® Through the Wall Kit

B

Determine how much black connector pipe you need:

If you vent through the ceiling/roof ("Up"), measure the distance from the top of the stove to the ceiling.

If you vent through the wall ("Out"), measure the distance from the top of the stove to the exit point in the wall. This includes:

- (a) the distance from the top of the stove to the 90° elbow; and
- (b) the distance from the 90° elbow to the wall.

Note: DuraBlack® connector pipe requires 18" clearance to combustibles.

Qty. Needed

Your Measurements:


Qty. Needed	Item#	Model#	Item	Your Measurements:
_____	366291	1612	12" DuraBlack® Pipe	_____
_____	366290	1624	24" DuraBlack® Pipe	_____
_____	710700	1649	Telescoping 44–68" DuraBlack® Pipe	_____
_____	36620	1692	DuraBlack® Stovepipe Kit (This kit includes two 24" pipes, a 14" slip connector and trim collar)	
_____	36619	1690	Elbow (for out venting only)	

C

To determine the chimney length, measure from the ceiling support (up) or wall trim hole (out) to roof line. Plus determine chimney height above the roof line to meet local building code.

Use the "10/2 Rule," to determine chimney height above the roofline.

- You must have 3 feet of clearance above the roofline
- Then add chimney length until you have a 10-foot clearance that is 360° around the chimney
- Once you have obtained the 10-foot clearance, you must add 2 additional feet of chimney for your total length, as shown in the illustration at right:

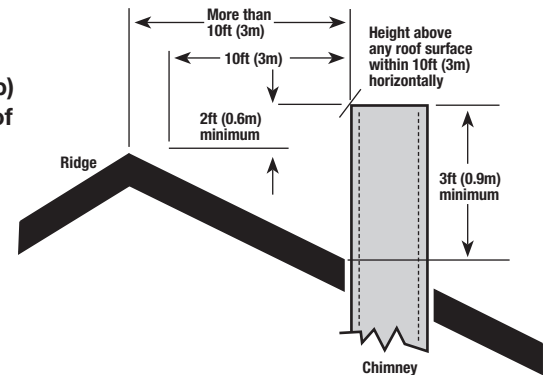

Your Measurements:

Qty. Needed

Qty. Needed	Item#	Model#	Item
_____	36627	9014	12" DuraPlus® Chimney Pipe Section
_____	36628	9017	36" DuraPlus® Chimney Pipe Section

If you are installing "through the wall," you will need support straps for every 4 feet of chimney length you install. Two straps are included in the "Through the Wall Kit" (Item# 36626). Northern offers additional straps to complete the job:

Qty. Needed

Your Measurements:

Qty. Needed	Item#	Model#	Item
_____	23184	9068	Strap

Check local building codes.